



HAM-LET COMPRESSION TUBE FITTINGS

THROUGH 2" | 2 MM THROUGH 50 MM 1/16

LET-LOK[®]



- ✓ Robust and reliable double ferrule compression tube fittings
- ✓ Available in 316/316L stainless steel, brass, and a variety of other alloys
- ✓ Size range 1/16" to 2", 2mm to 50mm




LET-LOK® HOW IT WORKS

The LET-LOK tube fitting is a mechanism used both to seal and to grip tubing. The mechanical advantage and geometry of this kind of fitting produces a leak-tight assembly.

To assemble, simply insert the tube into the complete assembly until the tube bottoms out against the shoulder of the fitting body (1). The two ferrules are driven forward between the nut (4) and fitting body using the mechanical force created by rotating the nut clockwise. The back ferrule (3) is driven against the tapered rear of the front ferrule (2). The front ferrule is driven by force into the tapered mouth of the body.

The rear ferrule is swaged radially inwards on the tube while lifting the front ferrule out to form a full-faced seal on the tapered surface of the body.

The one and one quarter turn of the nut from the hand-tight position ensures consistent drive of the sealing members. This ensures an effective seal against high-pressure as well as ultra-high-vacuum conditions.

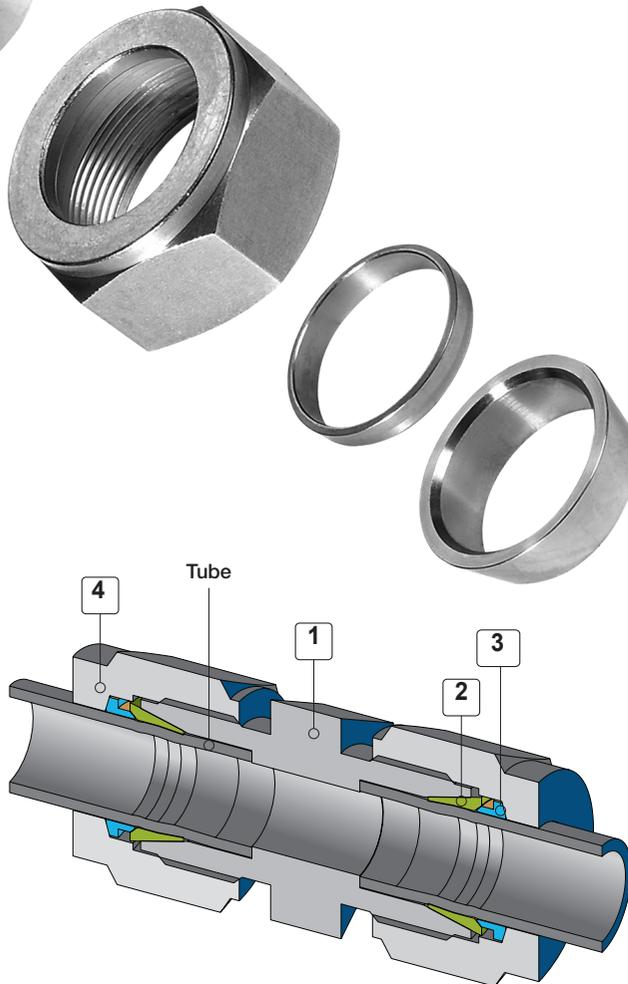

LET-LOK® TUBE FITTINGS CONSIST OF FOUR PARTS:
1. BODY 2. FRONT FERRULE 3. BACK FERRULE 4. NUT

LET-LOK TUBE FITTINGS DESCRIPTION

UCT Fluid Solutions produces high quality tube and pipe fittings in various materials for high-pressure applications.

As a result of tremendous efforts in research and development during the last five decades, UCT Fluid Solutions has gained an excellent reputation as a leading manufacturer of high-pressure instrumentation products. The LET-LOK range of connectors developed to fill the rapidly increasing demand for tube fittings suitable for high-pressure use in environments such as petrochemical, fluid, power, nuclear, electronic and other major industrial settings.

LET-LOK tube fittings were carefully manufactured to withstand the persistent demands for high-performance fluid systems. Each one passed a stringent tolerance test for high pressure, impulse, vibration, vacuum and temperature. These precision-machined fittings are manufactured to accurate standards, employing the most state-of-the-art computerized automation. All LET-LOK fittings are backed by our commitment to the highest quality-control standards and skilled craftsmanship.




LET-LOK FITTINGS INSTALLATION INSTRUCTIONS

LET-LOK fittings are assembled and supplied finger tight. Disassembly before use can allow the entry of dirt or other particles.




Insert the tubing into the LET-LOK fitting

Check that the tube rests firmly on the fitting shoulder and that the nut is finger tight. At this point it is recommended that a scribe mark be drawn on the hex of the nut extending onto the fitting body. This mark will serve as an indicator for the starting point and proper pull-up.

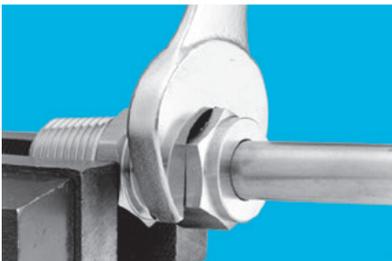

Tighten the nut

1-1/4 turns of the nut are required for 1/4" (6 mm) and higher (see Fig. A).
3/4 turn of the nut is required for 3/16" (4 mm) and lower (see Fig. B).

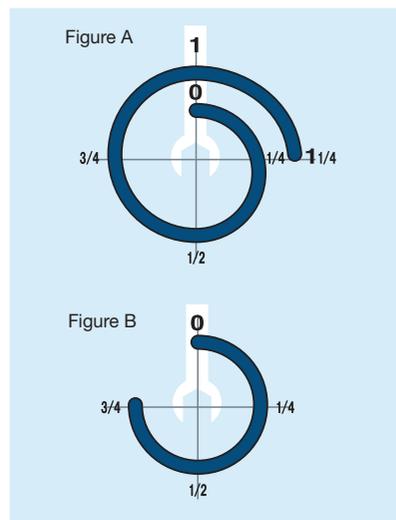

REASSEMBLY INSTRUCTIONS

LET-LOK connections may be disconnected and remade repeatedly without the loss of the leak tight seal.

1. Before disconnecting, mark the position of the nut in relation to the fitting body.
2. To reassemble, use a wrench to tighten the nut to the original position.
3. Tighten slightly with a wrench until a slight rise in torque is felt.

TUBE CUTTING

Two different methods can be used to cut tubes

1. Tube Cutter
2. Hacksaw

TUBE CUTTER

To attain a leak free connection, the tubing must be cut squarely. A good quality tube cutter with an appropriate blade for tubing material is recommended. Do not try to reduce the time of cutting by taking deep cuts with each turn of the cutter. This will work harden the tube. The end of the tube must be deburred to avoid damage to the fitting and to ensure that the tube reaches the bottom of the fitting.

HACKSAW CUTTING

In order to cut the tube with a hacksaw and obtain square ends, the tube must be cut with guide blocks.

This method of cutting necessitates deburring of the tube ends.

Warning

Do not hold the tube in a vise in the place where it will be inserted into the fitting (the vise will leave a mark on the tube that may cause leaks and ovality).

TUBE HANDLING

Scratches on the tube might cause leaks. It is, therefore, important to handle the tube carefully to reduce the risk of leaks.

PRECAUTIONS

1. Tubes must not be dragged on the floor.
2. Do not drag tubes out of the tubing.


COPPER TUBING

If using copper tubing from a roll, hold the end of the tube and roll the roll outwards allowing the tubing to lie on a flat surface.

INSPECTION GAUGE

Use: This is a "No-Go" gauge and should be used as follows:

1. Make up the fitting according to the following instructions:
1/4 inch (6mm), 3/8 inch, 1/2 inch (12mm) make up 1-1/4 turns from the finger tight position.
2. Check gap between nut and body using the appropriate sized gauge.
If the gauge slides easily into the gap, tighten the nut further until gauge cannot enter the gap.

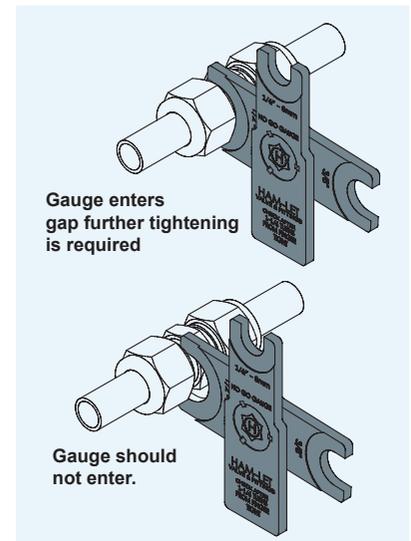

For Gauge Ordering Information, see page 102.

LET-LOK FITTINGS INSTALLATION INSTRUCTIONS

PHYSICAL DIFFERENCES AND MARKINGS

LET-LOK® METRIC FITTINGS:

Tee & Elbow: (see Fig. 1)

Body marked: MM

Straight Connectors: (see Fig. 2)

Body: Stepped shoulder

Marked: LET-LOK 316 AV1(2)

Nut: (see Figs.1 & 2) Stepped shoulder

Marked: LET-LOK 316 6M(1) SD8(2)

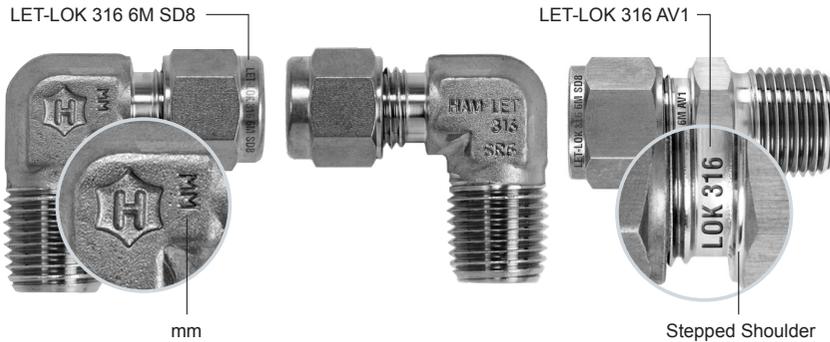


Fig. 1
Back side

1. Tube O.D. 2. Material Batch

Fig. 1
Front side

Fig. 2
Stepped Shoulder

LET-LOK® INCH FITTINGS:

Tee & Elbow: (See Fig. 3)

Straight Fittings: (see Fig. 4)

Body: Shoulder marked:

LET-LOK 316 AV2(2)

Nut: (See Fig. 3 & 4): Shoulder marked

LET-LOK 316 1/2(1) BU2(2)



Fig. 3
Back side

1. Tube O.D. 2. Material Batch

Fig. 3
Front side

Fig. 4

TUBING DATA FOR LET-LOK® FITTINGS

In order to assure maximum fitting reliability and performance, great care should be given when selecting the tubing for each application.

TUBE SELECTION

Four variables must be considered when ordering a tube for use with LET-LOK fittings:

1. Material
2. Tube wall thickness
3. Tube surface finish
4. Tube hardness

Tubing should comply with standard ASTM A213 or ASTM A269, be seamless and fully annealed. The tube must be free of scratches and suitable for bending and flaring.

TUBE O.D. TOLERANCES

1/16" - 1/8"	} ±	0.003"
2mm - 3mm		0.076 mm
3/16" - 1 1/4"	} ±	0.005"
4mm - 25mm		0.127 mm
1 1/2" - 2"	} ±	0.006"
38mm - 50mm		0.152 mm

The ovality of twice the O.D. tolerance is not suitable for LET-LOK fittings. The tube must be reasonably round.

The ends of the tube must be free of burrs.

Tubing hardness: The hardness of the tube must be lower than the hardness of the fitting material.

The hardness must not exceed Rockwell 90 HRB (200HV).

HIGH SAFETY

In applications where severe conditions and high pressure exist, we recommend the following installation procedures:

1. Check that the nut is finger tight
2. Fully insert the tube (up to the shoulder)
3. Rotate the nut with a wrench until the tube does not rotate freely
4. Mark the position of the nut
5. Rotate the nut 1-1/4 turns

This method ensures that even if the tube O.D. is at the minimum tolerance, the ferrules will be in contact with the tube for the full 1-1/4 rotation

TABLE 1: STAINLESS STEEL INCH TUBING

Tubing O.D. inch	WALL THICKNESS OF TUBE IN INCHES																
	0.010	0.012	0.014	0.016	0.020	0.028	0.035	0.049	0.065	0.083	0.095	0.109	0.120	0.134	0.156	0.188	
	Working pressure (psi)																
1/16	5600	6860	8150	9480	11890												
1/8						8550	10730										
3/16						5500	7100	10150									
1/4						4100	5200	7600	10150								
5/16							4100	5900	7975								
3/8								3350	4850	6525							
1/2								2650	3750	5150	6525						
5/8									2950	4050	5250	5945					
3/4									2450	3350	4250	4950	5655				
7/8									2050	2850	3650	4250	4843				
1										2100	2700	3200	3700	3987			
1 1/4											2400	2800	3300	3600	4100	4785	
1 1/2												2300	2700	3000	3400	4000	4785
2													2000	2200	2500	2900	3600

Annealed 304 or 316 stainless steel tubing complying with ASTM A213, A269 or equivalent specifications. For metal temp. from -20°F - 100°F (-29°C - 37°C)
 Suggested ordering information Fully annealed high quality (Type 304 or 316) stainless steel hydraulic tubing ASTM A269 or A213 or equivalent, seamless or welded and drawn with a hardness of 90HRB (200HV) or less. Tubing should be without scratches and suitable for flaring and bending

TABLE 2: STAINLESS STEEL METRIC TUBING

Tubing O.D. mm	WALL THICKNESS OF TUBE IN MM															
	0.8	1.0	1.2	1.5	1.8	2.0	2.2	2.5	2.8	3.0	3.5	4.0	4.5	5.0		
	Working pressure (bar)															
3	670															
6	310	420	540	710												
8		310	390	520												
10		240	300	400	510											
12		200	250	330	410	470										
14		160	200	270	340	380	430									
15		150	190	250	310	360	400									
16			170	230	290	330	370	400								
18			150	200	260	290	320	370								
20			140	180	230	260	290	330	380							
22			120	160	200	230	260	300	340							
25					180	200	230	260	290	320						
30					170	180	210	240	260	310						
32					160	170	200	220	240	290	330					
38							140	160	190	200	240	270	310			
50										150	180	210	240	270		

Annealed 304 or 316 stainless steel tubing complying with ASTM A213, A269 or equivalent specifications. For metal temp. from -20°F - 100°F (-29°C - 37°C)

Suggested ordering information: Fully annealed high quality (Type 304 or 316) stainless steel hydraulic tubing ASTM A269 or A213 or equivalent, seamless or welded and drawn with a hardness of 90HRB (200HV) or less. Tubing should be without scratches and suitable for flaring and bending

Working pressure for seamless tubing;
 Multiply pressure rating by .80 for single welded tubing.
 Multiply pressure rating by .85 for double welded tubing.

NOTE: The system designer and user have the sole responsibility to select products suitable for their special application requirements and to ensure the proper installation, operation and maintenance of the product. Please consider application details, material compatibility and product ratings when making your selection. Improper selection or use of products can cause property damage or personal injury

TUBING DATA

TABLE 3: COPPER TUBING WALL THICKNESS OF TUBE IN INCHES

Tubing O.D.		0.028	0.035	0.049	0.065	0.083	0.095	0.109	0.120
mm	inch								
2	1/8	2700	3600						
3	3/16	1800	2300	3400					
6	1/4	1300	1600	2500	3500				
8	5/16		1300	1900	2700				
10	3/8		1000	1600	2200				
12	1/2		800	1100	1600	2100			
16	5/8			900	1200	1600	1900		
20	3/4			700	1000	1300	1500	1800	
22	7/8			600	800	1100	1300	1500	
25	1			500	700	900	1100	1300	1500

Annealed copper seamless tubing complying with ASTM B68 and ASTM B75 specified in temper designation 060. Based on ultimate tensile strength of 30,000 psi (2067 bar). For metal temperatures from -20°C to 37°C). Suggested ordering information: High quality soft annealed seamless copper tubing ASTM B75 or equivalent

TABLE 4: FACTORS USED TO DETERMINE ALLOWABLE PRESSURE AT HIGHER TEMPERATURES

°F	°C	A.I.S.I. 316	Copper
200	93	1	0.80
400	204	0.96	0.50
600	316	0.85	-
800	427	0.79	-
1000	538	0.76	-

To determine allowable pressure at higher temperatures, multiply allowable working pressure from Tables 1 & 2 & 3 by factor shown in Table 4. For example, the allowable pressure for Type 316 stainless steel, size 1/2" OD x .049" wall at 800°F (427°C) would be equivalent to 3750 psi x .079 = 2962.5 psi

TABLE 5: GAS APPLICATION TUBING

INCH		METRIC	
Tubing O.D.	Min. Nominal Wall Thickness	Tubing O.D.	Min. Nominal Wall Thickness
-	-	mm 14	mm 1.2
-	-	mm 15	mm 1.5
-	-	mm 16	mm 1.5
1/2	0.049	mm 18	mm 1.5
5/8	0.065	mm 20	mm 1.8
3/4	0.065	mm 22	mm 2.0
7/8	0.083	mm 25	mm 2.2
1	0.083	mm 30	mm 2.8
1/4 1	0.109	mm 32	mm 3.0
1/2 1	0.134	mm 38	mm 3.5
2	0.188	mm 50	mm 5.0

Gases are characterized by small molecules which can escape through the smallest leak path. For gas applications, we recommend tubing with greater wall thickness. Table 5 shows the recommended minimum wall thickness to ensure performance

NOTE: For your safety, the system designer and user have the sole responsibility to select products suitable for their special application requirements and to ensure the proper installation, operation and maintenance of the product. Please consider application details, material compatibility and product ratings when making your selection. Improper selection or use of products can cause property damage or personal injury.

MATERIAL

Stainless steel straight fittings: material is stainless steel 316L in accordance with ASTM A479, ASTM A276 and DIN EN10272
 Stainless steel shaped fittings: material is stainless steel 316L in accordance with ASTM A182 and DIN EN10122-5

LET-LOK® FITTING VACUUM RATING

Inboard Helium Leak Rate of 1x10⁻⁹ atm cc/sec

PRESSURE RATINGS FOR TUBE FITTINGS

To ensure leak-tight systems, it is important to carefully select high-quality tubing (see page 9 - allowable working pressure).

PIPE END THREAD (NPT AND ISO 7) PRESSURE RATINGS

Allowable pressure for male and female tapered pipe thread ends: stainless steel 316 and brass.

TABLE 6: PRESSURE RATINGS

NPT / ISO PIPE SIZE	Stainless Steel 316		Brass	
	Male	Female	Male	Female
inch	psi			
1/16	11000	6700	5500	3300
1/8	10000	6500	5000	3200
1/4	8000	6600	4000	3300
3/8	7800	5300	3900	2600
1/2	7700	4900	3800	2400
3/4	7300	4600	3600	2300
1	5300	4400	2600	2200
1 1/4	6000	5000	3000	2500
1 1/2	5000	4600	2500	2300
2	3900	3900	1900	1900

Note: If the pressure on the LET-LOK® end is higher than the pipe side, then the pipe side needs a heavier wall thickness of the tapered pipe thread side

PRESSURE RATINGS FOR END FITTINGS PER SAE J1926 (LOB) AMBIENT TEMPERATURE

Pressure ratings are based on SAE J1926 at ambient temperature.

TABLE 7: PRESSURE RATINGS

(LOB) SAE J1926 Thread Size	SST 316	
	Nonpositionable	Positionable
inch	psi	
5/16 - 24	4568	4568
7/16 - 20	4568	4568
1/2 - 20	4568	4568
9/16 - 18	4568	3626
3/4 - 16	4568	3626
7/8 - 14	3626	2900
1 1/16 - 12	3626	2900
1 3/16 - 12	2900	2320
1 5/16 - 12	2900	2320
1 5/8 - 12	2320	1813
1 7/8 - 12	2320	1813
2 1/2 - 12	1813	1450

Note: 37° FLARE (AN) and LO ends can have lower pressure.

O-SEAL PORESSURE RATINGS

Stainless steel 316 O-seal fittings up to 1" and 25 mm are rated to 3000 psi.

POSITIONABLE, ISO/BSP PARALLEL THREAD (G) PRESSURE RATINGS

Pressure ratings are at surrounding temperature.

TABLE 8: PRESSURE RATINGS

(G) ISO / BSPP Male Pipe Size	SST 316
inch	psi
1/8	4568
1/4	4568
3/8	4568
1/2	2320
3/4	2320
1	2320

LET-LOK® INDEX

BACK FERRULE
760 LB



14

FRONT FERRULE
760 LF



14

TUBE INSERT
760 LI



15

NUT
761 L



15

UNION
762 L



16

REDUCING UNION
763 L



17

UNION TEE
764 L



19

REDUCING TEE
764 LR



20

UNION ELBOW
765 L



22

REDUCING UNION ELBOW
765 LR



23

FEMALE CONNECTOR
766 L



24

FEMALE CONNECTOR
766 LR



26

FEMALE CONNECTOR
766 LG



28

REDUCER
767 LT



29

PORT CONNECTOR
767 LP



32

REDUCING PORT CONNECTOR
767 LM



33

MALE CONNECTOR
768 L



34

MALE CONNECTOR
768 LR



37

MALE CONNECTOR
768 LG



39

MALE CONNECTOR
768 LOK



41

MALE CONNECTOR
768 LOB



42

MALE CONNECTOR
768 LOP



44

MALE CONNECTOR
768 LO



44

MALE PIPE WELD CONNECTOR
768 LN



45

TUBE SOCKET WELD UNION
768 LW



46

SANITARY FLANGE
768 LSF



47

TRI CLAMP FITTINGS
768 LTC



47

MALE ELBOW
769 L



48

MALE ELBOW
769 LA 45°



50

MALE ELBOW
769 LR



51

MALE ELBOW POS
769 LOB



53

MALE ELBOW POS
769 LG



55

MALE ELBOW POS
769 LOB 45°



56

MALE ELBOW POS 45°
769 LG 45°



56

MALE PIPE WELD ELBOW
769 LN



57

TUBE SOCKET WELD ELBOW
769 LW



57

REDUCING ELBOW
769 LT



58

FEMALE ELBOW
770 L



59

MALE RUN TEE
771 L



60

MALE RUN TEE POS
771 LOB



61

MALE RUN TEE POS
771 LG



61

FEMALE RUN TEE
771 LF



62

MALE BRANCH TEE
772 L



63

MALE BRANCH TEE POS
772 LOB



64

MALE BRANCH TEE POS
772 LG



65

FEMALE BRANCH TEE
772 LF



66

BULKHEAD UNION
774 L



67

BULKHEAD FEMALE CONNECTOR
774 LF



68

BULKHEAD REDUCER
774 LT



68

BULKHEAD MALE CONNECTOR
774 LM



69

BULKHEAD REDUCING UNION
775 L



70

BULKHEAD RETAINER
774 LSS



71

UNION CROSS
7102 L



72

CAP
7108 L



73

PLUG
7121 L



74

PLUG WITH LANYARD
7121 LANYARD



75

FEMALE ADAPTER TUBE TO PIPE
739 LF



76

MALE ADAPTER TUBE TO PIPE
739 LM



78

MALE ADAPTER TUBE TO PIPE
739 LMR



80

MALE ADAPTER TUBE TO PIPE
739 LMG



81

WELD ADAPTER TUBE TO PIPE
739 LN



82

SOCKET WRDL ADAPTER
739 LW



82

MALE ADAPTER TUBE TO PIPE
739 LMOB



83

LET-LOK TO AN ADAPTER
761 LFL



84

LET-LOK TO AN UNION
762 LFL



84

LET-LOK TO AN BULKHEAD UNION
774 LFL



84

MALE ADAPTER TUBE TO AN
739 LTFL



85

PARALLEL THREADS SEALING



86

MALE NUT
961 L



88

UNION
962 L



88

REDUCING UNION
963 L



88

UNION TEE
964 L



88

MALE CONNECTOR
768 LC



89

ALLOY 400 NICKEL COPPER ALLOY 400/405 CONNECTORS

90

ALLOY C-276 CONNECTORS

92

SUPER DUPLEX 2507 CONNECTORS

94

ALLOY 825 CONNECTORS

96

ALLOY 254 CONNECTORS

98

UNION DIELECTRIC 762 L DIELECTRIC



100

ACCESSORIES
Preassembly tool, tube holders, stop collar

102

LET-LOK MATERIAL DESCRIPTION

EXAMPLE:

768L

MATERIAL DESCRIPTION

SS SST 316

B Brass


1/4

X


1/4

All orders should include material description and ordering information (see product table).

760 LB BACK FERRULE

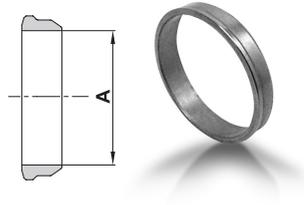

760 LF FRONT FERRULE

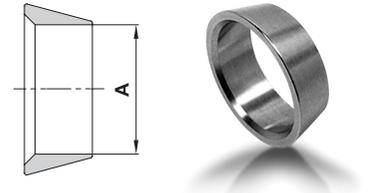

METRIC

Ordering Information	A Tube O.D.
	mm
760LB_2	2
760LB_3	3
760LB_4	4
760LB_6	6
760LB_8	8
760LB_10	10
760LB_12	12
760LB_14	14
760LB_15	15
760LB_16	16
760LB_18	18
760LB_20	20
760LB_22	22
760LB_25	25
760LB_38 ¹	38
760LB_50 ¹	50

INCH

Ordering Information	A Tube O.D.	
	inch	mm
760LB_1/16	1/16	1.58
760LB_1/8	1/8	3.17
760LB_3/16	3/16	4.76
760LB_1/4	1/4	6.35
760LB_5/16	5/16	7.93
760LB_3/8	3/8	9.52
760LB_1/2	1/2	12.70
760LB_5/8	5/8	15.87
760LB_3/4	3/4	19.05
760LB_7/8	7/8	22.22
760LB_1	1	25.40
760LB_1 1/4 ¹	1 1/4	31.75
760LB_1 1/2 ¹	1 1/2	38.10
760LB_2 ¹	2	50.80

¹Without Ferrule bar

METRIC

Ordering Information	A Tube O.D.
	mm
760LF_2	2
760LF_3	3
760LF_4	4
760LF_6	6
760LF_8	8
760LF_10	10
760LF_12	12
760LF_14	14
760LF_15	15
760LF_16	16
760LF_18	18
760LF_20	20
760LF_22	22
760LF_25	25
760LF_38 ²	38
760LF_50 ²	50

INCH

Ordering Information	A Tube O.D.	
	inch	mm
760LF_1/16	1/16	1.58
760LF_1/8	1/8	3.17
760LF_3/16	3/16	4.76
760LF_1/4	1/4	6.35
760LF_5/16	5/16	7.93
760LF_3/8	3/8	9.52
760LF_1/2	1/2	12.70
760LF_5/8	5/8	15.87
760LF_3/4	3/4	19.05
760LF_7/8	7/8	22.22
760LF_1	1	25.40
760LF_1 1/4 ²	1 1/4	31.75
760LF_1 1/2 ²	1 1/2	38.10
760LF_2 ²	2	50.80

²Without Ferrule bar



FERRULE SETS

All LET-LOK Ferrules are available as sets. Ferrule sets simplify stocking and assembly. Ferrule sets prevent damage of single ferrules during shipping. The back and front ferrules are arranged as pairs in the set; ready for easy assembly.



FERRULE & NUT SETS

All LET-LOK Ferrules and nuts are available as sets. Ferrule sets simplify stocking and assembly. Ferrule sets prevent damage of single ferrules during shipping. The front + back ferrule and nut are arranged and ready for easy assembly.

ORDERING INFORMATION FOR FERRULE SETS / FERRULE AND NUT SETS

:EXAMPLE

760

LS

SS

1/4


LS	Ferrule Sets
LNS	Ferrule and nuts sets

SS	Stainless Steel 316
B	Brass
T	PTFE

Tube O.D.
The O.D. size is always the first to be described.

Dimensions are for reference only and subject to change without notice.

760 LI TUBE INSERT

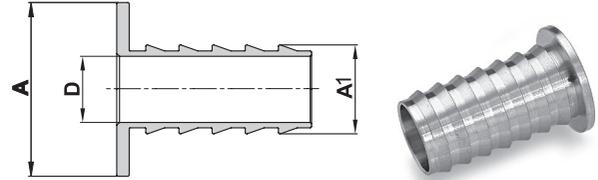


METRIC

Ordering Information	A Tube O.D.	A1 Tube I.D.	D
	mm	mm	mm
760LI_6 X 4	6	4	2.8
760LI_8 X 6	8	6	4.4
760LI_10 X 8	10	8	6.4
760LI_12 X 8	12	8	6.4
760LI_12 X 10	12	10	8.3

INCH

Ordering Information	A Tube O.D.		A1 Tube I.D.		D	
	inch	mm	inch	mm	inch	mm
760LI_3/16 X 1/8	3/16	4.76	1/8	3.17	.09	2.30
760LI_1/4 X 1/8	1/4	6.35	1/8	3.17	.09	2.30
760LI_1/4 X 0.17	1/4	6.35	.17	4.32	.11	2.70
760LI_1/4 X 3/16	1/4	6.35	3/16	4.76	.12	3.10
760LI_5/16 X 1/8	5/16	7.93	1/8	3.17	.09	2.30
760LI_5/16 X 3/16	5/16	7.93	3/16	4.76	.12	3.00
760LI_5/16 X 1/4	5/16	7.93	1/4	6.35	.18	4.65
760LI_3/8 X 3/16	3/8	9.52	3/16	4.76	.12	3.10
760LI_3/8 X 1/4	3/8	9.52	1/4	6.35	.18	4.65
760LI_1/2 X 1/4	1/2	12.70	1/4	6.35	.18	4.65
760LI_1/2 X 3/8	1/2	12.70	3/8	9.52	.31	7.80
760LI_5/8 X 3/8	5/8	15.87	3/8	9.52	.31	7.80
760LI_5/8 X 1/2	5/8	15.87	1/2	12.70	.44	11.10
760LI_3/4 X 1/2	3/4	19.05	1/2	12.70	.44	11.10
760LI_3/4 X 5/8	3/4	19.05	5/8	15.87	.56	14.20
760LI_1 X 3/4	1	25.40	3/4	19.05	.69	17.50

761 L NUT

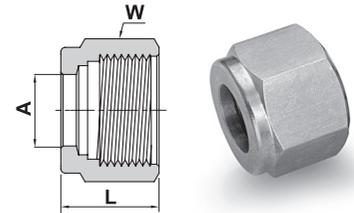

METRIC


Ordering Information	A Tube O.D.	W Hex. Flat	L
	mm	mm	mm
761L_2	2	12	11.9
761L_3	3	12	11.9
761L_4	4	12	11.9
761L_6	6	14	12.7
761L_8	8	16	13.5
761L_10	10	19	15.1
761L_12	12	22	17.4
761L_14	14	25	17.4
761L_15	15	25	17.4
761L_16	16	25	17.4
761L_18	18	30	17.4
761L_20	20	32	17.4
761L_22	22	32	17.4
761L_25	25	38	20.6
761L_38	38	60	40.6
761L_50	50	3 inch	54.0

INCH

Ordering Information	A Tube O.D.		W Hex. Flat	L	
	inch	mm	inch	inch	mm
761L_1/16	1/16	1.58	5/16	.31	7.87
761L_1/8	1/8	3.17	7/16	.47	11.93
761L_3/16	3/16	4.76	1/2	.47	11.93
761L_1/4	1/4	6.35	9/16	.50	12.70
761L_5/16	5/16	7.93	5/8	.53	13.46
761L_3/8	3/8	9.52	11/16	.56	14.22
761L_1/2	1/2	12.70	7/8	.69	17.52
761L_5/8	5/8	15.87	1	.69	17.52
761L_3/4	3/4	19.05	1 1/8	.69	17.52
761L_7/8	7/8	22.22	1 1/4	.69	17.52
761L_1	1	25.40	1 1/2	.81	20.57
761L_1 1/4	1 1/4	31.75	1 7/8	1.25	31.75
761L_1 1/2	1 1/2	38.10	2 1/4	1.50	38.10
761L_2	2	50.80	3	2.06	52.32

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

762 L UNION

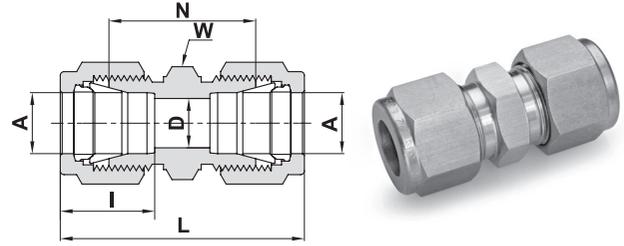

(TUBE (METRIC) TO TUBE (METRIC))

Ordering Information	A Tube O.D.		D		W Hex. Flat		N		L		I	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
762L_2	2	1.7	12	22.4	35.6	12.9						
762L_3	3	2.4	12	22.1	35.3	12.9						
762L_4	4	2.4	12	24.1	37.3	13.7						
762L_6	6	4.8	14	26.2	41.0	15.3						
762L_8	8	6.4	15	28.2	43.2	16.2						
762L_10	10	7.9	18	31.0	46.2	17.2						
762L_12	12	9.5	22	31.0	51.2	22.8						
762L_14	14	11.1	24	31.8	52.0	24.4						
762L_15	15	11.9	24	31.8	52.0	24.4						
762L_16	16	12.7	24	31.8	52.0	24.4						
762L_18	18	15.1	27	33.3	53.5	24.4						
762L_20	20	15.9	30	34.8	55.0	26.0						
762L_22	22	18.3	30	34.8	55.0	26.0						
762L_25	25	21.8	35	40.4	65.0	31.3						
762L_30	30 ¹	26.2	46	49.5	92.7	39.6						
762L_32	32 ¹	28.6	46	51.3	97.3	42						
762L_38	38 ¹	33.7	55	58.4	114.0	49.4						
762L_50	50 ¹	45.2	3 inch	71.7	146.0	65.0						


(TUBE (INCH) TO TUBE (INCH))

Ordering Information	A Tube O.D.		D		W Hex. Flat		N		L		I	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
762L_1/16	1/16	1.58	.05	1.27	5/16	.69	17.52	.99	25.14	.34	8.6	
762L_1/8	1/8	3.17	.09	2.28	7/16	.88	22.35	1.40	35.56	.50	12.7	
762L_3/16	3/16	4.76	.12	3.04	7/16	.95	24.13	1.47	37.33	.54	13.7	
762L_1/4	1/4	6.35	.19	4.82	1/2	1.03	26.16	1.61	40.89	.60	15.2	
762L_5/16	5/16	7.93	.25	6.35	9/16	1.11	28.19	1.69	42.92	.64	16.2	
762L_3/8	3/8	9.52	.28	7.11	5/8	1.19	30.22	1.77	44.95	.66	16.8	
762L_1/2	1/2	12.70	.41	10.41	13/16	1.22	30.98	2.02	51.30	.90	22.9	
762L_5/8	5/8	15.87	.50	12.70	15/16	1.25	31.75	2.05	52.07	.96	24.4	
762L_3/4	3/4	19.05	.62	15.75	1 1/16	1.31	33.27	2.11	53.59	.96	24.4	
762L_7/8	7/8	22.22	.72	18.28	1 3/16	1.37	34.80	2.17	55.11	1.02	25.9	
762L_1	1	25.40	.88	22.35	1 3/8	1.59	40.38	2.55	64.77	1.23	31.2	
762L_1 1/4	1 1/4 ¹	31.75	1.09	27.70	1 3/4	1.89	48.00	3.63	92.20	1.62	41.2	
762L_1 1/2	1 1/2 ¹	38.10	1.34	34.00	2 1/8	2.11	53.60	4.25	107.95	1.97	50.0	
762L_2	2 ¹	50.80	1.81	45.97	2 3/4	2.94	74.67	5.88	149.35	2.66	67.6	

¹Including low friction paste, paste (see page 102)

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

763 L REDUCING UNION

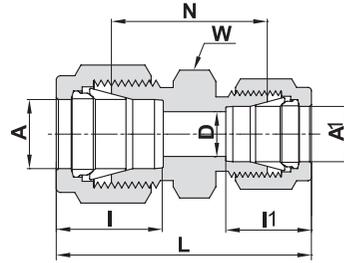

(TUBE (METRIC) TO TUBE (METRIC))

Ordering Information	A	A1	D	W Hex. Flat	N	L	I	I1
	Tube O.D.	Tube O.D.						
	mm	mm	mm	mm	mm	mm	mm	mm
763L_ 3 X 2	3	2	1.7	12	22.1	35.3	12.9	12.9
763L_ 6 X 2	6	2	1.7	14	24.6	38.6	15.3	12.9
763L_ 6 X 3	6	3	2.4	14	24.6	38.6	15.3	12.9
763L_ 6 X 4	6	4	2.4	14	25.4	39.4	15.3	13.7
763L_ 8 X 6	8	6	4.8	15	27.4	42.3	16.2	15.3
763L_ 10 X 6	10	6	4.8	18	29.5	44.5	17.2	15.3
763L_ 10 X 8	10	8	6.4	18	30.0	45.1	17.2	16.2
763L_ 12 X 6	12	6	4.8	22	29.5	47.0	22.8	15.3
763L_ 12 X 8	12	8	6.4	22	30.2	47.8	22.8	16.2
763L_ 12 X 10	12	10	7.9	22	31.0	48.7	22.8	17.2
763L_ 16 X 10	16	10	7.9	24	31.8	49.5	24.4	17.2
763L_ 16 X 12	16	12	9.5	24	31.8	52.0	24.4	22.8
763L_ 18 X 12	18	12	9.5	27	33.3	53.5	24.4	22.8
763L_ 25 X 18	25	18	15.1	35	38.6	61.0	31.3	24.4
763L_ 25 X 20	25	20	15.9	35	39.9	62.3	31.3	26.0
763L_ 30X18	30 ¹	18	15.1	46	43.7	75.4	39.6	24.4
763L_ 30X20	30 ¹	20	15.9	46	43.7	75.4	39.6	26
763L_ 30X25	30 ¹	25	21.8	46	46.2	80.1	39.6	31.3
763L_ 32X18	32 ¹	18	15.1	46	44.7	77.8	42	24.4
763L_ 32X20	32 ¹	20	15.9	46	44.7	77.8	42	26
763L_ 32X25	32 ¹	25	21.8	46	47	82.3	42	31.3
763L_ 38X30	38 ¹	*30	26.2	55	55.8	105	49.4	39.6
763L_ 38 X 20	38 ¹	20	15.9	55	49.8	87.5	49.4	26.0
763L_ 38 X 25	38 ¹	25	21.8	55	55.5	95.4	49.4	31.3


(TUBE (METRIC) TO TUBE (INCH))

Ordering Information	A	A1	D	W Hex. Flat	N	L	I	I1
	Tube O.D.	Tube O.D.						
	mm	inch	mm	mm	mm	mm	mm	mm
763L_ 2 X 1/4	2	1/4	1.7	14	24.6	38.6	12.9	15.2
763L_ 3 X 1/8	3	1/8	2.4	12	22.1	35.2	12.9	12.7
763L_ 4 X 1/8	4	1/8	2.4	12	23.4	36.5	13.7	12.7
763L_ 4 X 1/4	4	1/4	2.4	14	25.4	39.4	13.7	15.2
763L_ 6 X 1/8	6	1/8	2.4	14	24.6	38.5	15.3	12.7
763L_ 6 X 1/4	6	1/4	4.8	14	26.2	41.0	15.3	15.2
763L_ 6 X 5/16	6	5/16	4.8	14	27.4	42.3	15.3	16.2
763L_ 8 X 1/8	8	1/8	2.4	15	25.7	39.8	16.2	12.7
763L_ 8 X 1/4	8	1/4	4.8	15	27.4	42.3	16.2	15.2
763L_ 8 X 3/8	8	3/8	6.4	16	29.5	44.3	16.2	16.8
763L_ 10 X 1/8	10	1/8	2.4	18	27.7	41.8	17.2	12.7

¹Including low friction paste, see page 102 "D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

Cont'd next page

763 L
REDUCING UNION
(CONT'D)

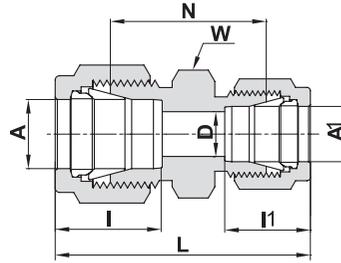

(TUBE (METRIC) TO TUBE (INCH))


Ordering Information	A		A1		D		W		N		L		I		I1	
	Tube O.D.		Tube O.D.		mm		Hex. Flat		mm		mm		mm		mm	
	mm	inch	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
763L_ 10 X 1/4	10	1/4			4.8		18		29.5		44.5		17.2		15.2	
763L_ 10 X 5/16	10	5/16			6.4		18		30.0		45.1		17.2		16.2	
763L_ 10 X 3/8	10	3/8			7.1		18		31.0		45.9		17.2		16.8	
763L_ 12 X 5/16	12	5/16			6.4		22		30.2		47.8		22.8		16.2	
763L_ 12 X 3/8	12	3/8			7.1		22		31.0		48.4		22.8		16.8	
763L_ 12 X 1/2	12	1/2			9.5		22		31.0		51.2		22.8		22.9	
763L_ 15 X 1/2	15	1/2			10.3		24		31.8		52.0		24.4		22.9	
763L_ 16 X 5/8	16	5/8			12.7		24		31.8		52.0		24.4		24.4	
763L_ 18 X 3/4	18	3/4			15.1		27		33.3		53.5		24.4		24.4	

* Including low friction paste, see page 102 "D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

(TUBE (INCH) TO TUBE (INCH))

Ordering Information	A		A1		D		W		N		L		I		I1	
	Tube O.D.		Tube O.D.		inch		Hex. Flat		inch		inch		inch		inch	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
763L_ 1/8 X 1/16	1/8	3.17	1/16	1.58	.05	1.27	7/16	.81	20.57	1.22	30.98	.50	12.7	.34	8.6	
763L_ 3/16 X 1/16	3/16	4.76	1/16	1.58	.05	1.27	7/16	.86	21.84	1.27	32.26	.54	13.7	.34	8.6	
763L_ 3/16 X 1/8	3/16	4.76	1/8	3.17	.09	2.28	7/16	.92	23.36	1.44	36.57	.54	13.7	.50	12.7	
763L_ 1/4 X 1/16	1/4	6.35	1/16	1.58	.05	1.27	1/2	.91	23.11	1.35	34.29	.60	15.2	.34	8.6	
763L_ 1/4 X 1/8	1/4	6.35	1/8	3.17	.09	2.28	1/2	.97	24.63	1.52	38.60	.60	15.2	.50	12.7	
763L_ 1/4 X 3/16	1/4	6.35	3/16	4.76	.12	3.04	1/2	1.00	25.40	1.55	37.37	.60	15.2	.54	13.7	
763L_ 5/16 X 1/8	5/16	7.93	1/8	3.17	.09	2.28	9/16	1.01	25.65	1.56	39.62	.64	16.2	.50	12.7	
763L_ 5/16 X 1/4	5/16	7.93	1/4	6.35	.19	4.82	9/16	1.08	27.43	1.66	42.16	.64	16.2	.60	15.2	
763L_ 3/8 X 1/16	3/8	9.52	1/16	1.58	.05	1.27	5/8	1.00	25.40	1.44	36.58	.66	16.8	.34	8.6	
763L_ 3/8 X 1/8	3/8	9.52	1/8	3.17	.09	2.28	5/8	1.06	26.92	1.61	40.89	.66	16.8	.50	12.7	
763L_ 3/8 X 1/4	3/8	9.52	1/4	6.35	.19	4.82	5/8	1.12	28.44	1.70	43.18	.66	16.8	.60	15.2	
763L_ 3/8 X 5/16	3/8	9.52	5/16	7.93	.25	6.35	5/8	1.16	29.46	1.74	44.19	.66	16.8	.64	16.2	
763L_ 1/2 X 1/8	1/2	12.70	1/8	3.17	.09	2.28	13/16	1.12	28.44	1.78	45.21	.90	22.9	.50	12.7	
763L_ 1/2 X 1/4	1/2	12.70	1/4	6.35	.19	4.82	13/16	1.16	29.46	1.85	46.99	.90	22.9	.60	15.2	
763L_ 1/2 X 3/8	1/2	12.70	3/8	9.52	.28	7.11	13/16	1.22	30.98	1.91	48.51	.90	22.9	.66	16.8	
763L_ 5/8 X 3/8	5/8	15.87	3/8	9.52	.28	7.11	15/16	1.25	31.75	1.94	49.27	.96	24.4	.66	16.8	
763L_ 5/8 X 1/2	5/8	15.87	1/2	12.70	.41	10.41	15/16	1.25	31.75	2.05	52.07	.96	24.4	.90	22.9	
763L_ 3/4 X 1/4	3/4	19.05	1/4	6.35	.19	4.82	1 1/16	1.25	31.75	1.94	49.28	.96	24.4	.60	15.2	
763L_ 3/4 X 3/8	3/4	19.05	3/8	9.52	.28	7.11	1 1/16	1.31	33.27	2.00	50.80	.96	24.4	.66	16.8	
763L_ 3/4 X 1/2	3/4	19.05	1/2	12.70	.41	10.41	1 1/16	1.31	33.27	2.11	53.59	.96	24.4	.90	22.9	
763L_ 3/4 X 5/8	3/4	19.05	5/8	15.87	.50	12.70	1 1/16	1.31	33.27	2.11	53.59	.96	24.4	.96	24.4	
763L_ 1 X 1/2	1	25.4	1/2	12.70	.41	10.41	1 3/8	1.50	38.10	2.38	60.45	1.23	31.2	.90	22.9	
763L_ 1 X 3/4	1	25.4	3/4	19.05	.62	15.75	1 3/8	1.50	38.10	2.38	60.45	1.23	31.2	.96	24.4	

764 L UNION TEE

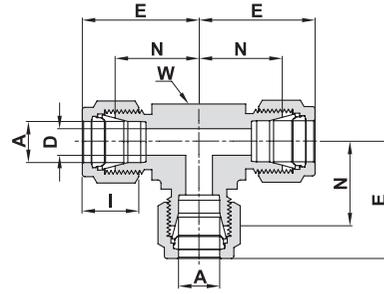

(ALL TUBE (METRIC

Ordering Information	A Tube O.D.		D		W Wrench Flat		N		E		I	
	mm	mm	mm	mm	inch	mm	mm	mm	mm	mm	mm	mm
764L_2	2		1.7		3/8	9.5	15.7		22.3		12.9	
764L_3	3		2.4		3/8	9.5	15.7		22.3		12.9	
764L_4	4		2.4		1/2	12.7	18.8		25.4		13.7	
764L_6	6		4.8		1/2	12.7	19.6		27.0		15.3	
764L_8	8		6.4		5/8	15.9	22.4		29.9		16.2	
764L_10	10		7.9		11/16	17.5	23.9		31.5		17.2	
764L_12	12		9.5		13/16	20.6	25.9		36.0		22.8	
764L_14	14		11.1		15/16	23.8	28.7		38.8		24.4	
764L_15	15		11.9		15/16	23.8	28.7		38.8		24.4	
764L_16	16		12.7		15/16	23.8	28.7		38.8		24.4	
764L_18	18		15.1		1 1/16	27.0	29.7		39.8		24.4	
764L_20	20		15.9		1 3/8	34.9	34.5		44.6		26.0	
764L_22	22		18.3		1 3/8	34.9	34.5		44.6		26.0	
764L_25	25		21.8		1 3/8	34.9	36.8		49.1		31.3	
764L_30	30 ¹		26.2		-	46	48.3		69.9		39.6	
764L_32	32 ¹		28.6		-	46	49.3		72.3		42	
764L_38	38 ¹		33.7		-	55.0	56.4		84.0		49.4	
764L_50	50 ¹		45.2		2 3/4	69.9	68.9		106.0		65.0	



(ALL TUBE (INCH

Ordering Information	A Tube O.D.		D		W Wrench Flat		N		E		I	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
764L_1/16	1/16	1.58	.05	1.27	3/8	9.5	.55	14.00	.70	17.80	.34	8.6
764L_1/8	1/8	3.17	.09	2.28	3/8	9.5	.62	15.74	.88	22.35	.50	12.7
764L_3/16	3/16	4.76	.12	3.04	1/2	12.7	.70	17.80	.96	24.40	.54	13.7
764L_1/4	1/4	6.35	.19	4.82	1/2	12.7	.77	19.55	1.06	26.90	.60	15.2
764L_5/16	5/16	7.93	.25	6.35	5/8	15.9	.88	22.35	1.17	29.71	.64	16.2
764L_3/8	3/8	9.52	.28	7.11	5/8	15.9	.91	23.11	1.20	30.48	.66	16.8
764L_1/2	1/2	12.70	.41	10.41	13/16	20.6	1.02	25.90	1.42	36.06	.90	22.9
764L_5/8	5/8	15.87	.50	12.70	15/16	23.8	1.13	28.70	1.53	38.90	.96	24.4
764L_3/4	3/4	19.05	.62	15.74	1 1/16	27.0	1.17	29.70	1.57	39.90	.96	24.4
764L_7/8	7/8	22.22	.72	18.29	1 3/8	34.9	1.36	34.54	1.76	44.70	1.02	25.9
764L_1	1	25.40	.88	22.35	1 3/8	34.9	1.45	36.83	1.93	49.00	1.23	31.2
764L_1 1/4	1 1/4 ¹	31.75	1.09	27.7	1 11/16	42.9	1.75	44.50	2.62	66.55	1.62	41.2
764L_1 1/2	1 1/2 ¹	38.10	1.34	34.0	2	50.8	2.00	50.80	3.07	77.98	1.97	50.0
764L_2	2 ¹	50.80	1.81	45.97	2 3/4	69.9	2.75	69.85	4.22	107.19	2.66	67.6

¹Including low friction paste (see page 102)

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

764 LR REDUCING TEE

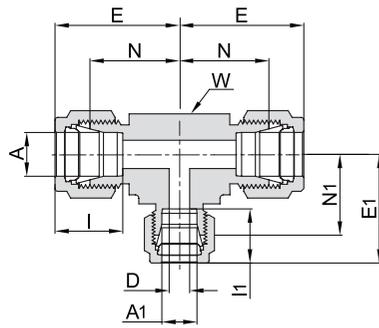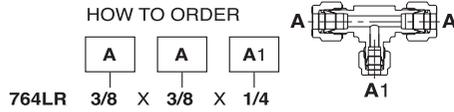

(ALL TUBE (METRIC))

Ordering Information	A Tube O.D.		A1 Tube O.D.		E		E1		I		I1		D		W Wrench Flat		N		N1		
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	inch	mm	mm	mm	mm	mm	
764LR_8MMX8MMX6MM	8	6	29.9	29.8	16.2	15.3	4.8	5/8	15.9	22.4	22.4										
764LR_10MMX10MMX6MM	10	6	31.5	31.3	17.2	15.3	4.8	11/16	17.5	23.9	23.9										
764LR_12MMX12MMX6MM	12	6	36.0	31.8	22.8	15.3	4.8	13/16	20.6	25.9	24.4										
764LR_12MMX12MMX10MM	12	10	36.0	33.5	22.8	17.2	7.9	13/16	20.6	25.9	25.9										
764LR_14MMX14MMX10MM	14	10	38.8	36.3	24.4	17.2	7.9	15/16	23.8	28.7	28.7										
764LR_18MMX18MMX12MM	18	12	39.8	39.8	24.4	22.8	9.5	1 1/16	27.0	29.7	29.7										
764LR_50MMX50MMX38MM	50 ¹	38 ¹	106.0	96.2	65.0	49.4	33.7	2 3/4	69.9	68.9	68.6										

(ALL TUBE (INCH))



Ordering Information	A Tube O.D.		A1 Tube O.D.		E		E1		I		I1		D		W Wrench Flat		N		N1	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
764LR_1/4 X 1/4 X 1/8	1/4	6.35	1/8	3.17	1.06	26.9	1.03	26.2	.60	15.2	.50	12.7	.09	2.28	1/2	12.7	.77	19.6	.77	19.6
764LR_3/8 X 3/8 X 1/4	3/8	9.52	1/4	6.35	1.20	30.5	1.14	29.0	.66	16.8	.60	15.2	.19	4.82	5/8	15.9	.91	23.1	.85	21.6
764LR_1/2 X 1/2 X 1/4	1/2	12.70	1/4	6.35	1.42	36.1	1.25	31.8	.90	22.9	.60	15.2	.19	4.82	13/16	20.6	1.02	25.9	.96	24.4
764LR_1/2 X 1/2 X 3/8	1/2	12.70	3/8	9.52	1.42	36.1	1.31	33.3	.90	22.9	.66	16.8	.28	7.11	13/16	20.6	1.02	25.9	1.02	25.9
764LR_5/8 X 5/8 X 3/8	5/8	15.88	3/8	9.52	1.53	38.9	1.42	36.1	.96	24.4	.66	16.8	.28	7.11	15/16	23.8	1.13	28.7	1.13	28.7
764LR_3/4 X 3/4 X 1/4	3/4	19.05	1/4	6.35	1.57	39.9	1.46	37.1	.96	24.4	.60	15.2	.19	4.82	1 1/16	27.0	1.17	29.7	1.17	29.7
764LR_3/4 X 3/4 X 3/8	3/4	19.05	3/8	9.52	1.57	39.9	1.46	37.1	.96	24.4	.66	16.8	.28	7.11	1 1/16	27.0	1.17	29.7	1.17	29.7
764LR_3/4 X 3/4 X 1/2	3/4	19.05	1/2	12.70	1.57	39.9	1.57	39.9	.96	24.4	.90	22.9	.41	10.41	1 1/16	27.0	1.17	29.7	1.17	29.7
764LR_1 X 1 X 3/8	1	25.4	3/8	9.52	1.93	49.0	1.65	41.9	1.23	31.2	.66	16.8	.28	7.11	1 3/8	34.9	1.45	36.8	1.36	34.5
764LR_1 X 1 X 1/2	1	25.4	1/2	12.70	1.93	49.0	1.76	44.7	1.23	31.2	.90	22.9	.41	10.41	1 3/8	34.9	1.45	36.8	1.36	34.5
764LR_1 X 1 X 3/4	1	25.4	3/4	19.05	1.93	49.0	1.76	44.7	1.23	31.2	0.96	24.4	.62	15.75	1 3/8	34.9	1.45	36.8	1.36	34.5
764LR_1 1/4 X 1 1/4 X 1	1 1/4 ¹	31.75	1	25.40	2.67	67.8	2.17	55.1	1.62	41.2	1.23	31.2	.88	22.35	1 11/16	42.9	1.75	44.5	1.69	42.9
764LR_1 1/2 X 1 1/2 X 1	1 1/2 ¹	38.10	1	25.40	3.10	78.7	2.36	59.9	1.97	50.0	1.23	31.2	.88	22.35	2	50.8	2.00	50.8	1.88	47.8

¹Including low friction paste (see page 102)

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.



Cont'd next page

764 LR
REDUCING TEE
 (CONT'D)

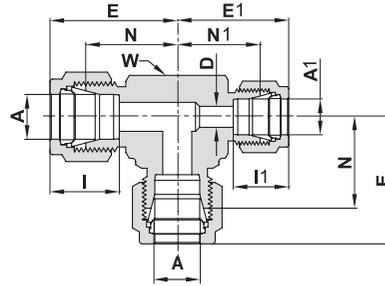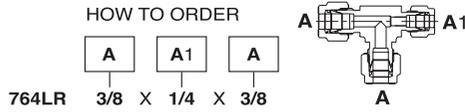



(ALL TUBE (INCH

Ordering Information	A Tube O.D.		A1 Tube O.D.		E		E1		I		I1		D		W Wrench Flat		N		N1	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
764LR_ 1/4 X 1/8 X 1/4	1/4	6.35	1/8	3.17	1.06	26.9	1.03	26.2	.60	15.2	.50	12.7	.09	2.28	1/2	12.7	.77	19.6	.77	19.6
764LR_ 3/8 X 1/4 X 3/8	3/8	9.25	1/4	6.35	1.20	30.5	1.14	29.0	.66	16.8	.60	15.2	.19	4.82	5/8	15.9	.91	23.1	.85	21.6
764LR_ 1/2 X 1/4 X 1/2	1/2	12.7	1/4	6.35	1.42	36.1	1.31	33.3	.90	22.9	.60	15.2	.19	4.82	13/16	20.6	1.02	25.9	1.02	25.9
764LR_ 1/2 X 3/8 X 1/2	1/2	12.7	3/8	9.52	1.42	36.1	1.31	33.3	.90	22.9	.66	16.8	.28	7.11	13/16	20.6	1.02	25.9	1.02	25.9
764LR_ 3/4 X 3/8 X 3/4	3/4	19.05	3/8	9.52	1.57	39.9	1.46	37.1	.96	24.4	.66	16.8	.28	7.11	1 1/16	27.0	1.17	29.7	1.17	29.7

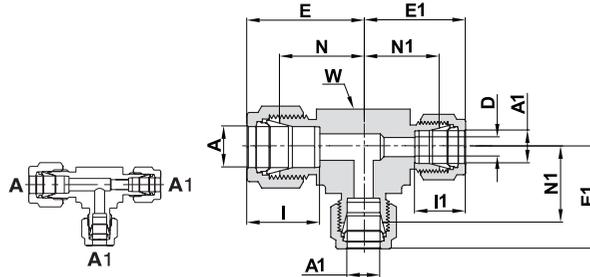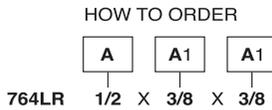

(ALL TUBE (INCH

Ordering Information	A Tube O.D.		A1 Tube O.D.		E		E1		I		I1		D		W Wrench Flat		N		N1	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
764LR_ 1/2 X 3/8 X 3/8	1/2	12.70	3/8	9.52	1.42	36.1	1.31	33.3	.90	22.9	.66	16.8	.28	7.1	13/16	20.6	1.02	25.9	1.02	25.9
764LR_ 5/8 X 3/8 X 3/8	5/8	15.87	3/8	9.52	1.53	38.9	1.42	36.1	.96	24.4	.66	16.8	.28	7.1	15/16	23.8	1.13	28.7	1.13	28.7
764LR_ 3/4 X 3/8 X 3/8	3/4	19.05	3/8	9.52	1.57	39.9	1.46	37.1	.96	24.4	.66	16.8	.28	7.1	1 1/16	27.0	1.17	29.7	1.17	29.7

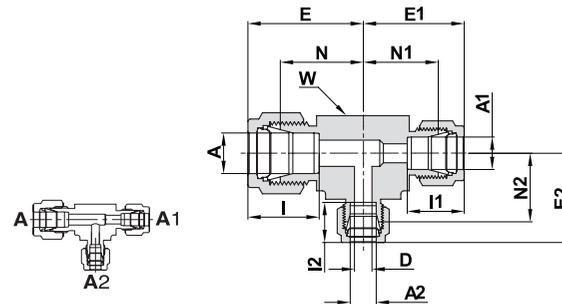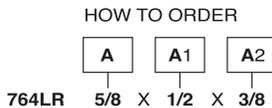


(ALL TUBE (INCH

Ordering Information	A Tube O.D.		A1 Tube O.D.		A2 Tube O.D.		E		E1		E2		I		I1		I2		D		W Wrench Flat		N		N1&N2	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
764LR_ 5/8 X 1/2 X 3/8	5/8	15.87	1/2	12.70	3/8	9.52	1.53	38.9	1.53	38.9	1.42	36.1	.96	24.4	.90	22.9	.66	16.8	.28	7.11	15/16	23.8	1.13	28.7	1.13	28.7
764LR_ 3/4 X 1/2 X 3/8	3/4	19.05	1/2	12.70	3/8	9.52	1.57	39.9	1.57	39.9	1.46	37.1	.96	24.4	.90	22.9	.66	16.8	.28	7.11	1 1/16	27.0	1.17	29.7	1.17	29.7
764LR_ 1 X 3/4 X 3/8	1	25.40	3/4	19.05	3/8	9.52	1.93	49.0	1.76	44.7	1.65	41.9	1.23	31.2	.96	24.4	.66	16.8	.28	7.11	1 3/8	34.9	1.45	36.8	1.36	34.5

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

765 L UNION ELBOW

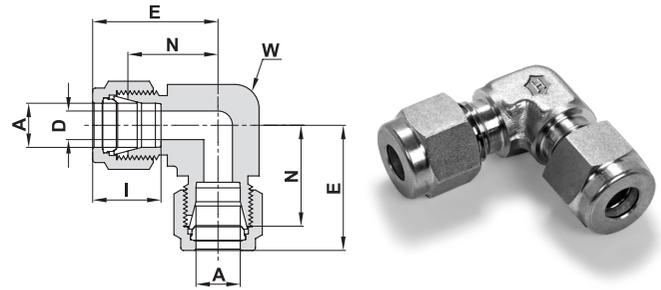

(TUBE (METRIC) TO TUBE (METRIC))

Ordering Information	A Tube O.D.		D		W Wrench Flat		N		E		I	
	mm	mm	mm	mm	inch	mm	mm	mm	mm	mm	mm	mm
765L_3	3		2.4		3/8	9.5		15.7		22.3		12.9
765L_4	4		2.4		1/2	12.7		18.8		25.4		13.7
765L_6	6		4.8		1/2	12.7		19.6		27.0		15.3
765L_8	8		6.4		9/16	14.3		21.3		28.8		16.2
765L_10	10		7.9		11/16	17.5		23.9		31.5		17.2
765L_12	12		9.5		13/16	20.6		25.9		36.0		22.8
765L_14	14		11.1		15/16	23.8		27.9		38.0		24.4
765L_15	15		11.9		15/16	23.8		27.9		38.0		24.4
765L_16	16		12.7		15/16	23.8		27.9		38.0		24.4
765L_18	18		15.1		1 1/16	27.0		29.7		39.8		24.4
765L_20	20		15.9		1 3/8	34.9		34.5		44.6		26.0
765L_22	22		18.3		1 3/8	34.9		34.5		44.6		26.0
765L_25	25		21.8		1 3/8	34.9		36.8		49.1		31.3
765L_38	38 ¹		33.7		-	55.0		56.4		84.0		49.4
765L_50	50 ¹		45.2		2 3/4	69.9		68.9		106.0		65.0


TUBE (INCH) TO TUBE (INCH)

Ordering Information	A Tube O.D.		D		W Wrench Flat		N		E		I	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
765L_1/16	1/16	1.58	.05	1.27	3/8	9.5	.55	14.00	.70	17.80	.34	.86
765L_1/8	1/8	3.17	.09	2.28	3/8	9.5	.62	15.74	.88	22.35	.50	12.7
765L_3/16	3/16	4.76	.12	3.04	1/2	12.7	.74	18.80	1.00	25.40	.54	13.7
765L_1/4	1/4	6.35	.19	4.82	1/2	12.7	.77	19.55	1.06	26.92	.60	15.2
765L_5/16	5/16	7.93	.25	6.35	9/16	14.3	.84	21.33	1.13	28.70	.64	16.2
765L_3/8	3/8	9.52	.28	7.11	5/8	15.9	.91	23.11	1.20	30.48	.66	16.8
765L_1/2	1/2	12.70	.41	10.41	13/16	20.6	1.02	25.90	1.42	36.06	.90	22.9
765L_5/8	5/8	15.87	.50	12.70	15/16	23.8	1.10	27.94	1.50	38.10	.96	24.4
765L_3/4	3/4	19.05	.62	15.74	1 1/16	27.0	1.17	29.70	1.57	39.90	.96	24.4
765L_7/8	7/8	22.22	.72	18.29	1 3/8	34.9	1.36	34.54	1.76	44.70	1.02	25.9
765L_1	1	25.40	.88	22.35	1 3/8	34.9	1.45	36.83	1.93	49.00	1.23	31.2
765L_1 1/4	1 1/4 ¹	31.75	1.09	27.70	1 11/16	42.9	1.75	44.50	2.62	66.55	1.62	41.2
765L_1 1/2	1 1/2 ¹	38.10	1.34	34.00	2	50.8	2.00	50.80	3.07	77.98	1.97	50.0
765L_2	2 ¹	50.80	1.81	45.97	2 3/4	69.9	2.75	69.85	4.22	107.19	2.66	67.6

¹Including low friction paste (see page 102)

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

765 LR
REDUCING UNION ELBOW

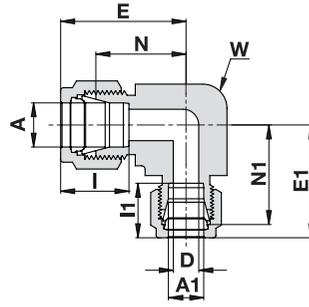

(TUBE (METRIC) TO TUBE (INCH))


Ordering Information	A Tube O.D.		A1 Tube O.D.		E		E1		I		I1		D		W Wrench Flat		N		N1	
	mm	inch	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	in	mm	mm	mm	mm	mm
765LR_6 X 1/4	6	1/4	27.0	26.9	15.3	15.2	4.8	1/2	12.7	19.6	19.6	4.8	9/16	14.3	21.3	21.3				
765LR_8 X 1/4	8	1/4	28.8	28.7	16.2	15.2	4.8	9/16	14.3	21.3	21.3	4.8	9/16	14.3	21.3	21.3				

(TUBE (INCH) TO TUBE (INCH))

Ordering Information	A Tube O.D.		A1 Tube O.D.		E		E1		I		I1		D		W Wrench Flat		N		N1	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
765LR_3/8 X 1/4	3/8	9.52	1/4	6.35	1.20	30.48	1.20	30.48	.66	16.8	.60	15.2	.19	4.82	5/8	15.9	.91	23.11	.91	23.11
765LR_5/8 X 3/8	5/8	15.87	3/8	9.52	1.50	38.10	1.39	35.31	.96	24.4	.66	16.8	.28	7.11	15/16	23.8	1.10	27.94	1.10	27.94

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

766 L
FEMALE CONNECTOR

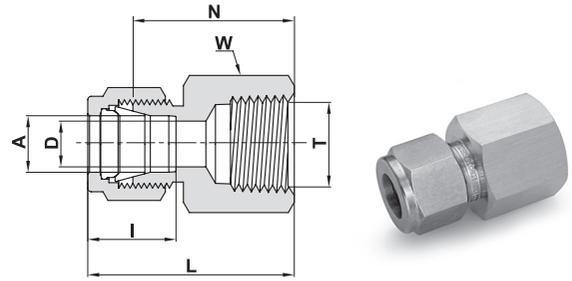


TUBE (METRIC) TO FEMALE NPT THREAD

Ordering Information	A	T	D	W	N	L	I
	Tube O.D.	(NPT)		Hex. Flat			
	mm	inch	mm	mm	mm	mm	mm
766L_3 X 1/8	3	1/8	2.4	14	22.1	28.7	12.9
766L_3 X 1/4	3	1/4	2.4	19	26.9	33.5	12.9
766L_4 X 1/8	4	1/8	2.4	14	23.1	29.7	13.7
766L_6 X 1/8	6	1/8	4.8	14	23.9	31.3	15.3
766L_6 X 1/4	6	1/4	4.8	19	28.4	35.8	15.3
766L_6 X 3/8	6	3/8	4.8	22	30.2	37.6	15.3
766L_6 X 1/2	6	1/2	4.8	27	35.1	42.5	15.3
766L_8 X 1/8	8	1/8	6.4	15	24.6	32.1	16.2
766L_8 X 1/4	8	1/4	6.4	19	29.5	37.0	16.2
766L_8 X 3/8	8	3/8	6.4	22	31.0	38.5	16.2
766L_8 X 1/2	8	1/2	6.4	27	35.8	43.3	16.2
766L_10 X 1/4	10	1/4	7.9	19	30.2	37.8	17.2
766L_10 X 3/8	10	3/8	7.9	22	31.8	39.4	17.2
766L_10 X 1/2	10	1/2	7.9	27	36.6	44.2	17.2
766L_12 X 1/4	12	1/4	9.5	22	30.2	40.3	22.8
766L_12 X 3/8	12	3/8	9.5	22	31.8	41.9	22.8
766L_12 X 1/2	12	1/2	9.5	27	36.6	46.7	22.8
766L_15 X 1/2	15	1/2	11.9	27	36.6	46.7	24.4
766L_16 X 1/2	16	1/2	12.7	27	36.8	46.9	24.4
766L_20 X 1/2	20	1/2	15.9	30	37.8	47.9	26.0
766L_20 X 3/4	20	3/4	15.9	35	39.6	49.7	26.0
766L_22 X 3/4	22	3/4	18.3	35	39.6	49.7	26.0
766L_22 X 1	22	1	18.3	41	47.8	57.9	26.0
766L_25 X 3/4	25	3/4	21.8	35	41.1	53.4	31.3
766L_25 X 1	25	1	21.8	41	50.0	62.3	31.3

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

Cont'd next page

766 L
FEMALE CONNECTOR
 (CONT'D)

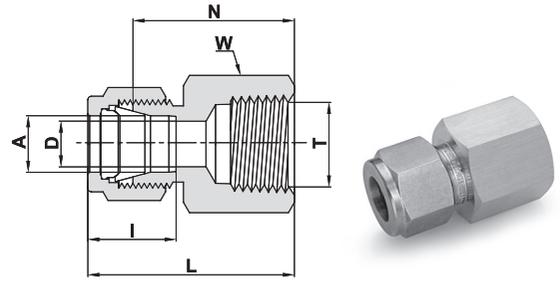


TUBE (INCH) TO FEMALE NPT THREAD

Ordering Information	A Tube O.D.		T (NPT)	D		W Hex Flat	N		L		I	
	inch	mm	inch	inch	mm	inch	inch	mm	inch	mm	inch	mm
766L_ 1/16 X1/16	1/16	1.58	1/16	.05	1.27	7/16	.78	19.81	.93	23.62	.34	8.6
766L_ 1/16 X 1/8	1/16	1.58	1/8	.05	1.27	9/16	.81	20.57	.96	24.38	.34	8.6
766L_ 1/8 X 1/8	1/8	3.17	1/8	.09	2.28	9/16	.87	22.10	1.13	28.70	.50	12.7
766L_ 1/8 X 1/4	1/8	3.17	1/4	.09	2.28	3/4	1.06	26.92	1.32	33.52	.50	12.7
766L_ 3/16 X 1/8	3/16	4.76	1/8	.12	3.04	9/16	.91	23.11	1.17	29.71	.54	13.7
766L_ 1/4 X 1/8	1/4	6.35	1/8	.19	4.82	9/16	.94	23.87	1.23	31.24	.60	15.2
766L_ 1/4 X 1/4	1/4	6.35	1/4	.19	4.82	3/4	1.12	28.44	1.41	35.81	.60	15.2
766L_ 1/4 X 3/8	1/4	6.35	3/8	.19	4.82	7/8	1.19	30.22	1.48	37.59	.60	15.2
766L_ 1/4 X 1/2	1/4	6.35	1/2	.19	4.82	1 1/16	1.38	35.00	1.67	42.42	.60	15.2
766L_ 5/16 X 1/8	5/16	7.93	1/8	.25	6.35	9/16	.97	24.63	1.26	32.00	.64	16.2
766L_ 5/16 X 1/4	5/16	7.93	1/4	.25	6.35	3/4	1.16	29.46	1.45	36.83	.64	16.2
766L_ 3/8 X 1/8	3/8	9.52	1/8	.28	7.11	5/8	1.00	25.40	1.29	32.76	.66	16.8
766L_ 3/8 X 1/4	3/8	9.52	1/4	.28	7.11	3/4	1.19	30.22	1.48	37.59	.66	16.8
766L_ 3/8 X 3/8	3/8	9.52	3/8	.28	7.11	7/8	1.25	31.75	1.54	39.11	.66	16.8
766L_ 3/8 X 1/2	3/8	9.52	1/2	.28	7.11	1 1/16	1.44	36.57	1.73	43.94	.66	16.8
766L_ 3/8 X 3/4	3/8	9.52	3/4	.28	7.11	1 5/16	1.59	40.40	1.88	47.75	.66	16.8
766L_ 1/2 X 1/4	1/2	12.70	1/4	.41	10.41	13/16	1.19	30.22	1.59	40.38	.90	22.9
766L_ 1/2 X 3/8	1/2	12.70	3/8	.41	10.41	7/8	1.25	31.75	1.65	41.91	.90	22.9
766L_ 1/2 X 1/2	1/2	12.70	1/2	.41	10.41	1 1/16	1.44	36.57	1.84	46.73	.90	22.9
766L_ 1/2 X 3/4	1/2	12.70	3/4	.41	10.41	1 5/16	1.50	38.10	1.90	48.26	.90	22.9
766L_ 5/8 X 3/8	5/8	15.87	3/8	.50	12.70	15/16	1.25	31.75	1.65	41.91	.96	24.4
766L_ 5/8 X 1/2	5/8	15.87	1/2	.50	12.70	1 1/16	1.44	36.57	1.84	46.73	.96	24.4
766L_ 5/8 X 3/4	5/8	15.87	3/4	.50	12.70	1 5/16	1.50	38.10	1.90	48.26	.96	24.4
766L_ 3/4 X 1/2	3/4	19.05	1/2	.62	15.75	1 1/16	1.44	36.57	1.84	46.73	.96	24.4
766L_ 3/4 X 3/4	3/4	19.05	3/4	.62	15.75	1 5/16	1.50	38.10	1.90	48.26	.96	24.4
766L_ 7/8 X 3/4	7/8	22.22	3/4	.72	18.28	1 5/16	1.56	39.62	1.96	49.78	1.02	25.9
766L_ 1 X 3/4	1	25.40	3/4	.88	22.35	1 3/8	1.62	41.14	2.10	53.34	1.23	31.2
766L_ 1 X 1	1	25.40	1	.88	22.35	1 5/8	1.97	50.03	2.45	62.23	1.23	31.2
766L_ 1 1/4 X 1 1/4	1 1/4 ¹	31.75	1 1/4	1.09	27.70	2 1/4	2.07	52.59	2.94	74.68	1.62	41.2
766L_ 1 1/2 X 1 1/2	1 1/2 ¹	38.10	1 1/2	1.34	34.00	2 3/8	2.21	56.13	3.28	83.31	1.97	50.0
766L_ 2 X 2	2 ¹	50.80	2	1.81	45.97	2 7/8	2.53	64.26	4.00	101.60	2.66	67.6

¹Including low friction paste (see page 102)

"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

766 LR FEMALE CONNECTOR

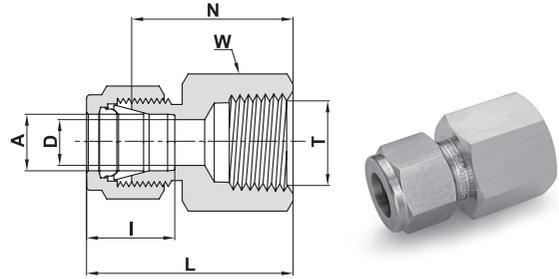

TUBE (METRIC) TO FEMALE ISO TAPERED THREAD

Ordering Information	A	T	D	W	N	L	I
	Tube O.D.	(ISO)		Hex. Flat			
	mm	inch	mm	mm	mm	mm	mm
766LR_3 X 1/8	3	R-1/8	2.4	14	22.1	28.7	12.9
766LR_6 X 1/8	6	R-1/8	4.8	14	23.9	31.3	15.3
766LR_6 X 1/4	6	R-1/4	4.8	19	28.4	35.8	15.3
766LR_6 X 3/8	6	R-3/8	4.8	22	30.2	37.6	15.3
766LR_6 X 1/2	6	R-1/2	4.8	27	35.1	42.5	15.3
766LR_8 X 1/8	8	R-1/8	6.4	15	24.6	32.1	16.2
766LR_8 X 1/4	8	R-1/4	6.4	19	29.5	37.0	16.2
766LR_8 X 3/8	8	R-3/8	6.4	22	31.0	38.5	16.2
766LR_8 X 1/2	8	R-1/2	6.4	27	35.8	43.3	16.2
766LR_10 X 1/8	10	R-1/8	7.9	18	25.4	33.0	17.2
766LR_10 X 1/4	10	R-1/4	7.9	19	30.2	37.8	17.2
766LR_10 X 3/8	10	R-3/8	7.9	22	31.8	39.4	17.2
766LR_10 X 1/2	10	R-1/2	7.9	27	36.6	44.2	17.2
766LR_12 X 1/8	12	R-1/8	8.3	22	25.4	35.5	22.8
766LR_12 X 1/4	12	R-1/4	9.5	22	30.2	40.3	22.8
766LR_12 X 3/8	12	R-3/8	9.5	22	31.8	41.9	22.8
766LR_12 X 1/2	12	R-1/2	9.5	27	36.6	46.7	22.8
766LR_12 X 3/4	12	R-3/4	9.5	35	38.9	49.0	22.8
766LR_15 X 3/8	15	R-3/8	11.9	24	31.8	41.9	24.4
766LR_15 X 1/2	15	R-1/2	11.9	27	36.6	46.7	24.4
766LR_20 X 1/2	20	R-1/2	15.9	30	37.8	47.9	26.0
766LR_20 X 3/4	20	R-3/4	15.9	35	39.6	49.7	26.0
766LR_22 X 3/4	22	R-3/4	18.3	35	39.6	49.7	26.0
766LR_22 X 1	22	R-1	18.3	41	47.8	57.9	26.0
766LR_25 X 3/4	25	R-3/4	21.8	35	41.1	53.4	31.3
766LR_25 X 1	25	R-1	21.8	41	50.0	62.3	31.3

Reference

Specifications:

DIN -2999

BS -21

JIS -B0203

ISO -7/1-BSP-T


Designation:

Marking LR on Hex

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

Cont'd next page

766 LR
FEMALE CONNECTOR
(CONT'D)

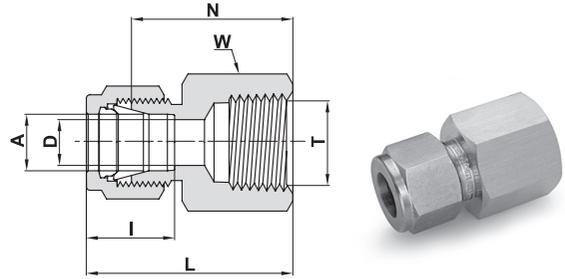

TUBE (INCH) TO FEMALE ISO TAPERED THREAD

Ordering Information	A Tube O.D.		T (ISO)	D		W Hex Flat	N		L		I	
	inch	mm		inch	mm		inch	mm	inch	mm	inch	mm
766LR_ 1/16 X1/16	1/16	1.58	R-1/16	.05	1.27	7/16	.78	19.81	.93	23.62	.34	8.6
766LR_ 1/16 X 1/8	1/16	1.58	R-1/8	.05	1.27	9/16	.81	20.57	.96	24.38	.34	8.6
766LR_ 1/8 X 1/8	1/8	3.17	R-1/8	.09	2.28	9/16	.87	22.10	1.13	28.70	.50	12.7
766LR_ 1/8 X 1/4	1/8	3.17	R-1/4	.09	2.28	3/4	1.06	26.92	1.32	33.52	.50	12.7
766LR_ 3/16 X 1/8	3/16	4.76	R-1/8	.12	3.04	9/16	.91	23.11	1.17	29.71	.54	13.7
766LR_ 1/4 X 1/8	1/4	6.35	R-1/8	.19	4.82	9/16	.94	23.87	1.23	31.24	.60	15.2
766LR_ 1/4 X 1/4	1/4	6.35	R-1/4	.19	4.82	3/4	1.12	28.44	1.41	35.81	.60	15.2
766LR_ 1/4 X 3/8	1/4	6.35	R-3/8	.19	4.82	7/8	1.19	30.22	1.48	37.59	.60	15.2
766LR_ 1/4 X 1/2	1/4	6.35	R-1/2	.19	4.82	1 1/16	1.38	35.00	1.67	42.42	.60	15.2
766LR_ 5/16 X 1/4	5/16	7.93	R-1/4	.25	6.35	3/4	1.16	29.46	1.45	36.83	.64	16.2
766LR_ 3/8 X 1/8	3/8	9.52	R-1/8	.28	7.11	5/8	1.00	25.40	1.29	32.76	.66	16.8
766LR_ 3/8 X 1/4	3/8	9.52	R-1/4	.28	7.11	3/4	1.19	30.22	1.48	37.59	.66	16.8
766LR_ 3/8 X 3/8	3/8	9.52	R-3/8	.28	7.11	7/8	1.25	31.75	1.54	39.11	.66	16.8
766LR_ 3/8 X 1/2	3/8	9.52	R-1/2	.28	7.11	1 1/16	1.44	36.57	1.73	43.94	.66	16.8
766LR_ 1/2 X 1/4	1/2	12.70	R-1/4	.41	10.41	13/16	1.19	30.20	1.59	40.38	.90	22.9
766LR_ 1/2 X 3/8	1/2	12.70	R-3/8	.41	10.41	7/8	1.25	31.75	1.65	41.91	.90	22.9
766LR_ 1/2 X 1/2	1/2	12.70	R-1/2	.41	10.41	1 1/16	1.44	36.57	1.84	46.73	.90	22.9
766LR_ 5/8 X 1/2	5/8	15.87	R-1/2	.50	12.70	1 1/16	1.44	36.57	1.84	46.73	.96	24.4
766LR_ 3/4 X 1/2	3/4	19.05	R-1/2	.62	15.75	1 1/16	1.44	36.57	1.84	46.73	.96	24.4
766LR_ 3/4 X 3/4	3/4	19.05	R-3/4	.62	15.75	1 5/16	1.50	38.10	1.90	48.26	.96	24.4
766LR_ 1 X 3/4	1	25.40	R-3/4	.88	22.35	1 3/8	1.62	41.14	2.10	53.34	1.23	31.2
766LR_ 1 X 1	1	25.40	R-1	.88	22.35	1 5/8	1.97	50.03	2.45	62.23	1.23	31.2

Reference

Specifications:


- DIN -2999
- BS -21
- JIS -B0203
- ISO -7/1-BSP-T

Designation:

Marking LR on Hex

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

766 LG FEMALE CONNECTOR

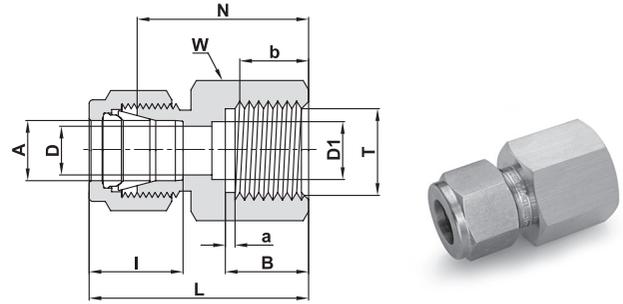

TUBE (METRIC) TO FEMALE ISO PARALLEL THREAD

Ordering Information	A Tube O.D.		T (ISO)	D	D1		W Hex. Flat	B		b Min	a Min	N	L		I
	mm	inch	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
766LG_3 X 1/4	3		G-1/4	2.4	5.5	19	13.0	9.5	1.6	28.7	35.3	12.9			
766LG_6 X 1/8	6		G-1/8	4.0	4.0	14	10.0	7.0	1.6	25.0	32.4	15.3			
766LG_6 X 1/4	6		G-1/4	4.8	5.5	19	13.0	9.5	1.6	30.2	37.6	15.3			
766LG_6 X 3/8	6		G-3/8	4.8	6.5	24	14.1	10.0	1.6	30.2	37.6	15.3			
766LG_6 X 1/2	6		G-1/2	4.8	7.0	27	19.0	15.0	1.6	36.1	43.5	15.3			
766LG_8 X 1/4	8		G-1/4	5.5	5.5	19	13.0	9.5	1.6	31.0	38.5	16.2			
766LG_8 X 3/8	8		G-3/8	6.4	6.4	24	14.1	10.0	1.6	28.7	36.2	16.2			
766LG_8 X 1/2	8		G-1/2	7.0	7.0	27	19.0	15.0	1.6	33.5	41.0	16.2			
766LG_10 X 1/4	10		G-1/4	5.5	5.5	19	13.0	9.5	1.6	31.8	39.4	17.2			
766LG_10 X 3/8	10		G-3/8	6.5	6.5	24	14.1	10.0	1.6	31.2	38.8	17.2			
766LG_10 X 1/2	10		G-1/2	7.0	7.0	27	19.0	15.0	1.6	34.5	42.1	17.2			
766LG_12 X 1/4	12		G-1/4	5.5	5.5	22	13.0	9.5	1.6	31.8	41.9	22.8			
766LG_12 X 3/8	12		G-3/8	6.5	6.5	24	14.1	10.0	1.6	34.3	44.4	22.8			
766LG_12 X 1/2	12		G-1/2	7.0	7.0	27	19.0	15.0	1.6	38.1	48.2	22.8			
766LG_20 X 1/2	20		G-1/2	7.0	7.0	30	19.0	15.0	1.6	44.2	54.3	26.0			
766LG_22 X 1/2	22		G-1/2	7.0	7.0	30	19.0	15.0	1.6	44.2	54.3	26.0			

TUBE (INCH) TO FEMALE ISO PARALLEL THREAD

Ordering Information	A Tube O.D.		T (ISO)	D		D1		W Hex. Flat	B		b Min	a Min	N		L		I			
	inch	mm	inch	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm		
766LG_1/8 X 1/4	1/8	3.17	G-1/4	.09	2.3	.22	5.5	3/4	.51	13.0	.37	9.5	.06	1.6	1.13	28.7	1.39	35.3	.50	12.7
766LG_1/4 X 1/8	1/4	6.35	G-1/8	.16	4.0	.16	4.0	9/16	.40	10.0	.28	7.0	.06	1.6	.98	25.0	1.27	32.4	.60	15.2
766LG_1/4 X 1/4	1/4	6.35	G-1/4	.19	4.8	.22	5.5	3/4	.51	13.0	.37	9.5	.06	1.6	1.19	30.2	1.48	37.6	.60	15.2
766LG_1/4 X 3/8	1/4	6.35	G-3/8	.19	4.8	.26	6.5	15/16	.56	14.1	.39	10.0	.06	1.6	1.19	30.2	1.48	37.6	.60	15.2
766LG_1/4 X 1/2	1/4	6.35	G-1/2	.19	4.8	.28	7.0	1 1/16	.74	19.0	.59	15.0	.06	1.6	1.42	36.1	1.71	43.4	.60	15.2
766LG_5/16 X 1/4	5/16	7.93	G-1/4	.22	5.5	.22	5.5	3/4	.51	13.0	.37	9.5	.06	1.6	1.22	31.0	1.51	38.4	.64	16.2
766LG_5/16 X 1/2	5/16	7.93	G-1/2	.28	7.0	.28	7.0	1 1/16	.74	19.0	.59	15.0	.06	1.6	1.32	33.5	1.61	40.9	.64	16.2
766LG_3/8 X 1/4	3/8	9.52	G-1/4	.22	5.5	.22	5.5	3/4	.51	13.0	.37	9.5	.06	1.6	1.25	31.8	1.54	39.1	.66	16.8
766LG_3/8 X 3/8	3/8	9.52	G-3/8	.26	6.6	.26	6.6	15/16	.56	14.1	.39	10.0	.06	1.6	1.23	31.2	1.52	38.6	.66	16.8
766LG_3/8 X 1/2	3/8	9.52	G-1/2	.28	7.0	.28	7.0	1 1/16	.74	19.0	.59	15.0	.06	1.6	1.36	34.5	1.65	41.9	.66	16.8
766LG_1/2 X 3/8	1/2	12.7	G-3/8	.26	6.5	.26	6.5	15/16	.56	14.1	.39	10.0	.06	1.6	1.35	34.3	1.75	44.5	.90	22.9
766LG_1/2 X 1/2	1/2	12.7	G-1/2	.28	7.0	.28	7.0	1 1/16	.74	19.0	.59	15.0	.06	1.6	1.50	38.1	1.90	48.2	.90	22.9

Reference

Specifications:

DIN -ISO 228/1
BS -2779
JIS -B0202
ISO -228/1-BSP-P


For Parallel Threads Sealing, see page 86.

Designation:

Marking LG on Hex

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

767 LT
REDUCER

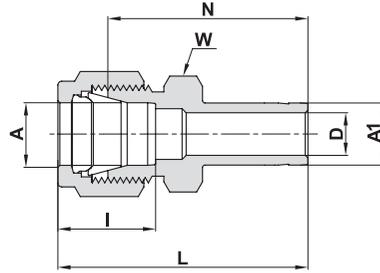


(TUBE (METRIC) TO STUB (METRIC))

Ordering Information	A	A1	D	W	N	L	I
	Tube O.D.	Tube O.D.	mm	Hex. Flat	mm	mm	mm
	mm	mm	mm	mm	mm	mm	mm
767LT _2 X 3	2	3	1.7	12	26.9	33.5	12.9
767LT _3 X 4	3	4	2.2	12	28.4	35.0	12.9
767LT _3 X 6	3	6	2.4	12	29.5	36.1	12.9
767LT _3 X 10	3	10	2.4	14	31.8	38.4	12.9
767LT _4 X 6	4	6	2.4	12	30.5	37.1	13.7
767LT _6 X 3	6	3	2.1	14	29.5	36.9	15.3
767LT _6 X 8	6	8	4.8	14	32.5	39.9	15.3
767LT _6 X 10	6	10	4.8	14	33.3	40.7	15.3
767LT _6 X 12	6	12	4.8	14	38.9	46.3	15.3
767LT _6 X 18	6	18	4.8	22	42.2	49.6	15.3
767LT _8 X 6	8	6	4.0	15	32.8	40.3	16.2
767LT _8 X 10	8	10	6.4	15	34.5	42.0	16.2
767LT _8 X 12	8	12	6.4	15	40.1	47.6	16.2
767LT _10 X 6	10	6	4.0	18	34.8	42.4	17.2
767LT _10 X 8	10	8	5.6	18	35.8	43.4	17.2
767LT _10 X 12	10	12	7.9	18	42.2	49.8	17.2
767LT _10 X 15	10	15	7.9	18	43.7	51.3	17.2
767LT _10 X 18	10	18	7.9	22	43.7	51.3	17.2
767LT _12 X 6	12	6	4.0	22	34.8	44.9	22.8
767LT _12 X 8	12	8	5.6	22	35.8	45.9	22.8
767LT _12 X 10	12	10	7.1	22	36.6	46.7	22.8
767LT _12 X 16	12	16	9.5	22	43.7	53.8	22.8
767LT _12 X 18	12	18	9.5	22	43.7	53.8	22.8
767LT _12 X 20	12	20	9.5	22	46.0	56.1	22.8
767LT _12 X 22	12	22	9.5	24	46.0	56.1	22.8
767LT _12 X 25	12	25	9.5	27	52.3	62.4	22.8
767LT _16 X 12	16	12	8.8	24	42.9	53.0	24.4
767LT _18 X 12	18	12	8.8	27	44.5	54.6	24.4
767LT _18 X 16	18	16	12.7	27	46.0	56.1	24.4
767LT _18 X 20	18	20	15.1	27	47.5	57.6	24.4
767LT _18 X 22	18	22	15.1	27	47.5	57.6	24.4
767LT _18 X 25	18	25	15.1	27	52.3	62.4	24.4
767LT _20 X 16	20	16	12.7	30	47.8	57.9	26.0
767LT _20 X 18	20	18	13.9	30	47.8	57.9	26.0
767LT _20 X 22	20	22	15.9	30	49.3	59.4	26.0
767LT _20 X 25	20	25	15.9	30	54.1	64.2	26.0
767LT _22 X 18	22	18	13.9	30	47.8	57.9	26.0
767LT _22 X 20	22	20	15.1	30	49.3	59.4	26.0
767LT _22 X 25	22	25	18.3	30	54.1	64.2	26.0
767LT _25 X 18	25	18	13.9	35	50.8	63.1	31.3
767LT _25 X 20	25	20	15.1	35	52.3	64.6	31.3

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

Cont'd next page

767 LT
REDUCER
 (CONT'D)

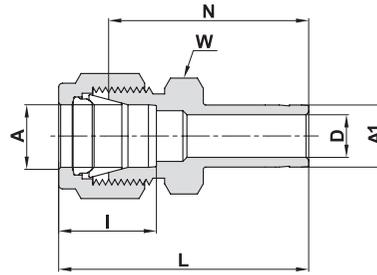


Tube O.D.

(TUBE (METRIC) TO STUB (INCH))


Ordering Information	A Tube O.D.	A1 Tube O.D.	D	W Hex. Flat	N	L	I
	mm	inch	mm	mm	mm	mm	mm
767LT _ 2 X 1/8	2	1/8	2.0	12	26.9	33.5	12.9
767LT _ 3 X 1/8	3	1/8	2.0	12	26.9	33.5	12.9
767LT _ 3 X 1/4	3	1/4	2.4	12	29.5	36.1	12.9
767LT _ 4 X 1/4	4	1/4	2.4	12	30.5	37.1	13.7
767LT _ 6 X 1/8	6	1/8	2.2	14	29.5	36.9	15.3
767LT _ 6 X 5/16	6	5/16	4.8	14	32.5	39.9	15.3
767LT _ 6 X 3/8	6	3/8	4.8	14	33.3	40.7	15.3
767LT _ 6 X 1/2	6	1/2	4.8	14	38.9	46.3	15.3
767LT _ 8 X 3/8	8	3/8	6.4	15	34.5	42.0	16.2
767LT _ 8 X 1/2	8	1/2	6.4	15	40.1	47.6	16.2
767LT _ 10 X 3/8	10	3/8	6.8	18	36.6	44.2	17.2
767LT _ 10 X 1/2	10	1/2	7.9	18	42.2	49.8	17.2
767LT _ 12 X 1/2	12	1/2	9.4	22	42.2	52.3	22.8
767LT _ 12 X 3/4	12	3/4	9.4	22	43.7	53.8	22.8
767LT _ 18 X 3/4	18	3/4	15.0	27	46.0	56.1	24.4
767LT _ 18 X 1	18	1	15.1	27	52.3	62.4	24.4
767LT _ 25 X 1	25	1	20.3	35	57.2	69.5	31.3

HEAT EXCHANGER TEE INFORMATION


UNION TEE - 764 L

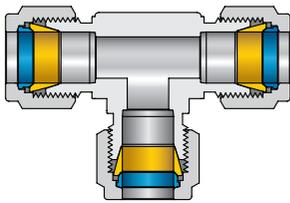

REDUCER - 767 LT




Heat exchanger tee made with Let-Lok tube fittings

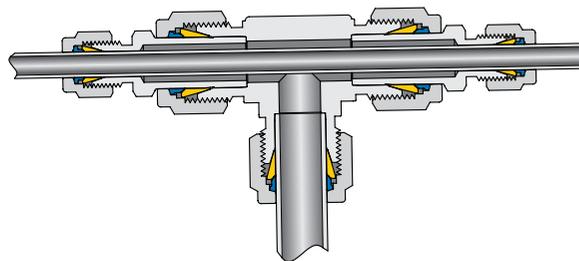

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

767 LT
REDUCER
(CONT'D)

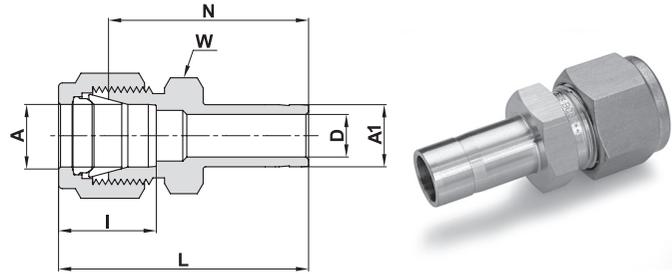


(TUBE (INCH) TO STUB (INCH))

Ordering Information	A Tube O.D.		A1 Tube O.D.		D		W Hex Flat	N		L		I	
	inch	mm	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm
767LT _ 1/16 X 1/8	1/16	1.58	1/8	3.17	.05	1.27	5/16	1.00	25.40	1.15	29.21	.34	8.6
767LT _ 1/16 X 1/4	1/16	1.58	1/4	6.35	.05	1.27	5/16	1.09	27.68	1.24	31.50	.34	8.6
767LT _ 1/8 X 1/16	1/8	3.17	1/16	1.58	.03	.76	7/16	.88	22.35	1.14	28.96	.50	12.7
767LT _ 1/8 X 1/8	1/8	3.17	1/8	3.17	.08	2.03	7/16	1.06	26.92	1.32	33.52	.50	12.7
767LT _ 1/8 X 3/16	1/8	3.17	3/16	4.76	.09	2.28	7/16	1.09	27.68	1.35	34.29	.50	12.7
767LT _ 1/8 X 1/4	1/8	3.17	1/4	6.35	.09	2.28	7/16	1.16	29.46	1.42	36.06	.50	12.7
767LT _ 1/8 X 3/8	1/8	3.17	3/8	9.52	.09	2.28	7/16	1.22	30.98	1.48	37.59	.50	12.7
767LT _ 1/8 X 1/2	1/8	3.17	1/2	12.70	.09	2.28	9/16	1.48	37.59	1.74	44.20	.50	12.7
767LT _ 3/16 X 1/8	3/16	4.76	1/8	3.17	.08	2.03	7/16	1.11	28.19	1.37	34.80	.54	13.7
767LT _ 3/16 X 1/4	3/16	4.76	1/4	6.35	.12	3.04	7/16	1.20	30.48	1.46	37.08	.54	13.7
767LT _ 1/4 X 1/8	1/4	6.35	1/8	3.17	.08	2.03	1/2	1.16	29.46	1.45	36.83	.60	15.2
767LT _ 1/4 X 3/16	1/4	6.35	3/16	4.76	.12	3.04	1/2	1.19	30.22	1.48	37.59	.60	15.2
767LT _ 1/4 X 1/4	1/4	6.35	1/4	6.35	.17	4.20	1/2	1.25	31.75	1.54	39.11	.60	15.2
767LT _ 1/4 X 5/16	1/4	6.35	5/16	7.93	.19	4.82	1/2	1.28	32.51	1.57	39.87	.60	15.2
767LT _ 1/4 X 3/8	1/4	6.35	3/8	9.52	.19	4.82	1/2	1.31	33.27	1.60	40.64	.60	15.2
767LT _ 1/4 X 1/2	1/4	6.35	1/2	12.70	.19	4.82	9/16	1.53	38.86	1.82	46.22	.60	15.2
767LT _ 1/4 X 5/8	1/4	6.35	5/8	15.87	.19	4.82	11/16	1.60	40.64	1.89	48.00	.60	15.2
767LT _ 1/4 X 3/4	1/4	6.35	3/4	19.05	.19	4.82	13/16	1.59	40.39	1.88	47.75	.60	15.2
767LT _ 5/16 X 3/8	5/16	7.93	3/8	9.52	.25	6.35	9/16	1.36	34.54	1.65	41.91	.64	16.2
767LT _ 5/16 X 1/2	5/16	7.93	1/2	12.70	.25	6.35	9/16	1.58	40.13	1.87	47.49	.64	16.2
767LT _ 3/8 X 1/4	3/8	9.52	1/4	6.35	.17	4.20	5/8	1.34	34.03	1.63	41.40	.66	16.8
767LT _ 3/8 X 3/8	3/8	9.52	3/8	9.52	.27	6.85	5/8	1.41	35.81	1.70	43.18	.66	16.8
767LT _ 3/8 X 1/2	3/8	9.52	1/2	12.70	.28	7.11	5/8	1.62	41.14	1.91	48.51	.66	16.8
767LT _ 3/8 X 5/8	3/8	9.52	5/8	15.87	.28	7.11	11/16	1.69	42.92	1.98	50.29	.66	16.8
767LT _ 3/8 X 3/4	3/8	9.52	3/4	19.05	.28	7.11	13/16	1.69	42.92	1.98	50.29	.66	16.8
767LT _ 1/2 X 1/4	1/2	12.70	1/4	6.35	.17	4.20	13/16	1.37	34.80	1.77	44.96	.90	22.9
767LT _ 1/2 X 3/8	1/2	12.70	3/8	9.52	.27	6.85	13/16	1.44	36.58	1.84	46.74	.90	22.9
767LT _ 1/2 X 1/2	1/2	12.70	1/2	12.70	.37	9.40	13/16	1.66	42.16	2.06	52.32	.90	22.9
767LT _ 1/2 X 5/8	1/2	12.70	5/8	15.87	.41	10.41	13/16	1.72	43.68	2.12	53.84	.90	22.9
767LT _ 1/2 X 3/4	1/2	12.70	3/4	19.05	.41	10.41	13/16	1.72	43.68	2.12	53.84	.90	22.9
767LT _ 1/2 X 1	1/2	12.70	1	25.40	.41	10.41	1 1/16	1.97	50.03	2.37	60.19	.90	22.9
767LT _ 5/8 X 3/4	5/8	15.87	3/4	19.05	.50	12.70	15/16	1.75	44.45	2.15	54.61	.96	24.4
767LT _ 5/8 X 7/8	5/8	15.87	7/8	22.22	.50	12.70	15/16	1.81	45.97	2.21	56.13	.96	24.4
767LT _ 5/8 X 1	5/8	15.87	1	25.40	.50	12.70	1 1/16	2.00	50.80	2.40	60.96	.96	24.4
767LT _ 3/4 X 1/2	3/4	19.05	1/2	12.70	.37	9.40	1 1/16	1.75	44.45	2.15	54.61	.96	24.4
767LT _ 3/4 X 1	3/4	19.05	1	25.40	.62	15.75	1 1/16	2.06	52.32	2.46	62.48	.96	24.4
767LT _ 1 X 1 1/4	1	25.40	1 1/4 ¹	31.75	.88	22.35	1 3/8	2.69	68.33	3.17	80.52	1.23	31.2
767LT _ 1 X 1 1/2	1	25.40	1 1/2 ¹	38.10	.88	22.35	1 5/8	3.03	76.96	3.51	89.15	1.23	31.2
767LT _ 1 1/4 X 1 1/2	1 1/4	31.75	1 1/2 ¹	38.10	1.09	27.7	1 3/4	3.23	82.00	4.10	104.1	1.62	41.2


ASSEMBLY INSTRUCTIONS: Reducer tube to stub 767 LT

¹Supplied assembled on tube stub end (A1) nut+front & back ferrule. Tighten the nut on the body 1/2 a turn with a wrench. Low friction paste (see page 102).

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

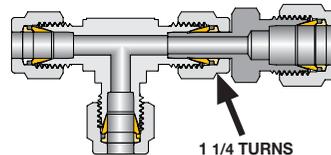


767 LT
REDUCER
 (CONT'D)

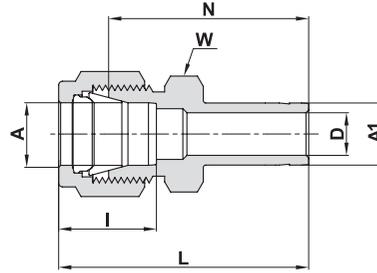

(TUBE (INCH) TO STUB (METRIC))

Ordering Information	A Tube O.D.		A1 Tube O.D.	D		W Hex. Flat	N		L		I	
	inch	mm	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm
767LT _ 1/8 X 6	1/8	3.17	6	.09	2.30	7/16	1.16	29.46	1.42	36.06	.50	12.7
767LT _ 1/4 X 6	1/4	6.35	6	.16	4.00	1/2	1.25	31.75	1.54	39.11	.60	15.2
767LT _ 3/8 X 8	3/8	9.52	8	.22	5.60	5/8	1.42	36.06	1.71	43.43	.66	16.8
767LT _ 3/8 X 12	3/8	9.52	12	.28	7.11	5/8	1.62	41.15	1.91	48.51	.66	16.8

767 LP
PORT CONNECTOR

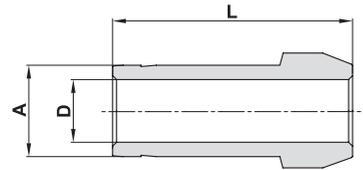

(CONNECTS TWO LET-LOK PORTS (METRIC))


Ordering Information	A Tube O.D.	D	L
	mm	mm	mm
767LP _ 3	3	2.1	22.2
767LP _ 6	6	4.0	25.0
767LP _ 8	8	5.6	25.9
767LP _ 10	10	7.1	27.1
767LP _ 12	12	8.8	36.2
767LP _ 16	16	12.7	37.4
767LP _ 18	18	13.9	37.4
767LP _ 38	38 ¹	31.6	81.9
767LP _ 50	50 ¹	42.8	114.0

(CONNECTS TWO LET-LOK PORTS (INCH))

Ordering Information	A Tube O.D.		D		L	
	inch	mm	inch	mm	inch	mm
767LP _ 1/16	1/16	1.58	.03	0.75	.54	13.7
767LP _ 1/8	1/8	3.17	.08	2.03	.88	22.4
767LP _ 1/4	1/4	6.35	.17	4.20	.98	24.9
767LP _ 5/16	5/16	7.93	.24	6.00	1.02	25.9
767LP _ 3/8	3/8	9.52	.27	6.85	1.03	26.2
767LP _ 1/2	1/2	12.70	.37	9.40	1.41	35.8
767LP _ 3/4	3/4	19.05	.59	15.00	1.47	37.3
767LP _ 1	1	25.40	.80	20.30	1.90	48.1
767LP _ 1 1/4	1 1/4 ¹	31.75	1.02	26.00	2.72	69.1
767LP _ 1 1/2	1 1/2 ¹	38.10	1.25	31.60	3.31	84.1
767LP _ 2	2 ¹	50.80	1.72	43.67	4.56	115.8

Assembly Instructions for 767LP - See next page

767 LM REDUCING PORT CONNECTOR

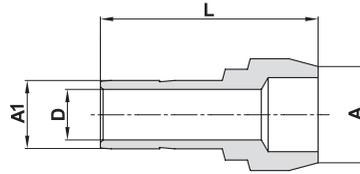

(CONNECTS TWO LET-LOK® PORTS (METRIC))

Ordering Information	A Tube O.D.		A1 Tube O.D.		D		L	
	mm	mm	mm	mm	mm	mm	mm	
767LM_ 6 X 3	6	3	2.1	22.9				
767LM_ 8 X 6	8	6	4.0	24.7				
767LM_ 10 X 6	10	6	4.0	25.8				
767LM_ 10 X 8	10	8	5.6	26.1				
767LM_ 12 X 6	12	6	4.0	29.1				
767LM_ 12 X 8	12	8	5.6	29.8				
767LM_ 12 X 10	12	10	7.1	30.6				
767LM_ 16 X 12	16	12	8.8	37.5				
767LM_ 38 X 25	38 ¹	25	19.8	65.8				


(CONNECTS TWO LET-LOK® PORTS (INCH))

Ordering Information	A Tube O.D.		A1 Tube O.D.		D		L	
	inch	mm	inch	mm	inch	mm	inch	mm
767LM_ 1/8 X 1/16	1/8	3.17	1/16	1.58	.03	0.75	.68	17.3
767LM_ 1/4 X 1/16	1/4	6.35	1/16	1.58	.03	0.75	.71	18.0
767LM_ 1/4 X 1/8	1/4	6.35	1/8	3.17	.08	2.03	.89	22.6
767LM_ 3/8 X 1/8	3/8	9.52	1/8	3.17	.08	2.03	.91	23.2
767LM_ 3/8 X 1/4	3/8	9.52	1/4	6.35	.17	4.20	.98	24.9
767LM_ 1/2 X 1/4	1/2	12.70	1/4	6.35	.17	4.20	1.15	29.2
767LM_ 1/2 X 3/8	1/2	12.70	3/8	9.52	.28	7.10	1.20	30.5
767LM_ 3/4 X 1/2	3/4	19.05	1/2	12.70	.39	9.90	1.49	37.9

ASSEMBLY INSTRUCTIONS FOR:

Reducer Port Connector 767


1/4 turn of the nut is required for all sizes.

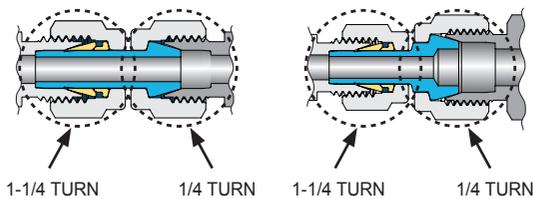

¹ Supplied assembled with Nuts and Ferrules. Low friction paste (see page 102).

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

768 L MALE CONNECTOR

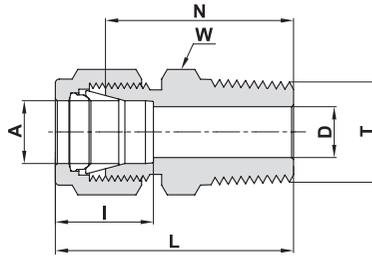


TUBE (METRIC) MALE NPT THREAD

Ordering Information	A	T	D	W	N	L	I
	Tube O.D.	(NPT)		Hex. Flat			
	mm	inch	mm	mm	mm	mm	mm
768L_2 X 1/8	2	1/8	1.7	12	23.9	30.5	12.9
768L_3 X 1/8	3	1/8	2.4	12	23.9	30.5	12.9
768L_3 X 1/4	3	1/4	2.4	14	29.0	35.6	12.9
768L_4 X 1/8	4	1/8	2.4	12	24.6	31.2	13.7
768L_4 X 1/4	4	1/4	2.4	14	29.7	36.3	13.7
768L_6 X 1/8	6	1/8	4.8	14	25.4	32.8	15.3
768L_6 X 1/4	6	1/4	4.8	14	30.5	37.9	15.3
768L_6 X 3/8	6	3/8	4.8	18	31.0	38.4	15.3
768L_6 X 1/2	6	1/2	4.8	22	37.3	44.7	15.3
768L_8 X 1/8	8	1/8	4.8	15	26.7	34.2	16.2
768L_8 X 1/4	8	1/4	6.4	15	31.2	38.7	16.2
768L_8 X 3/8	8	3/8	6.4	18	31.8	39.3	16.2
768L_8 X 1/2	8	1/2	6.4	22	38.1	45.6	16.2
768L_10 X 1/8	10	1/8	4.8	18	28.7	36.3	17.2
768L_10 X 1/4	10	1/4	7.9	18	33.3	40.9	17.2
768L_10 X 3/8	10	3/8	7.9	18	33.3	40.9	17.2
768L_10 X 1/2	10	1/2	7.9	22	38.9	46.5	17.2
768L_10 X 3/4	10	3/4	7.9	27	40.4	48.0	17.2
768L_12 X 1/8	12	1/8	4.8	22	28.7	38.8	22.8
768L_12 X 1/4	12	1/4	7.1	22	33.3	43.4	22.8
768L_12 X 3/8	12	3/8	9.5	22	33.3	43.4	22.8
768L_12 X 1/2	12	1/2	9.5	22	38.9	49.0	22.8
768L_12 X 3/4	12	3/4	9.5	27	40.4	50.5	22.8
768L_14 X 1/4	14	1/4	7.1	24	34.0	44.1	24.4
768L_14 X 3/8	14	3/8	9.5	24	34.0	44.1	24.4
768L_14 X 1/2	14	1/2	11.1	24	38.9	49.0	24.4
768L_15 X 1/2	15	1/2	11.9	24	38.9	49.0	24.4
768L_16 X 3/8	16	3/8	9.5	24	34.0	44.1	24.4
768L_16 X 1/2	16	1/2	11.9	24	38.9	49.0	24.4
768L_16 X 3/4	16	3/4	12.7	27	40.4	50.5	24.4
768L_18 X 1/2	18	1/2	11.9	27	40.4	50.5	24.4
768L_18 X 3/4	18	3/4	15.1	27	40.4	50.5	24.4
768L_20 X 1/2	20	1/2	11.9	30	42.2	52.3	26.0
768L_20 X 3/4	20	3/4	15.9	30	42.2	52.3	26.0
768L_22 X 3/4	22	3/4	15.9	30	42.2	52.3	26.0
768L_22 X 1	22	1	18.3	35	47.0	57.1	26.0
768L_25 X 1/2	25	1/2	11.9	35	45.2	57.5	31.3
768L_25 X 3/4	25	3/4	15.9	35	45.2	57.5	31.3
768L_25 X 1	25	1	21.8	35	50.0	62.3	31.3
768L_30 X 1 1/4	30 ¹	1 1/4	26.2	46	55.6	77.2	39.6
768L_32 X 1 1/4	32 ¹	1 1/4	28.6	46	56.6	79.6	42
768L_38 X 1 1/2	38 ¹	1 1/2	33.7	55	64.0	91.6	49.4
768L_50 X 2"	50 ¹	2	45.2	3 inch	76.2	113.3	65.0

¹Supplied assembled with nuts and ferrules. For low friction paste (see page 102)

Cont'd next page

768 L
MALE CONNECTOR
(CONT'D)

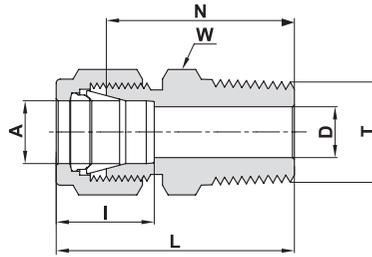

TUBE (INCH) MALE NPT THREAD


Ordering Information	A Tube O.D.		T (NPT)	D		W Hex. Flat	N		L		I	
	inch	mm		inch	mm		inch	mm	inch	mm	inch	mm
768L_ 1/16 X 1/16	1/16	1.58	1/16	.05	1.27	5/16	.79	20.10	.94	23.88	.34	8.6
768L_ 1/16 X 1/8	1/16	1.58	1/8	.05	1.27	7/16	.88	22.35	1.03	26.10	.34	8.6
768L_ 1/16 X 1/4	1/16	1.58	1/4	.05	1.27	9/16	1.07	27.17	1.22	30.98	.34	8.6
768L_ 1/8 X 1/16	1/8	3.17	1/16	.09	2.28	7/16	.91	23.11	1.17	29.71	.50	12.7
768L_ 1/8 X 1/8	1/8	3.17	1/8	.09	2.28	7/16	.94	23.90	1.20	30.48	.50	12.7
768L_ 1/8 X 1/4	1/8	3.17	1/4	.09	2.28	9/16	1.14	28.95	1.40	35.56	.50	12.7
768L_ 1/8 X 3/8	1/8	3.17	3/8	.09	2.28	11/16	1.15	29.21	1.41	35.81	.50	12.7
768L_ 1/8 X 1/2	1/8	3.17	1/2	.09	2.28	7/8	1.40	35.56	1.66	42.16	.50	12.7
768L_ 3/16 X 1/8	3/16	4.76	1/8	.12	3.04	7/16	.97	24.63	1.23	31.24	.54	13.7
768L_ 3/16 X 1/4	3/16	4.76	1/4	.12	3.04	9/16	1.17	29.72	1.43	36.32	.54	13.7
768L_ 1/4 X 1/16	1/4	6.35	1/16	.12	3.04	1/2	1.00	25.40	1.29	32.76	.60	15.2
768L_ 1/4 X 1/8	1/4	6.35	1/8	.19	4.82	1/2	1.00	25.40	1.29	32.76	.60	15.2
768L_ 1/4 X 1/4	1/4	6.35	1/4	.19	4.82	9/16	1.20	30.50	1.49	37.85	.60	15.2
768L_ 1/4 X 3/8	1/4	6.35	3/8	.19	4.82	11/16	1.22	30.98	1.51	38.35	.60	15.2
768L_ 1/4 X 1/2	1/4	6.35	1/2	.19	4.82	7/8	1.47	37.34	1.76	44.70	.60	15.2
768L_ 1/4 X 3/4	1/4	6.35	3/4	.19	4.82	1 1/16	1.53	38.86	1.82	46.22	.60	15.2
768L_ 5/16 X 1/8	5/16	7.93	1/8	.19	4.82	9/16	1.05	26.67	1.34	34.03	.64	16.2
768L_ 5/16 X 1/4	5/16	7.93	1/4	.25	6.35	9/16	1.23	31.24	1.52	38.60	.64	16.2
768L_ 5/16 X 3/8	5/16	7.93	3/8	.25	6.35	11/16	1.25	31.75	1.54	39.11	.64	16.2
768L_ 3/8 X 1/8	3/8	9.52	1/8	.19	4.82	5/8	1.10	27.90	1.39	35.30	.66	16.8
768L_ 3/8 X 1/4	3/8	9.52	1/4	.28	7.11	5/8	1.28	32.51	1.57	39.87	.66	16.8
768L_ 3/8 X 3/8	3/8	9.52	3/8	.28	7.11	11/16	1.28	32.51	1.57	39.87	.66	16.8
768L_ 3/8 X 1/2	3/8	9.52	1/2	.28	7.11	7/8	1.53	38.90	1.82	46.23	.66	16.8
768L_ 3/8 X 3/4	3/8	9.52	3/4	.28	7.11	1 1/16	1.59	40.38	1.88	47.75	.66	16.8
768L_ 3/8 X 1	3/8	9.52	1	.28	7.11	1 3/8	1.85	46.99	2.14	54.35	.66	16.8
768L_ 1/2 X 1/8	1/2	12.70	1/8	.19	4.82	13/16	1.13	28.70	1.53	38.86	.90	22.9
768L_ 1/2 X 1/4	1/2	12.70	1/4	.28	7.11	13/16	1.31	33.27	1.71	43.43	.90	22.9
768L_ 1/2 X 3/8	1/2	12.70	3/8	.38	9.65	13/16	1.31	33.27	1.71	43.43	.90	22.9
768L_ 1/2 X 1/2	1/2	12.70	1/2	.41	10.41	7/8	1.53	38.90	1.93	49.02	.90	22.9
768L_ 1/2 X 3/4	1/2	12.70	3/4	.41	10.41	1 1/16	1.59	40.38	1.99	50.54	.90	22.9
768L_ 1/2 X 1	1/2	12.70	1	.41	10.41	1 3/8	1.85	47.00	2.25	57.15	.90	22.9

Reference Specifications:

- 60° Thread angle
- Pitch measured in inches
- Truncation of root and crest is flat
- Taper angle 1° 47'

American Standard Pipe Thread (NPT).
 NPT (National Pipe Tapered) is made according to the specifications outlined in ANSI B1.20.1.


Thermoelement (see Page 36)



"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

Cont'd next page

768 L
MALE CONNECTOR
(CONT'D)

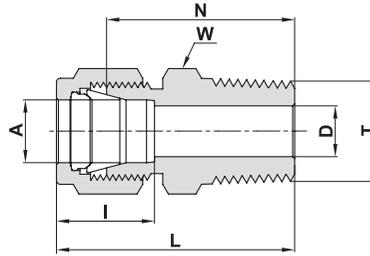

TUBE (INCH) MALE NPT THREAD



Ordering Information	A Tube O.D.		T (NPT)	D		W Hex. Flat	N		L		I	
	inch	mm	inch	inch	mm	inch	inch	mm	inch	mm	inch	mm
768L_ 5/8 X 1/4	5/8	15.87	1/4	.28	7.11	15/16	1.34	34.03	1.74	44.19	.96	24.4
768L_ 5/8 X 3/8	5/8	15.87	3/8	.38	9.65	15/16	1.34	34.03	1.74	44.19	.96	24.4
768L_ 5/8 X 1/2	5/8	15.87	1/2	.47	11.90	15/16	1.53	38.86	1.93	49.02	.96	24.4
768L_ 5/8 X 3/4	5/8	15.87	3/4	.50	12.70	1 1/16	1.59	40.38	1.99	50.54	.96	24.4
768L_ 3/4 X 3/8	3/4	19.05	3/8	.38	9.50	1 1/16	1.38	35.05	1.78	45.21	.96	24.4
768L_ 3/4 X 1/2	3/4	19.05	1/2	.47	11.90	1 1/16	1.59	40.38	1.99	50.54	.96	24.4
768L_ 3/4 X 3/4	3/4	19.05	3/4	.62	15.75	1 1/16	1.59	40.38	1.99	50.54	.96	24.4
768L_ 3/4 X 1	3/4	19.05	1	.62	15.75	1 3/8	1.85	47.00	2.25	57.15	.96	24.4
768L_ 7/8 X 1/2	7/8	22.22	1/2	.47	11.90	1 3/16	1.59	40.38	1.99	50.54	1.02	25.9
768L_ 7/8 X 3/4	7/8	22.22	3/4	.62	15.75	1 3/16	1.59	40.38	1.99	50.54	1.02	25.9
768L_ 7/8 X 1	7/8	22.22	1	.72	18.28	1 3/8	1.85	46.99	2.25	57.15	1.02	25.9
768L_ 1 X 1/2	1	25.40	1/2	.47	11.90	1 3/8	1.78	45.21	2.26	57.40	1.23	31.2
768L_ 1 X 3/4	1	25.40	3/4	.62	15.75	1 3/8	1.78	45.21	2.26	57.40	1.23	31.2
768L_ 1 X 1	1	25.40	1	.88	22.35	1 3/8	1.97	50.03	2.45	62.23	1.23	31.2
768L_ 1 1/4 X 1	1 1/4 ¹	31.75	1	.86	21.80	1 3/4	2.17	55.12	3.04	77.22	1.62	41.2
768L_ 1 1/4 X 1 1/4	1 1/4 ¹	31.75	1 1/4	1.09	27.70	1 3/4	2.17	55.12	3.04	77.22	1.62	41.2
768L_ 1 1/2 X 1 1/2	1 1/2 ¹	38.10	1 1/2	1.34	34.00	2 1/8	2.43	61.72	3.50	88.90	1.97	50.0
768L_ 2 X 2	2 ¹	50.80	2	1.81	45.97	2 3/4	3.00	76.20	4.47	113.54	2.66	67.6

¹ Including low friction paste (see page 102)

Reference Specifications:

- 60° thread angle
- Pitch measured in inches
- Truncation of root and crest is flat
- Taper angle 1° 47'

American Standard Pipe Thread (NPT).
 NPT (National Pipe Tapered) is made according to the specifications outlined in ASNI B1.20.1.



Thermoelement


For ordering: use the catalog number of the selected fitting and add the suffix TC.
 Example: 768L SS 1/4 x 1/4 TC

TERMOCOUPLE LET-LOK TUBE FITTINGS

Tubing O.D.	Pressure rating factor
2 mm to 12 mm, 1/8" to 1/2"	0.75 x pressure rating shown in table 1 (see page 9)
14 mm to 18 mm, 5/8" to 3/4"	0.50 x pressure rating shown in table 1 (see page 9)
20 mm to 25 mm, 7/8" to 1"	0.25 x pressure rating shown in table 1 (see page 9)

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

768 LR MALE CONNECTOR

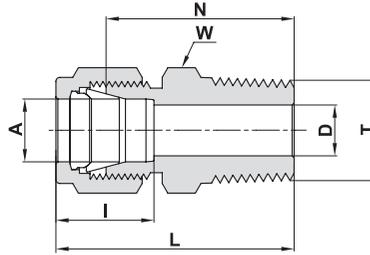

TUBE (METRIC) ISO TAPERED THREAD

Ordering Information	A	T	D	W	N	L	I
	Tube O.D. mm	(ISO) inch	mm	Hex. Flat mm	mm	mm	mm
768LR_2 X 1/8	2	R-1/8	1.7	12	23.9	30.5	12.9
768LR_3 X 1/8	3	R-1/8	2.4	12	23.9	30.5	12.9
768LR_3 X 1/4	3	R-1/4	2.4	14	29.0	35.6	12.9
768LR_4 X 1/8	4	R-1/8	2.4	12	24.6	31.2	13.7
768LR_4 X 1/4	4	R-1/4	2.4	14	29.7	36.3	13.7
768LR_6 X 1/8	6	R-1/8	4.8	14	25.4	32.8	15.3
768LR_6 X 1/4	6	R-1/4	4.8	14	30.5	37.9	15.3
768LR_6 X 3/8	6	R-3/8	4.8	18	31.0	38.4	15.3
768LR_6 X 1/2	6	R-1/2	4.8	22	37.3	44.7	15.3
768LR_8 X 1/8	8	R-1/8	4.8	15	26.7	34.2	16.2
768LR_8 X 1/4	8	R-1/4	6.4	15	31.2	38.7	16.2
768LR_8 X 3/8	8	R-3/8	6.4	18	31.8	39.2	16.2
768LR_8 X 1/2	8	R-1/2	6.4	22	38.1	45.6	16.2
768LR_10 X 1/8	10	R-1/8	4.8	18	28.7	36.3	17.2
768LR_10 X 1/4	10	R-1/4	7.9	18	33.3	40.9	17.2
768LR_10 X 3/8	10	R-3/8	7.9	18	33.3	40.9	17.2
768LR_10 X 1/2	10	R-1/2	7.9	22	38.9	46.5	17.2
768LR_10 X 3/4	10	R-3/4	7.9	27	40.4	48.0	17.2
768LR_12 X 1/4	12	R-1/4	7.1	22	33.3	43.4	22.8
768LR_12 X 3/8	12	R-3/8	9.5	22	33.3	43.4	22.8
768LR_12 X 1/2	12	R-1/2	9.5	22	38.9	49.0	22.8
768LR_12 X 3/4	12	R-3/4	9.5	27	40.4	50.5	22.8
768LR_14 X 1/4	14	R-1/4	7.1	24	34.0	44.1	24.4
768LR_14 X 3/8	14	R-3/8	9.5	24	34.0	44.1	24.4
768LR_15 X 1/2	15	R-1/2	11.9	24	38.9	49.0	24.4
768LR_16 X 1/4	16	R-1/4	7.1	24	34.0	44.1	24.4
768LR_16 X 3/8	16	R-3/8	9.5	24	34.0	44.1	24.4
768LR_16 X 1/2	16	R-1/2	11.9	24	38.9	49.0	24.4
768LR_16 X 3/4	16	R-3/4	12.7	27	40.4	50.5	24.4
768LR_18 X 1/2	18	R-1/2	11.9	27	40.4	50.5	24.4
768LR_18 X 3/4	18	R-3/4	15.1	27	40.4	50.5	24.4
768LR_20 X 1/2	20	R-1/2	11.9	30	42.2	52.3	26.0
768LR_20 X 3/4	20	R-3/4	15.9	30	42.2	52.3	26.0
768LR_22 X 3/4	22	R-3/4	15.9	30	42.2	52.3	26.0
768LR_22 X 1	22	R-1	18.3	35	47.0	57.1	26.0
768LR_25 X 1/2	25	R-1/2	11.9	35	45.2	57.5	31.3
768LR_25 X 3/4	25	R-3/4	15.9	35	45.2	57.5	31.3
768LR_25 X 1	25	R-1	21.8	35	45.2	57.5	31.3
768LR_30 X 1 1/4	30 ¹	R-1 1/4	26.2	46	55.6	77.2	39.6

Designation:
Marking LR on Hex


Reference Specifications:

DIN - ISO 2999
BS - 21
JIS - B0203
ISO - 7/1-BSP-T

Thermoelement
(See Page 36)

¹ Including low friction paste. (see page 102)
"D" - Dimension is minimum opening.
Dimensions are for reference only and
subject to change without notice.

768 LR
MALE
CONNECTOR
 (CONT'D)

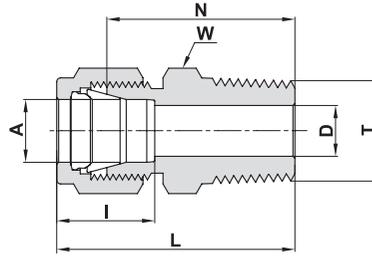

TUBE (METRIC) ISO TAPERED THREAD

Ordering Information	A	T	D	W	N	L	I
	Tube O.D. mm	(ISO) inch	mm	Hex. Flat mm	mm	mm	mm
768LR_32 X 1 1/4	32*	R-1 1/4	28.6	46	56.6	79.6	42
768LR_38 X 1 1/2	*38	R-1 1/2	33.7	55	64.0	91.6	49.4
768LR_50 X 2"	50*	R-2	45.2	3 inch	76.2	113.3	65.0

TUBE (INCH) ISO TAPERED THREAD


Ordering Information	A		T	D		W	N		L		I	
	inch	mm	(ISO) inch	inch	mm	Hex. Flat inch	inch	mm	inch	mm	inch	mm
768LR_1/8 X 1/8	1/8	3.17	R-1/8	.09	2.28	7/16	.94	23.90	1.20	30.48	.50	12.70
768LR_1/8 X 1/4	1/8	3.17	R-1/4	.09	2.28	9/16	1.14	28.95	1.40	35.56	.50	12.70
768LR_1/4 X 1/8	1/4	6.35	R-1/8	.19	4.82	1/2	1.00	25.40	1.29	32.76	.60	15.20
768LR_1/4 X 1/4	1/4	6.35	R-1/4	.19	4.82	9/16	1.20	30.50	1.49	37.85	.60	15.20
768LR_1/4 X 3/8	1/4	6.35	R-3/8	.19	4.82	11/16	1.22	30.98	1.51	38.35	.60	15.20
768LR_1/4 X 1/2	1/4	6.35	R-1/2	.19	4.82	7/8	1.47	37.34	1.76	44.70	.60	15.20
768LR_5/16 X 1/8	5/16	7.93	R-1/8	.19	4.82	9/16	1.05	26.67	1.34	34.03	.64	16.20
768LR_5/16 X 1/4	5/16	7.93	R-1/4	.25	6.35	9/16	1.23	31.24	1.52	38.60	.64	16.20
768LR_3/8 X 1/8	3/8	9.52	R-1/8	.19	4.82	5/8	1.10	27.90	1.39	35.30	.66	16.80
768LR_3/8 X 1/4	3/8	9.52	R-1/4	.28	7.11	5/8	1.28	32.51	1.57	39.87	.66	16.80
768LR_3/8 X 3/8	3/8	9.52	R-3/8	.28	7.11	11/16	1.28	32.51	1.57	39.87	.66	16.80
768LR_3/8 X 1/2	3/8	9.52	R-1/2	.28	7.11	7/8	1.53	38.90	1.82	46.23	.66	16.80
768LR_3/8 X 3/4	3/8	9.52	R-3/4	.28	7.11	1 1/16	1.59	40.38	1.88	47.75	.66	16.80
768LR_1/2 X 1/4	1/2	12.70	R-1/4	.28	7.11	13/16	1.31	33.27	1.71	43.43	.90	22.90
768LR_1/2 X 3/8	1/2	12.70	R-3/8	.38	9.65	13/16	1.31	33.27	1.71	43.43	.90	22.90
768LR_1/2 X 1/2	1/2	12.70	R-1/2	.41	10.41	7/8	1.53	38.90	1.93	49.02	.90	22.90
768LR_1/2 X 3/4	1/2	12.70	R-3/4	.41	10.41	1 1/16	1.59	40.38	1.99	50.54	.90	22.90
768LR_5/8 X 1/2	5/8	15.87	R-1/2	.47	11.90	15/16	1.53	38.86	1.93	49.02	.96	24.40
768LR_3/4 X 3/4	3/4	19.05	R-3/4	.62	15.74	1 1/16	1.59	40.38	1.99	50.54	.96	24.40
768LR_3/4 X 1	3/4	19.05	R-1	.62	15.74	1 3/8	1.85	47.00	2.25	57.15	.96	24.40
768LR_1 X 3/4	1	25.40	R-3/4	.63	15.90	1 3/8	1.78	45.21	2.26	57.40	1.23	31.20
768LR_1 X 1	1	25.40	R-1	.88	22.35	1 3/8	1.97	50.03	2.45	62.23	1.23	31.20
768LR_1 1/4 X 1 1/4	1 1/4 ¹	31.75	R-1 1/4	1.09	27.70	1 3/4	2.17	55.12	3.04	77.22	1.62	41.20

¹ Including low friction paste, (see page 102)

Reference Specifications:

DIN -ISO 2999
 BS - 21
 JIS - B0203
 ISO - 7/1-BSP-T

55° Thread angle
 Truncation of root and crest is round
 Taper angle 1°47'

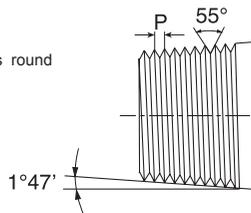



Designation:

Marking LR on Hex

Thermoelement (see Page 36)

"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

768 LG MALE CONNECTOR


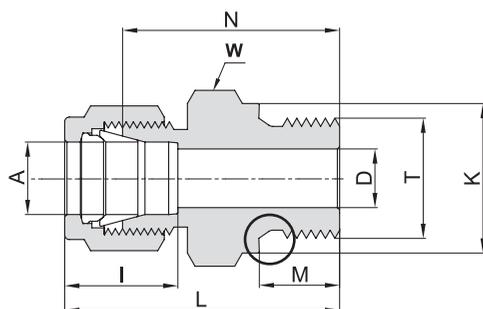


TUBE (METRIC) ISO PARALLEL THREAD

Ordering Information	A	T	D	K	W	N	M	L	I
	Tube O.D.	(P-ISO)							
	mm	inch	mm	mm	mm	mm	mm	mm	mm
768LG_2 X 1/8	2	G-1/8	1.7	13.8	14	23.4	7.1	30.0	12.9
768LG_3 X 1/8	3	G-1/8	2.4	13.8	14	23.4	7.1	30.0	12.9
768LG_3 X 1/4	3	G-1/4	2.4	18.0	19	28.7	11.2	35.3	12.9
768LG_4 X 1/8	4	G-1/8	2.4	13.8	14	24.1	7.1	30.7	13.7
768LG_6 X 1/8	6	G-1/8	4.0	13.8	14	24.9	7.1	32.3	15.3
768LG_6 X 1/4	6	G-1/4	4.8	18.0	19	30.2	11.2	37.6	15.3
768LG_6 X 3/8	6	G-3/8	4.8	21.8	22	31.5	11.2	38.9	15.3
768LG_6 X 1/2	6	G-1/2	4.8	26.0	27	37.3	14.2	44.7	15.3
768LG_8 X 1/8	8	G-1/8	4.0	13.8	15	25.7	7.1	33.2	16.2
768LG_8 X 1/4	8	G-1/4	6.4	18.0	19	31.0	11.2	38.5	16.2
768LG_8 X 3/8	8	G-3/8	6.4	21.8	22	32.3	11.2	39.8	16.2
768LG_8 X 1/2	8	G-1/2	6.4	26.0	27	38.1	14.2	45.6	16.2
768LG_10 X 1/4	10	G-1/4	5.9	18.0	19	31.8	11.2	39.4	17.2
768LG_10 X 3/8	10	G-3/8	7.9	21.8	22	33.0	11.2	40.6	17.2
768LG_10 X 1/2	10	G-1/2	7.9	26.0	27	38.9	14.2	46.5	17.2
768LG_12 X 1/4	12	G-1/4	5.9	18.0	22	32.5	11.2	42.6	22.8
768LG_12 X 3/8	12	G-3/8	7.9	21.8	22	33.0	11.2	43.1	22.8
768LG_12 X 1/2	12	G-1/2	9.5	26.0	27	37.4	14.2	47.5	22.8
768LG_12 X 3/4	12	G-3/4	9.5	32.0	35	42.7	15.7	52.8	22.8
768LG_14 X 3/8	14	G-3/8	7.9	21.8	24	33.8	11.2	43.9	24.4
768LG_14 X 1/2	14	G-1/2	11.1	26.0	27	38.9	14.2	49.0	24.4
768LG_15 X 3/8	15	G-3/8	7.9	21.8	24	33.8	11.2	43.9	24.4
768LG_15 X 1/2	15	G-1/2	11.9	26.0	27	37.4	14.2	47.5	24.4
768LG_15 X 3/4	15	G-3/4	11.9	32.0	35	42.1	15.7	52.8	24.4
768LG_16 X 3/8	16	G-3/8	7.9	21.8	24	33.8	11.2	43.9	24.4
768LG_16 X 1/2	16	G-1/2	11.9	26.0	27	38.9	14.2	49.0	24.4
768LG_16 X 3/4	16	G-3/4	12.7	32.0	35	42.1	15.7	52.8	24.4
768LG_18 X 1/2	18	G-1/2	11.9	26.0	27	38.9	14.2	49.0	24.4
768LG_18 X 3/4	18	G-3/4	15.1	32.0	35	42.7	15.7	52.8	24.4
768LG_20 X 1/2	20	G-1/2	11.9	26.0	30	40.4	14.2	50.5	26.0
768LG_20 X 3/4	20	G-3/4	15.9	32.0	35	42.7	15.7	52.8	26.0
768LG_22 X 3/4	22	G-3/4	15.9	32.0	35	42.7	15.7	52.8	26.0
768LG_22 X 1	22	G-1	18.3	39.0	41	45.2	18.3	55.3	26.0
768LG_25 X 3/4	25	G-3/4	15.9	32.0	35	45.2	15.7	57.5	31.3
768LG_25 X 1	25	G-1	19.8	39.0	41	47.8	18.3	60.1	31.3
768LG_30 X 1 1/4	30 ¹	G-1 1/4	25	49	50	55.6	19.8	76.7	39.6
768LG_32 X 1 1/4	32 ¹	G-1 1/4	25	49	50	56.2	19.8	79.2	42
768LG_38 X 1 1/2	38 ¹	G-1 1/2	31.8	54.7	55	63.2	22.1	90.9	49.4

(For parallel threads sealing (see page 86

768 LG
MALE
CONNECTOR
 (CONT'D)

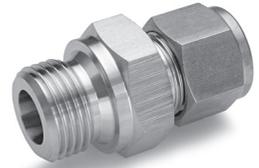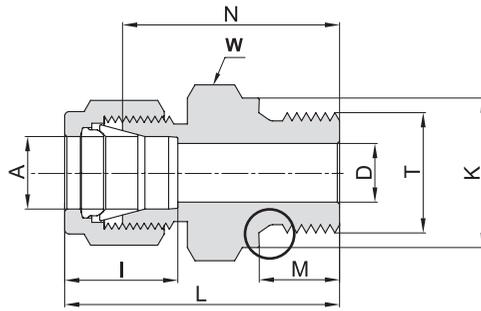


TUBE (INCH) TO ISO PARALLEL THREAD

Ordering Information	A Tube O.D.		T (P-ISO)	D		K		W Hex. Flat	N		M		L		I	
	inch	mm		inch	mm	inch	mm		inch	mm	inch	mm	inch	mm	inch	mm
768LG_ 1/8 X 1/8	1/8	3.17	G-1/8	0.09	2.30	0.54	13.80	9/16	0.92	23.40	0.28	7.10	1.18	30.00	0.50	12.7
768LG_ 1/8 X 1/4	1/8	3.17	G-1/4	0.09	2.30	0.71	18.00	3/4	1.13	28.70	0.44	11.20	1.39	35.30	0.50	12.7
768LG_ 1/8 X 3/8	1/8	3.17	G-3/8	0.09	2.30	0.86	21.80	7/8	1.17	29.72	0.44	11.20	1.43	36.32	0.50	12.7
768LG_ 1/8 X 1/2	1/8	3.17	G-1/2	0.09	2.30	1.02	26.00	1 1/16	1.40	35.70	0.56	14.20	1.66	42.16	0.50	12.7
768LG_ 3/16 X 1/8	3/16	4.76	G-1/8	0.12	3.10	0.54	13.80	9/16	0.95	24.10	0.28	7.10	1.21	30.70	0.54	13.7
768LG_ 1/4 X 1/8	1/4	6.35	G-1/8	0.16	4.10	0.54	13.80	9/16	0.98	24.90	0.28	7.10	1.27	32.26	0.60	15.2
768LG_ 1/4 X 1/4	1/4	6.35	G-1/4	0.19	4.80	0.71	18.00	3/4	1.19	30.20	0.44	11.20	1.48	37.60	0.60	15.2
768LG_ 1/4 X 3/8	1/4	6.35	G-3/8	0.19	4.80	0.86	21.80	7/8	1.24	31.50	0.44	11.20	1.50	38.10	0.60	15.2
768LG_ 1/4 X 1/2	1/4	6.35	G-1/2	0.19	4.80	1.02	26.00	1 1/16	1.47	37.30	0.56	14.20	1.76	44.70	0.60	15.2
768LG_ 5/16 X 1/4	5/16	7.93	G-1/4	0.23	5.80	0.71	18.00	3/4	1.22	31.00	0.44	11.20	1.51	38.36	0.64	16.2
768LG_ 5/16 X 3/8	5/16	7.93	G-3/8	0.25	6.40	0.86	21.80	7/8	1.27	32.30	0.44	11.20	1.56	39.66	0.64	16.2
768LG_ 3/8 X 1/8	3/8	9.52	G-1/8	0.16	4.00	1.26	32.0	5/8	1.05	26.7	0.28	7.10	1.34	34.03	0.66	16.8
768LG_ 3/8 X 1/4	3/8	9.52	G-1/4	0.23	5.80	0.71	18.00	3/4	1.25	31.75	0.44	11.20	1.54	39.11	0.66	16.8
768LG_ 3/8 X 3/8	3/8	9.52	G-3/8	0.28	7.10	0.86	21.80	7/8	1.30	33.00	0.44	11.20	1.59	40.40	0.66	16.8
768LG_ 3/8 X 1/2	3/8	9.52	G-1/2	0.28	7.10	1.02	26.00	1 1/16	1.53	38.86	0.56	14.20	1.82	46.22	0.66	16.8
768LG_ 1/2 X 1/4	1/2	12.70	G-1/4	0.23	5.80	0.71	18.00	13/16	1.28	32.50	0.44	11.20	1.68	42.67	0.90	22.9
768LG_ 1/2 X 3/8	1/2	12.70	G-3/8	0.31	7.90	0.86	21.80	7/8	1.30	33.00	0.44	11.20	1.70	43.18	0.90	22.9
768LG_ 1/2 X 1/2	1/2	12.70	G-1/2	0.41	10.40	1.02	26.00	1 1/16	1.47	37.40	0.56	14.20	1.87	47.56	0.90	22.9
768LG_ 1/2 X 3/4	1/2	12.70	G-3/4	0.41	10.40	1.26	32.00	1 5/16	1.68	42.70	0.62	15.70	2.08	52.86	0.90	22.9
768LG_ 5/8 X 3/8	5/8	15.87	G-3/8	0.31	7.90	0.86	21.80	24mm	1.33	33.80	0.44	11.20	1.73	43.96	0.96	24.4
768LG_ 5/8 X 1/2	5/8	15.87	G-1/2	0.47	11.90	1.02	26.00	1 1/16	1.53	38.90	0.56	14.20	1.93	49.10	0.96	24.4
768LG_ 3/4 X 1/2	3/4	19.05	G-1/2	0.47	11.90	1.02	26.00	1 1/16	1.53	38.86	0.56	14.20	1.93	49.00	0.96	24.4
768LG_ 3/4 X 3/4	3/4	19.05	G-3/4	0.62	15.80	1.26	32.00	1 5/16	1.68	42.70	0.62	15.70	2.08	52.83	0.96	24.4
768LG_ 1 X 1/2	1	25.40	G-1/2	0.47	11.90	1.02	26.00	1 3/8	1.72	43.70	0.56	14.20	2.20	55.80	1.23	31.2
768LG_ 1 X 3/4	1	25.40	G-3/4	0.62	15.90	1.26	32.00	1 3/8	1.78	45.20	0.62	15.70	2.26	57.40	1.23	31.2
768LG_ 1 X 1	1	25.40	G-1	0.78	19.80	1.54	39.00	1 5/8	1.88	47.80	0.72	18.30	2.36	59.94	1.23	31.2



Designation:
 Marking LG on Hex.

- Reference Specifications:**
- DIN - ISO 228/1
 - BS - 2779
 - JIS - B0202
 - ISO - 228/1-BSP-P
 - 55° thread angle
 - Pitch measured in inches
 - Truncation of root and crest is round
 - Diameter measured in inches

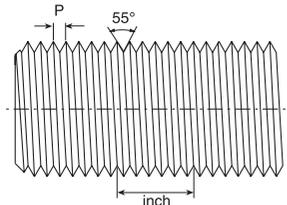

(For parallel threads sealing (see page 86

768 LOK MALE CONNECTOR

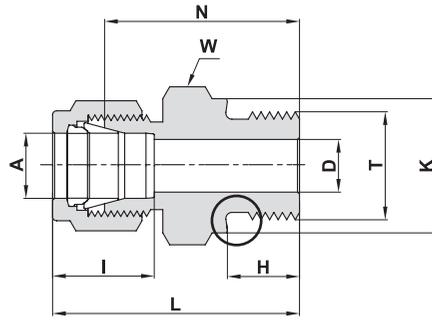

TUBE (METRIC) ISO PARALLEL THREAD

Ordering Information	A	T	D	K	W	N	H	L	I
	Tube O.D.	(P-ISO)			Hex. Flat				
	mm	inch	mm	mm	mm	mm	mm	mm	mm
768LOK_ 3 X 1/8	3	G-1/8A	2.4	13.8	14	26.7	7.1	33.3	12.9
768LOK_ 3 X 1/4	3	G-1/4A	2.4	18.0	19	28.7	11.2	35.3	12.9
768LOK_ 4 X 1/8	4	G-1/8A	2.4	13.8	14	24.1	7.1	30.7	13.7
768LOK_ 6 X 1/8	6	G-1/8A	4.0	13.8	14	24.9	7.1	32.3	15.3
768LOK_ 6 X 1/4	6	G-1/4A	4.8	18.0	19	30.2	11.2	37.6	15.3
768LOK_ 6 X 3/8	6	G-3/8A	4.8	21.8	22	31.5	11.2	38.9	15.3
768LOK_ 6 X 1/2	6	G-1/2A	4.8	26.0	27	37.3	14.2	44.7	15.3
768LOK_ 8 X 1/8	8	G-1/8A	4.0	13.8	15	25.7	7.1	33.2	16.2
768LOK_ 8 X 1/4	8	G-1/4A	6.4	18.0	19	31.0	11.2	38.5	16.2
768LOK_ 8 X 3/8	8	G-3/8A	6.4	21.8	22	32.3	11.2	39.8	16.2
768LOK_ 8 X 1/2	8	G-1/2A	6.4	26.0	27	38.1	14.2	45.6	16.2
768LOK_ 10 X 1/4	10	G-1/4A	6.4	18.0	19	31.8	11.2	39.4	17.2
768LOK_ 10 X 3/8	10	G-3/8A	7.9	21.8	22	33.0	11.2	40.6	17.2
768LOK_ 10 X 1/2	10	G-1/2A	7.9	26.0	27	38.9	14.2	46.5	17.2
768LOK_ 12 X 1/4	12	G-1/4A	5.9	18.0	22	32.5	11.2	42.6	22.8
768LOK_ 12 X 3/8	12	G-3/8A	7.9	21.8	22	33.0	11.2	43.1	22.8
768LOK_ 12 X 1/2	12	G-1/2A	9.5	26.0	27	38.9	14.2	49.0	22.8
768LOK_ 12 X 3/4	12	G-3/4A	9.5	32.0	35	42.7	15.7	52.8	22.8
768LOK_ 15 X 1/2	15	G-1/2A	11.9	26.0	27	38.9	14.2	49.0	24.4
768LOK_ 16 X 3/8	16	G-3/8A	7.9	21.8	24	33.8	11.2	43.9	22.4
768LOK_ 16 X 1/2	16	G-1/2A	11.9	26.0	27	38.9	14.2	49.0	22.4
768LOK_ 18 X 1/2	18	G-1/2A	11.9	26.0	27	38.9	14.2	49.0	22.4
768LOK_ 18 X 3/4	18	G-3/4A	15.1	32.0	35	42.2	15.7	52.3	22.4
768LOK_ 20 X 1/2	20	G-1/2A	11.9	26.0	30	40.4	14.2	50.5	26.0
768LOK_ 20 X 3/4	20	G-3/4A	15.9	32.0	35	42.7	15.7	52.8	26.0
768LOK_ 22 X 3/4	22	G-3/4A	15.9	32.0	35	42.7	15.7	52.8	26.0
768LOK_ 22 X 1	22	G-1A	18.3	39.0	41	45.2	18.3	55.3	26.0
768LOK_ 25 X 3/4	25	G-3/4A	15.9	32.0	35	45.2	15.7	57.5	31.3
768LOK_ 25 X 1	25	G-1A	19.8	39.0	41	47.8	18.3	60.1	31.3
768LOK_ 30 X 1 1/4	30 ¹	G-1 1/4A	26.2	49	50	55.2	19.8	76.8	39.6
768LOK_ 32 X 1 1/4	32 ¹	G-1 1/4A	28.6	49	50	55.9	19.8	78.9	42
768LOK_ 38 X 1 1/2	38 ¹	G-1 1/2A	31.8	54.7	55	64.9	20.6	92.1	49.4

¹ Including low friction paste, (see page 102)

(For parallel threads sealing (see page 86

Reference Specifications:


DIN - ISO 228/1
BS - 2779
JIS - B0202
ISO - 228/1-BSP-P

Designation:

Marking LOK on Hex

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

**768 LOK
MALE
CONNECTOR
(CONT'D)**

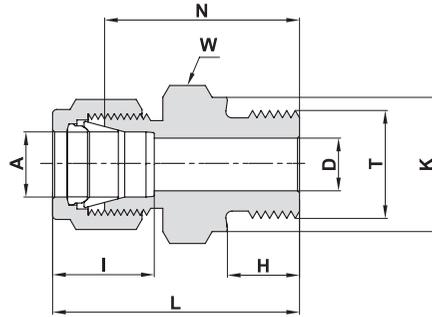

TUBE (INCH) TO ISO PARALLEL THREAD

Ordering Information	A Tube O.D.		T Straight Thread UN	D		K		W Hex. Flat	N		H		L		I	
	inch	mm	inch	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm
768LOK_ 1/8 X 1/8	1/8	3.17	G-1/8A	0.09	2.30	0.54	13.80	9/16	0.92	23.40	0.28	7.10	1.18	30.00	0.50	12.7
768LOK_ 1/8 X 1/4	1/8	3.17	G-1/4A	0.09	2.30	0.71	18.00	3/4	1.13	28.70	0.44	11.20	1.39	35.30	0.50	12.7
768LOK_ 1/4 X 1/8	1/4	6.35	G-1/8A	0.16	4.10	0.54	13.80	9/16	0.98	24.90	0.28	7.10	1.27	32.26	0.60	15.2
768LOK_ 1/4 X 1/4	1/4	6.35	G-1/4A	0.19	4.80	0.71	18.00	3/4	1.19	30.20	0.44	11.20	1.48	37.60	0.60	15.2
768LOK_ 1/2 X 3/8	1/2	12.70	G-3/8A	0.31	7.90	0.86	21.80	7/8	1.30	33.00	0.44	11.20	1.70	43.18	0.90	22.9
768LOK_ 1/2 X 1/2	1/2	12.70	G-1/2A	0.41	10.40	1.02	26.00	1-1/16	1.53	39.86	0.56	14.20	1.93	49.02	0.90	22.9
768LOK_ 3/4 X 1/2	3/4	19.05	G-1/2A	0.47	11.90	1.02	26.00	1-1/16	3.65	41.91	0.56	14.20	2.05	52.07	0.96	24.4
768LOK_ 3/4 X 3/4	3/4	19.05	G-3/4A	0.62	15.80	1.26	32.00	1 3/8	1.68	42.70	0.62	15.70	2.08	52.83	0.96	24.4
768LOK_ 1 X 1	1	25.40	G-1A	0.78	19.80	1.54	39.00	1 5/8	1.88	47.80	0.72	18.30	2.36	59.94	1.23	31.2


(For parallel threads sealing (see page 86)

Reference Specifications:

- DIN - ISO 228/1
- BS - 2779
- JIS - B0202
- ISO - 228/1-BSP-P

Designation:

Marking LOK on Hex.

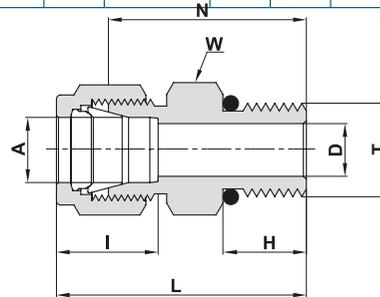

**768 LOB
MALE CONNECTOR**

SAE/MS STRAIGHT THREAD BOSS***

Ordering Information	A Tube O.D.	T Straight Thread UN	D	W Hex. Flat	N	H	L	I	O-Ring**
	mm	inch	mm	mm	mm	mm	mm	mm	
768LOB_ 3 X 5/16-24	3	5/16-24	2.4	7/16"	23.4	7.6	30.0	12.9	-902
768LOB_ 3 X 9/16-18	3	9/16-18	2.4	18	26.7	9.9	33.3	12.9	-906
768LOB_ 6 X 1/2-20	6	1/2-20	4.8	17	27.4	9.1	34.8	15.3	-905
768LOB_ 6 X 9/16-18	6	9/16-18	4.8	18	28.2	9.9	35.6	15.3	-906
768LOB_ 6 X 7/8-14	6	7/8-14	4.8	27	33.3	12.7	40.7	15.3	-910
768LOB_ 8 X 1/2-20	8	1/2-20	6.4	17	27.4	9.1	34.9	16.2	-905
768LOB_ 8 X 9/16-18	8	9/16-18	6.4	18	29.1	9.9	36.6	16.2	-906
768LOB_ 10 X 9/16-18	10	9/16-18	7.1	18	29.7	9.9	37.3	17.2	-906
768LOB_ 10 X 3/4-16	10	3/4-16	7.9	22	31.8	11.2	39.4	17.2	-908
768LOB_ 12 X 7/16-20	12	7/16-20	5.2	22	30.5	9.1	40.6	22.8	-904
768LOB_ 12 X 9/16-18	12	9/16-18	7.1	22	29.0	9.9	39.1	22.8	-906
768LOB_ 12 X 3/4-16	12	3/4-16	9.5	22	31.8	11.2	41.9	22.8	-908
768LOB_ 16 X 9/16-18	16	9/16-18	7.1	24	21.2	9.9	31.3	24.4	-906
768LOB_ 25 X 1 1/16-12	25	1 1/16-12	16.7	35	41.2	15.0	53.5	31.3	-912


Designation: Marking LOB on Hex.

Per SAE J1926 and MS 16142. See page 54 for mounting dimensions.***

Standard O-rings materials are Fluorocarbon FKM 90 Durometer. Other O-ring materials are available upon request.**

*"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

768 LOB
MALE CONNECTOR
 (CONT'D)

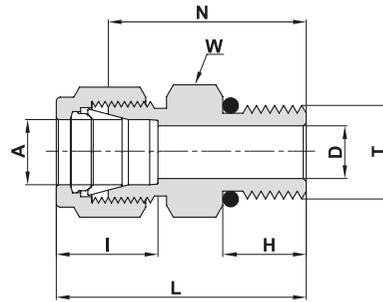

SAE/MS STRAIGHT THREAD BOSS³

Ordering Information	A Tube O.D.		T Straight Thread UN	D		W Hex. Flat	N		H		L		I		O-RING ²
	inch	mm		inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	
768LOB_ 1/8 X 5/16-24	1/8	3.17	5/16-24	.09	2.28	7/16	.92	23.37	.30	7.62	1.18	29.97	.50	12.7	-902
768LOB_ 1/8 X 7/16-20	1/8	3.17	7/16-20	.09	2.28	9/16	.98	24.89	.36	9.14	1.24	31.50	.50	12.7	-904
768LOB_ 1/8 X 9/16-18	1/8	3.17	9/16-18	.09	2.28	11/16	1.05	26.67	.39	9.90	1.31	33.27	.50	12.7	-906
768LOB_ 1/4 X 5/16-24	1/4	6.35	5/16-24	.09	2.28	9/16	.92	23.37	.30	7.62	1.21	30.73	.60	15.2	-902
768LOB_ 1/4 X 7/16-20	1/4	6.35	7/16-20	.19	4.82	9/16	1.05	26.67	.36	9.14	1.34	34.03	.60	15.2	-904
768LOB_ 1/4 X 9/16-18	1/4	6.35	9/16-18	.19	4.82	11/16	1.11	28.19	.39	9.90	1.40	35.56	.60	15.2	-906
768LOB_ 1/4 X 3/4 -16	1/4	6.35	3/4 -16	.19	4.82	7/8	1.19	30.20	.44	11.17	1.48	37.59	.60	15.2	-908
768LOB_ 1/4 X 7/8-14	1/4	6.35	7/8-14	.19	4.82	1	1.31	33.27	.50	12.70	1.60	40.64	.60	15.2	-910
768LOB_ 5/16 X 1/2-20	5/16	7.93	1/2-20	.25	6.40	5/8	1.08	27.43	.36	9.14	1.37	34.80	.64	16.2	-905
768LOB_ 3/8 X 7/16-20	3/8	9.52	7/16-20	.20	5.10	5/8	1.11	28.19	.36	9.14	1.40	35.56	.66	16.8	-904
768LOB_ 3/8 X 9/16-18	3/8	9.52	9/16-18	.28	7.11	11/16	1.17	29.71	.39	9.90	1.46	37.02	.66	16.8	-906
768LOB_ 3/8 X 3/4 -16	3/8	9.52	3/4 -16	.28	7.11	7/8	1.25	31.75	.44	11.17	1.54	39.11	.66	16.8	-908
768LOB_ 3/8 X 7/8-14	3/8	9.52	7/8-14	.28	7.11	1	1.37	34.80	.50	12.70	1.66	42.16	.66	16.8	-910
768LOB_ 1/2 X 9/16-18	1/2	12.70	9/16-18	.28	7.11	13/16	1.14	28.95	.39	9.90	1.54	39.11	.90	22.9	-906
768LOB_ 1/2 X 3/4 -16	1/2	12.70	3/4 -16	.41	10.41	7/8	1.25	31.75	.44	11.17	1.65	41.91	.90	22.9	-908
768LOB_ 1/2 X 7/8-14	1/2	12.70	7/8-14	.41	10.41	1	1.37	34.80	.50	12.70	1.77	44.96	.90	22.9	-910
768LOB_ 1/2 X 1 1/16-12	1/2	12.70	1 1/16-12	.41	10.41	1 1/4	1.53	38.86	.59	14.98	1.93	49.02	.90	22.9	-912
768LOB_ 5/8 X 3/4 -16	5/8	15.87	3/4 -16	.42	10.66	15/16	1.25	31.75	.44	11.17	1.65	41.91	.96	22.4	-908
768LOB_ 5/8 X 7/8 -14	5/8	15.87	7/8 -14	.50	12.70	1	1.38	35.05	.50	12.70	1.78	45.21	.96	22.4	-910
768LOB_ 3/4 X 3/4 -16	3/4	19.05	3/4 -16	.42	10.66	1 1/16	1.41	35.81	.44	11.17	1.81	46.0	.96	22.4	-908
768LOB_ 3/4 X 1 1/16 -12	3/4	19.05	1 1/16 -12	.62	15.74	1 1/4	1.53	38.86	.59	14.98	1.93	49.02	.96	22.4	-912
768LOB_ 3/4 X 1 5/16-12	3/4	19.05	1 5/16-12	.62	15.74	1 1/2	1.66	42.16	.59	14.98	2.06	52.32	1.02	25.9	-916
768LOB_ 7/8 X 1 3/16 -12	7/8	22.22	1 3/16 -12	.72	18.29	1 3/8	1.53	38.86	.59	14.98	1.93	49.02	1.02	25.9	-914
768LOB_ 1 X 1 1/16 -12	1	25.40	1 1/16 -12	.66	16.76	1 3/8	1.62	41.20	.59	14.98	2.10	53.34	1.23	31.2	-912
768LOB_ 1 X 1 5/16 -12	1	25.40	1 5/16 -12	.88	22.35	1 1/2	1.66	42.16	.59	14.98	2.14	54.35	1.23	31.2	-916
768LOB_ 1 1/4 X 1 5/8 -12	1 1/4	31.75	1 5/8 -12	1.09	27.70	1 7/8	1.82	46.23	.59	15.10	2.69	68.33	1.62	41.2	-920
768LOB_ 1 1/2 X 1 7/8 -12	1 1/2	38.10	1 7/8 -12	1.34	34.00	2 1/8	1.99	50.55	.59	15.10	3.06	77.72	1.97	50.0	-924
768LOB_ 2 X 2 1/2 -12	2	50.80	2 1/2 -12	1.81	45.97	2 3/4	2.53	64.26	.59	15.10	4.00	101.60	2.66	67.6	-932

Designation: Marking LOB on Hex.


¹Including low friction paste, see page 102

²Standard O-rings materials are Fluorocarbon FKM 90 Durometer. Other O-ring materials are available upon request.

³Per SAE J1926 and MS 16142. See page 54 for mounting dimensions.

"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

768 LOP MALE CONNECTOR

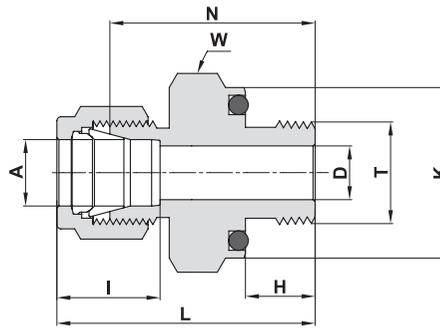

O-SEAL NPT TAPERED THREAD


Ordering Information	A Tube O.D.		T (NPT) Short	D Hex. Flat		K		W Hex. Flat	N		H		L		I	O-RING ²	
	inch	mm	inch	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch		mm
768LOP_ 1/8 X 1/8	1/8	3.17	1/8	.09	2.28	.74	18.79	3/4	1.03	26.16	.28	7.11	1.29	32.76	.50	12.7	-111
768LOP_ 1/4 X 1/8	1/4	6.35	1/8	.19	4.82	.74	18.79	3/4	1.09	27.70	.28	7.11	1.38	35.05	.60	15.2	-111
768LOP_ 1/4 X 1/4	1/4	6.35	1/4	.19	4.82	.93	23.62	15/16	1.22	31.00	.38	9.65	1.51	38.40	.60	15.2	-113
768LOP_ 3/8 X 1/4	3/8	9.52	1/4	.28	7.11	.93	23.62	15/16	1.28	32.51	.38	9.65	1.57	39.88	.66	16.8	-113
768LOP_ 3/8 X 3/8	3/8	9.52	3/8	.28	7.11	1.12	28.45	1 1/8	1.34	34.04	.41	10.41	1.63	41.40	.66	16.8	-116
768LOP_ 3/8 X 1/2	3/8	9.52	1/2	.28	7.11	1.30	33.02	1 5/16	1.56	39.62	.53	13.46	1.85	46.99	.66	16.8	-212
768LOP_ 1/2 X 1/2	1/2	12.70	1/2	.41	10.41	1.30	33.02	1 5/16	1.56	39.62	.53	13.46	1.96	49.78	.90	22.9	-212

Designation: Marking LOP on Hex.

²Standard O-rings materials are Fluorocarbon FKM 90 Durometer.

Other O-ring materials are available upon request.

768 LO MALE CONNECTOR

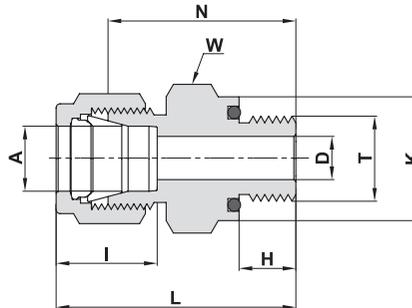

O-SEAL MALE UN THREAD

Ordering Information	A Tube O.D.		T Straight Thread UN	D		K		W Hex. Flat	N		H		L		I	O-RING ²	
	inch	mm	inch	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch		mm
768LO_ 1/16 X 5/16-24	1/16	1.58	5/16-24	.05	1.27	.55	14.0	9/16	.90	22.86	.34	8.63	1.05	26.67	.34	8.6	-011
768LO_ 1/8 X 5/16-24	1/8	3.17	5/16-24	.09	2.28	.55	14.0	9/16	1.03	26.20	.34	8.63	1.29	32.77	.50	12.7	-011
768LO_ 3/16 X 3/8 -24	3/16	4.76	3/8 -24	.12	3.04	.62	15.75	5/8	1.09	27.70	.38	9.65	1.35	34.29	.54	12.7	-012
768LO_ 1/4 X 7/16-20	1/4	6.35	7/16-20	.19	4.82	.74	18.80	3/4	1.22	31.00	.41	10.41	1.51	38.35	.60	15.2	-111
768LO_ 5/16 X 1/2 -20	5/16	7.93	1/2 -20	.25	6.35	.86	21.84	7/8	1.31	33.30	.44	11.17	1.60	40.64	.64	16.2	-112
768LO_ 3/8 X 9/16-18	3/8	9.52	9/16-18	.28	7.11	.93	23.62	15/16	1.38	35.05	.47	11.93	1.67	40.89	.66	16.8	-113
768LO_ 1/2 X 3/4 -16	1/2	12.70	3/4 -16	.41	10.41	1.12	28.45	1 1/8	1.41	35.81	.47	11.93	1.81	45.77	.90	22.9	-116
768LO_ 3/4 X 1 1/16-12	3/4	19.05	1 1/16-12	.62	15.74	1.49	37.85	1 1/2	1.66	42.20	.56	14.22	2.06	52.32	.96	24.4	-215
768LO_ 1 X 1 5/16-12	1	25.40	1 5/16-12	.88	22.35	1.74	44.20	1 3/4	1.81	45.97	.56	14.22	2.29	58.17	1.23	32.2	-219


Designation: Marking LO on Hex.

²Standard O-rings materials are Fluorocarbon FKM 90 Durometer. Other O-ring materials available upon request.

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

768 LN MALE PIPE WELD CONNECTOR

Cont'd next page

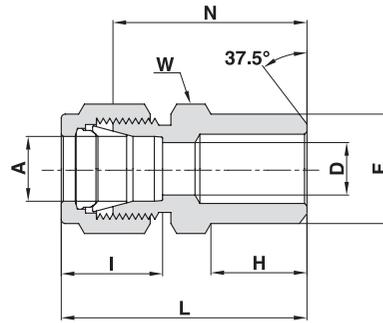

(TUBE (METRIC


Ordering Information	A Tube O.D.		F Pipe Size		D	W Hex. Flat	N	H	L	I
	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm
768LN_3 X 1/8	3	1/8	10.30	2.4	12	23.9	9.7	30.5	12.9	
768LN_4 X 1/8	4	1/8	10.30	2.4	12	24.6	9.7	31.2	13.7	
768LN_6 X 1/8	6	1/8	10.30	4.8	14	25.4	9.7	32.8	15.3	
768LN_6 X 1/4	6	1/4	13.70	4.8	14	30.5	14.2	37.9	15.3	
768LN_8 X 1/8	8	1/8	10.30	5.1	15	26.7	9.7	34.2	16.2	
768LN_8 X 1/4	8	1/4	13.70	6.4	15	31.2	14.2	38.7	16.2	
768LN_8 X 1/2	8	1/2	21.34	6.4	22	38.1	19.0	45.6	16.2	
768LN_10 X 1/4	10	1/4	13.70	7.1	18	33.3	14.2	40.9	17.2	
768LN_10 X 3/8	10	3/8	17.10	7.9	18	33.3	14.2	40.9	17.2	
768LN_10 X 1/2	10	1/2	21.34	7.9	22	38.9	19.0	46.5	17.2	
768LN_12 X 1/4	12	1/4	13.70	7.1	22	33.3	14.2	43.4	22.8	
768LN_12 X 3/8	12	3/8	17.10	9.5	22	33.3	14.2	43.4	22.8	
768LN_12 X 1/2	12	1/2	21.34	9.5	22	38.9	19.0	49.0	22.8	
768LN_12 X 3/4	12	3/4	26.67	9.5	27	40.4	19.0	50.5	22.8	
768LN_14 X 3/8	14	3/8	17.10	10.4	24	34.0	14.2	44.1	24.4	
768LN_15 X 1/2	15	1/2	21.34	11.9	24	38.9	19.0	49.0	24.4	
768LN_16 X 1/2	16	1/2	21.34	12.7	24	38.9	19.0	49.0	24.4	
768LN_18 X 1/2	18	1/2	21.34	13.5	27	40.4	19.0	50.5	24.4	
768LN_30 X 1 1/4	30 ¹	1 1/4	42.2	26.2	46	55.6	23.9	77.2	39.6	
768LN_32 X 1 1/4	32 ¹	1 1/4	42.2	28.6	46	56.6	23.9	79.6	42	
768LN_38 X 1 1/2	38 ¹	1 1/2	48.30	33.7	55	64.0	26.2	91.2	49.4	

Designation: Marking LN on Hex

¹Including low friction paste (see page 102)

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

768 LN
MALE PIPE WELD
CONNECTOR
 (CONT'D)

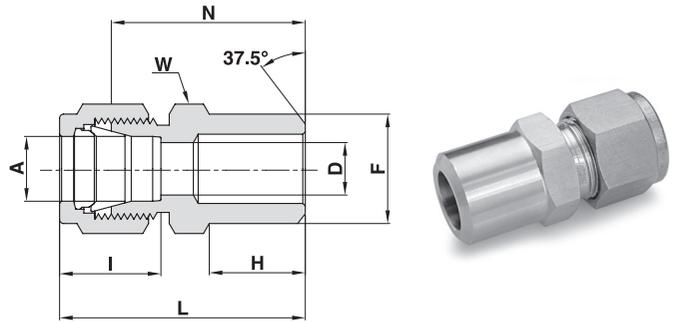


(TUBE (INCH

Ordering Information	A Tube O.D.		F Pipe Size		D		W Hex. Flat	N		H		L		I	
	inch	mm	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm
768LN_ 1/8 X 1/8	1/8	3.17	1/8	10.30	.09	2.28	7/16	.94	23.88	.38	9.65	1.20	30.48	.50	12.7
768LN_ 3/16 X 1/8	3/16	4.76	1/8	10.30	.12	3.04	7/16	.97	24.60	.38	9.65	1.23	31.25	.54	13.7
768LN_ 1/4 X 1/8	1/4	6.35	1/8	10.30	.19	4.82	1/2	1.00	25.40	.38	9.65	1.29	32.77	.60	15.2
768LN_ 1/4 X 1/4	1/4	6.35	1/4	13.70	.19	4.82	9/16	1.20	30.48	.56	14.22	1.49	37.85	.60	15.2
768LN_ 5/16 X 1/8	5/16	7.93	1/8	10.30	.20	5.08	9/16	1.05	26.67	.38	9.65	1.34	34.04	.64	16.2
768LN_ 5/16 X 1/4	5/16	7.93	1/4	13.70	.25	6.35	9/16	1.23	31.24	.56	14.22	1.52	38.61	.64	16.2
768LN_ 3/8 X 1/4	3/8	9.52	1/4	13.70	.28	7.11	5/8	1.28	32.51	.56	14.22	1.57	39.87	.66	16.8
768LN_ 3/8 X 3/8	3/8	9.52	3/8	17.10	.28	7.11	11/16	1.28	32.51	.56	14.22	1.57	39.87	.66	16.8
768LN_ 3/8 X 1/2	3/8	9.52	1/2	21.34	.28	7.11	7/8	1.53	38.86	.75	19.05	1.82	46.22	.66	16.8
768LN_ 3/8 X 3/4	3/8	9.52	3/4	26.67	.28	7.11	1 1/16	1.59	40.38	.75	19.05	1.88	47.75	.66	16.8
768LN_ 1/2 X 3/8	1/2	12.70	3/8	17.10	.41	10.41	13/16	1.31	33.27	.56	14.22	1.71	44.43	.90	22.9
768LN_ 1/2 X 1/2	1/2	12.70	1/2	21.34	.41	10.41	7/8	1.53	38.86	.75	19.05	1.93	49.00	.90	22.9
768LN_ 1/2 X 3/4	1/2	12.70	3/4	26.67	.41	10.41	1 1/16	1.59	40.40	.75	19.05	1.99	50.55	.90	22.9
768LN_ 1/2 X 1	1/2	12.70	1	33.40	.41	10.41	1 3/8	1.87	47.50	.94	23.87	2.27	57.65	.90	22.9
768LN_ 5/8 X 1/2	5/8	15.87	1/2	21.34	.50	12.70	1 5/16	1.53	38.86	.75	19.05	1.93	49.02	.96	24.4
768LN_ 3/4 X 1/2	3/4	19.05	1/2	21.34	.53	13.46	1 1/16	1.53	38.86	.75	19.05	1.93	49.00	.96	24.4
768LN_ 3/4 X 3/4	3/4	19.05	3/4	26.67	.62	15.74	1 1/16	1.59	40.40	.75	19.05	1.99	50.55	.96	24.4
768LN_ 1 X 1	1	25.40	1	33.40	.88	22.35	1 3/8	1.97	50.03	.94	23.87	2.45	62.23	1.23	31.2
768LN_ 1 1/4 X 1 1/4	1 1/4	31.75	1 1/4	42.16	1.09	27.70	1 3/4	2.17	55.12	.94	23.88	3.04	77.22	1.62	41.2
768LN_ 1 1/2 X 1 1/2	1 1/2	38.10	1 1/2	48.26	1.34	34.00	2 1/8	2.43	61.72	1.03	26.16	3.50	88.90	1.97	50.0
768LN_ 2 X 2	2	50.80	2	60.33	1.81	45.97	2 3/4	3.00	76.20	1.06	26.92	4.47	113.34	2.66	67.6

Designation: Marking LN on Hex

768 LW
TUBE SOCKET
WELD UNION

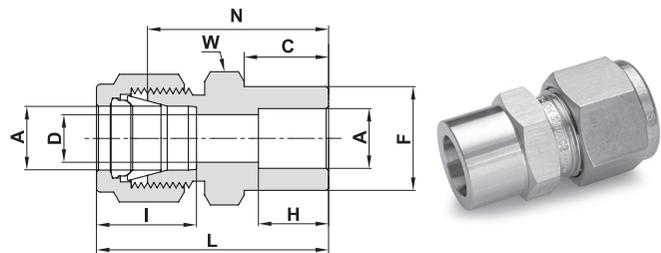

(TUBE (INCH

Ordering Information	A Tube O.D.		C		D		W Hex. Flat	F		H		I		L		N	
	inch	mm	inch	mm	inch	mm	inch	inch	mm								
768LW_ 1/8 X 1/8	1/8	3.17	.34	8.64	.09	2.28	7/16	.31	7.87	.25	6.35	.50	12.70	1.14	28.96	.88	22.35
768LW_ 1/4 X 1/4	1/4	6.35	.41	10.41	.19	4.80	1/2	.44	11.18	.31	7.90	.60	15.20	1.32	33.53	1.03	26.16
768LW_ 3/8 X 3/8	3/8	9.52	.47	11.94	.28	7.10	5/8	.62	15.75	.38	9.65	.66	16.80	1.48	37.60	1.19	30.23
768LW_ 1/2 X 1/2	1/2	12.70	.47	11.94	.41	10.40	13/16	.75	19.05	.50	12.70	.90	22.90	1.62	41.15	1.22	31.00
768LW_ 3/4 X 3/4	3/4	19.05	.47	11.94	.62	15.80	1 1/16	1.05	26.67	.56	14.20	.96	24.40	1.71	43.43	1.31	33.28
768LW_ 1 X 1	1	25.40	.56	14.22	.88	22.35	1 3/8	1.36	34.54	.75	19.05	1.23	31.20	2.07	52.58	1.59	40.40


Designation: Marking LW on Hex.

"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

768 LSF

SANITARY FLANGE

LET-LOK TO SANITARY CLAMP FLANGE

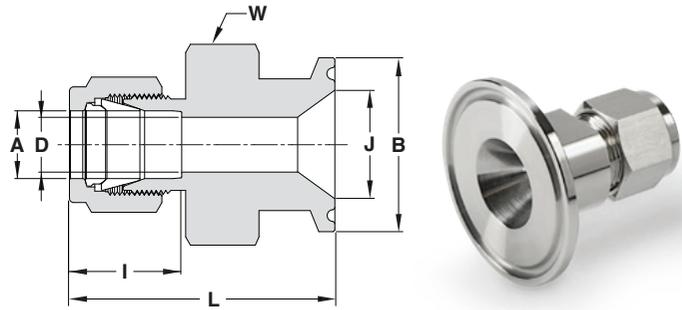


FOR HYGIENIC SEALING AND LET-LOK FERRULE CONNECTION TO METAL TUBES

Ordering Information	A Tube O.D.		Flange size	B		J		D		W	L		I	
	inch	mm		inch	inch	mm	inch	mm	inch		mm	inch	mm	inch
768LSF SS 1/4 X 1/2	1/4	6.35	1/2	0.98	24.90	0.37	9.40	0.19	4.82	1	1.57	39.90	0.60	15.2
768LSF SS 1/4 X 3/4	1/4	6.35	3/4	0.98	24.90	0.62	15.70	0.19	4.82	1	1.57	39.90	0.60	15.2
768LSF SS 1/4 X 1	1/4	6.35	1	1.98	50.30	0.87	22.10	0.19	4.82	1-3/8	1.57	39.90	0.60	15.2
768LSF SS 1/4 X 1-1/2	1/4	6.35	1-1/2	1.98	50.30	1.37	34.80	0.19	4.82	1-3/8	1.57	39.90	0.60	15.2
768LSF SS 3/8 X 1/2	3/8	9.52	1/2	0.98	24.90	0.37	9.40	0.28	7.11	1	1.63	41.40	0.66	16.8
768LSF SS 3/8 X 3/4	3/8	9.52	3/4	0.98	24.90	0.62	15.70	0.28	7.11	1	1.63	41.40	0.66	16.8
768LSF SS 3/8 X 1	3/8	9.52	1	1.98	50.30	0.87	22.10	0.28	7.11	1-3/8	1.63	41.40	0.66	16.8
768LSF SS 3/8 X 1-1/2	3/8	9.52	1-1/2	1.98	50.30	1.37	34.80	0.28	7.11	1-3/8	1.63	41.40	0.66	16.8
768LSF SS 1/2 X 1/2	1/2	12.70	1/2	0.98	24.90	0.37	9.40	0.37	9.40	1	1.74	44.20	0.90	22.9
768LSF SS 1/2 X 3/4	1/2	12.70	3/4	0.98	24.90	0.62	15.70	0.41	10.41	1	1.74	44.20	0.90	22.9
768LSF SS 1/2 X 1	1/2	12.70	1	1.98	50.30	0.87	22.10	0.41	10.41	1-3/8	1.74	44.20	0.90	22.9
768LSF SS 1/2 X 1-1/2	1/2	12.70	1-1/2	1.98	50.30	1.37	34.80	0.41	10.41	1-3/8	1.74	44.20	0.90	22.9
768LSF SS 1 X 1	1	25.40	1	1.98	50.30	0.87	22.10	0.88	22.35	1-3/8	1.92	48.80	1.23	31.2
768LSF SS 1 X 2	1	25.40	2	2.52	64.00	1.87	47.50	0.88	22.35	2-3/4	2.50	63.50	1.23	31.2

768 LTC

TRI-CLAMP FITTINGS

LET-LOK TO TRI-CLAMP

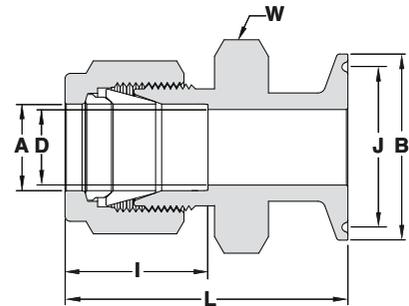


TUBE (INCH) TO TRI-CLAMP

Ordering Information	A Tube O.D.		Tri-Clamp size	B		J		D		W Hex. Flat	L		I	
	inch	mm		inch	inch	mm	inch	mm	inch		mm	inch	mm	
768LTC SS 1/2 X 1/2	1/2	12.7	1/2	1	25.4	0.8	20.3	0.37	9.4	1-1/16	2.1	53.3	0.9	22.9
768LTC SS 3/4 X 3/4	3/4	19.05	3/4	1	25.4	0.8	20.3	0.62	15.8	1-1/16	2.1	53.3	0.96	24.4
768LTC SS 1 X 1	1	25.4	1	1.99	50.5	1.71	43.5	0.87	22.1	2	2.46	62.5	1.23	31.2

Reference Specifications: BS-4825-3

769 L
MALE ELBOW

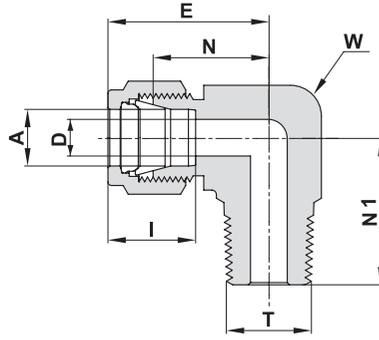


TUBE (METRIC) MALE NPT THREAD

Ordering Information	A	T	D	W		N	E	N1	I
	Tube O.D.	(NPT)	mm	Wrench Flat	mm	mm	mm	mm	mm
	mm	inch	mm	inch	mm	mm	mm	mm	mm
769L_3 X 1/8	3	1/8	2.4	7/16	11.1	17.0	23.6	17.8	12.9
769L_3 X 1/4	3	1/4	2.4	1/2	12.7	18.0	24.6	23.4	12.9
769L_4 X 1/8	4	1/8	2.4	1/2	12.7	18.8	25.4	18.8	13.7
769L_4 X 1/4	4	1/4	2.4	1/2	12.7	18.8	25.4	23.4	13.7
769L_6 X 1/8	6	1/8	4.8	1/2	12.7	19.6	27.0	18.8	15.3
769L_6 X 1/4	6	1/4	4.8	1/2	12.7	19.6	27.0	23.4	15.3
769L_6 X 3/8	6	3/8	4.8	11/16	17.5	22.4	29.8	26.2	15.3
769L_6 X 1/2	6	1/2	4.8	13/16	20.6	24.4	31.8	33.0	15.3
769L_8 X 1/8	8	1/8	4.8	9/16	14.3	21.3	28.8	19.8	16.2
769L_8 X 1/4	8	1/4	6.4	9/16	14.3	21.3	28.8	24.4	16.2
769L_8 X 3/8	8	3/8	6.4	11/16	17.5	23.1	30.6	26.2	16.2
769L_8 X 1/2	8	1/2	6.4	13/16	20.6	25.1	32.6	33.0	16.2
769L_10 X 1/8	10	1/8	4.8	11/16	17.5	23.9	31.5	21.6	17.2
769L_10 X 1/4	10	1/4	7.1	11/16	17.5	23.9	31.5	26.2	17.2
769L_10 X 3/8	10	3/8	7.9	11/16	17.5	23.9	31.5	26.2	17.2
769L_10 X 1/2	10	1/2	7.9	13/16	20.6	25.9	33.5	33.0	17.2
769L_12 X 1/8	12	1/8	4.8	13/16	20.6	25.9	36.0	23.6	22.8
769L_12 X 1/4	12	1/4	7.1	13/16	20.6	25.9	36.0	28.2	22.8
769L_12 X 3/8	12	3/8	9.5	13/16	20.6	25.9	36.0	28.2	22.8
769L_12 X 1/2	12	1/2	9.5	13/16	20.6	25.9	36.0	33.0	22.8
769L_12 X 3/4	12	3/4	9.5	1 1/16	27.0	29.7	39.8	36.8	22.8
769L_15 X 1/2	15	1/2	11.9	15/16	23.8	27.9	38.0	35.1	24.4
769L_16 X 3/8	16	3/8	9.5	15/16	23.8	27.9	38.0	30.2	24.4
769L_16 X 1/2	16	1/2	11.9	15/16	23.8	27.9	38.0	35.1	24.4
769L_16 X 3/4	16	3/4	12.7	1 1/16	27.0	29.7	39.8	36.8	24.4
769L_18 X 1/2	18	1/2	11.9	1 1/16	27.0	29.7	39.8	36.8	24.4
769L_18 X 3/4	18	3/4	15.1	1 1/16	27.0	29.7	39.8	36.8	24.4
769L_20 X 1/2	20	1/2	11.9	1 3/8	34.9	34.5	44.6	41.7	26.0
769L_20 X 3/4	20	3/4	15.9	1 3/8	34.9	34.5	44.6	41.7	26.0
769L_22 X 3/4	22	3/4	15.9	1 3/8	34.9	34.5	44.6	41.7	26.0
769L_22 X 1	22	1	18.3	1 3/8	34.9	34.5	44.6	46.5	26.0
769L_25 X 3/4	25	3/4	15.9	1 3/8	34.9	36.8	49.1	41.7	31.3
769L_25 X 1	25	1	21.8	1 3/8	34.9	36.8	49.1	46.5	31.3
769L_38 X 1 1/2	38 ¹	1 1/2	33.7	-	55.0	56.4	84.0	60.4	49.4

¹ Including low friction paste, (see page 102)

"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

769 L
MALE ELBOW
(CONT'D)

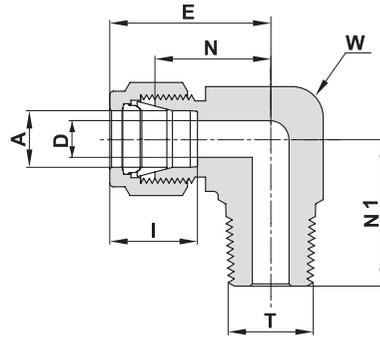


TUBE (INCH) MALE NPT THREAD

Ordering Information	A Tube O.D.		T (NPT)	D		W Wrench Flat		N		E		N1		I	
	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
769L_ 1/16 X 1/16	1/16	1.58	1/16	.05	1.27	7/16	11.1	.60	15.24	.75	19.05	.70	17.78	.34	8.6
769L_ 1/16 X 1/8	1/16	1.58	1/8	.05	1.27	7/16	11.1	.60	15.24	.75	19.05	.70	17.78	.34	8.6
769L_ 1/8 X 1/16	1/8	3.17	1/16	.09	2.28	7/16	11.1	.67	17.02	.93	23.62	.70	17.78	.50	12.7
769L_ 1/8 X 1/8	1/8	3.17	1/8	.09	2.28	7/16	11.1	.67	17.02	.93	23.62	.70	17.78	.50	12.7
769L_ 1/8 X 1/4	1/8	3.17	1/4	.09	2.28	1/2	12.7	.71	18.03	.97	24.64	.92	23.37	.50	12.7
769L_ 3/16 X 1/8	3/16	4.76	1/8	.12	3.04	1/2	12.7	.74	18.80	1.00	25.40	.74	18.80	.54	13.7
769L_ 3/16 X 1/4	3/16	4.76	1/4	.12	3.04	1/2	12.7	.74	18.80	1.00	25.40	.92	23.37	.54	13.7
769L_ 1/4 X 1/16	1/4	6.35	1/16	.12	3.04	1/2	12.7	.77	19.56	1.06	26.92	.74	18.80	.60	15.2
769L_ 1/4 X 1/8	1/4	6.35	1/8	.19	4.82	1/2	12.7	.77	19.56	1.06	26.92	.74	18.80	.60	15.2
769L_ 1/4 X 1/4	1/4	6.35	1/4	.19	4.82	1/2	12.7	.77	19.56	1.06	26.92	.92	23.37	.60	15.2
769L_ 1/4 X 3/8	1/4	6.35	3/8	.19	4.82	11/16	17.5	.88	22.35	1.17	29.71	1.03	26.16	.60	15.2
769L_ 1/4 X 1/2	1/4	6.35	1/2	.19	4.82	13/16	20.6	.96	24.38	1.25	31.75	1.30	33.02	.60	15.2
769L_ 5/16 X 1/8	5/16	7.93	1/8	.19	4.82	9/16	14.3	.84	21.34	1.13	28.70	.78	19.81	.64	16.2
769L_ 5/16 X 1/4	5/16	7.93	1/4	.25	6.35	9/16	14.3	.84	21.34	1.13	28.70	.96	24.38	.64	16.2
769L_ 5/16 X 3/8	5/16	7.93	3/8	.25	6.35	11/16	17.5	.91	23.11	1.20	30.48	1.03	26.16	.64	16.2
769L_ 3/8 X 1/8	3/8	9.52	1/8	.19	4.82	5/8	15.9	.91	23.11	1.20	30.48	.82	20.83	.66	16.8
769L_ 3/8 X 1/4	3/8	9.52	1/4	.28	7.11	5/8	15.9	.91	23.11	1.20	30.48	1.00	25.40	.66	16.8
769L_ 3/8 X 3/8	3/8	9.52	3/8	.28	7.11	11/16	17.5	.94	23.87	1.23	31.24	1.03	26.16	.66	16.8
769L_ 3/8 X 1/2	3/8	9.52	1/2	.28	7.11	13/16	20.6	1.02	25.90	1.31	33.28	1.30	33.02	.66	16.8
769L_ 3/8 X 3/4	3/8	9.52	3/4	.28	7.11	1 1/16	27.0	1.17	29.71	1.46	37.08	1.45	36.83	.66	16.8
769L_ 1/2 X 1/4	1/2	12.70	1/4	.28	7.11	13/16	20.6	1.02	25.90	1.42	36.07	1.11	28.19	.90	22.9
769L_ 1/2 X 3/8	1/2	12.70	3/8	.38	9.50	13/16	20.6	1.02	25.90	1.42	36.07	1.11	28.19	.90	22.9
769L_ 1/2 X 1/2	1/2	12.70	1/2	.41	10.41	13/16	20.6	1.02	25.90	1.42	36.07	1.30	33.02	.90	22.9
769L_ 1/2 X 3/4	1/2	12.70	3/4	.41	10.41	1 1/16	27.0	1.17	29.71	1.57	39.88	1.45	36.83	.90	22.9
769L_ 5/8 X 3/8	5/8	15.87	3/8	.38	9.61	15/16	23.8	1.10	27.94	1.50	38.10	1.19	30.23	.96	24.4
769L_ 5/8 X 1/2	5/8	15.87	1/2	.47	11.94	15/16	23.8	1.10	27.94	1.50	38.10	1.38	35.05	.96	24.4
769L_ 5/8 X 3/4	5/8	15.87	3/4	.50	12.70	1 1/16	27.0	1.17	29.71	1.57	39.88	1.45	36.83	.96	24.4
769L_ 3/4 X 1/2	3/4	19.05	1/2	.47	11.94	1 1/16	27.0	1.17	29.71	1.57	39.88	1.45	36.83	.96	24.4
769L_ 3/4 X 3/4	3/4	19.05	3/4	.62	15.74	1 1/16	27.0	1.17	29.71	1.57	39.88	1.45	36.83	.96	24.4
769L_ 7/8 X 3/4	7/8	22.22	3/4	.62	15.74	1 3/8	34.9	1.36	34.54	1.76	44.70	1.64	41.66	1.02	25.9
769L_ 1 X 3/4	1	25.40	3/4	.62	15.74	1 3/8	34.9	1.45	36.83	1.93	49.02	1.64	41.66	1.23	31.2
769L_ 1 X 1	1	25.40	1	.86	21.84	1 3/8	34.9	1.45	36.83	1.93	49.02	1.83	46.48	1.23	31.2
769L_ 1 1/4 X 1 1/4	1 1/4 ¹	31.75	1 1/4	1.09	27.70	1 11/16	42.9	1.75	44.45	2.62	66.50	1.88	47.75	1.62	41.2
769L_ 1 1/2 X 1 1/2	1 1/2 ¹	38.10	1 1/2	1.34	34.00	2	50.8	2.00	50.80	3.07	78.00	2.38	60.45	1.97	50.0
769L_ 2 X 2	2 ¹	50.80	2	1.81	45.97	2 3/4	69.9	2.75	69.85	4.22	107.19	2.78	70.61	2.66	67.6

¹ Including low friction paste, (see page 102)


"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

769 LA 45°
MALE ELBOW 45°

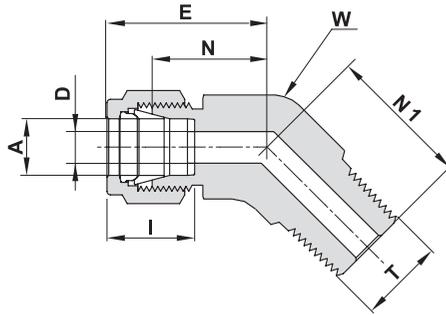

Ordering Information	A Tube O.D.		T (NPT)	D		W Wrench Flat		N		E		N1		I	
	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
769LA SS 3/8 X 1/4	3/8	9.53	1/4	0.28	7.10	13/16	20.63	0.81	20.60	1.10	27.97	0.90	22.86	0.67	16.92
769LA SS 3/8 X 3/8	3/8	9.53	3/8	0.28	7.10	13/16	20.63	0.86	21.80	1.15	29.17	0.95	24.10	0.67	16.92
769LA SS 1/2 X 1/4	1/2	12.70	1/4	0.28	7.10	13/16	20.63	0.86	21.84	1.26	32.00	0.95	24.13	0.90	22.86
769LA SS 1/2 X 3/8	1/2	12.70	3/8	0.37	9.50	13/16	20.63	0.86	21.84	1.26	32.00	0.95	24.13	0.90	22.86

769 LR
MALE ELBOW

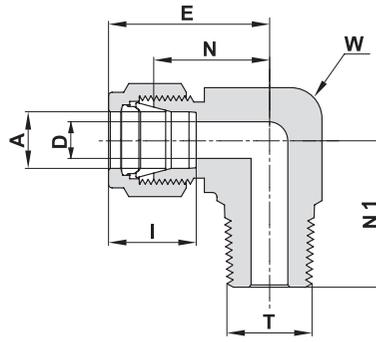

TUBE (METRIC) ISO TAPERED THREAD

Ordering Information	A	T	D	W		N	E	N1	I
	Tube O.D.	(ISO)	mm	inch	mm	mm	mm	mm	mm
769LR_3 X 1/8	3	R-1/8	2.4	7/16	11.1	17.0	23.6	17.8	12.9
769LR_3 X 1/4	3	R-1/4	2.4	1/2	12.7	18.0	24.6	23.4	12.9
769LR_4 X 1/8	4	R-1/8	2.4	1/2	12.7	18.8	25.4	18.8	13.7
769LR_4 X 1/4	4	R-1/4	2.4	1/2	12.7	18.8	25.4	23.4	13.7
769LR_6 X 1/8	6	R-1/8	4.8	1/2	12.7	19.6	27.0	18.8	15.3
769LR_6 X 1/4	6	R-1/4	4.8	1/2	12.7	19.6	27.0	23.4	15.3
769LR_6 X 3/8	6	R-3/8	4.8	11/16	17.5	22.4	29.8	26.2	15.3
769LR_6 X 1/2	6	R-1/2	4.8	13/16	20.6	24.4	31.8	33.0	15.3
769LR_8 X 1/8	8	R-1/8	4.8	9/16	14.3	21.3	28.8	19.8	16.2
769LR_8 X 1/4	8	R-1/4	6.4	9/16	14.3	21.3	28.8	24.4	16.2
769LR_8 X 3/8	8	R-3/8	6.4	11/16	17.5	23.1	30.6	26.2	16.2
769LR_8 X 1/2	8	R-1/2	6.4	13/16	20.6	25.1	32.6	33.0	16.2
769LR_10 X 1/8	10	R-1/8	4.8	11/16	17.5	23.9	31.5	21.6	17.2
769LR_10 X 1/4	10	R-1/4	7.1	11/16	17.5	23.9	31.5	26.2	17.2
769LR_10 X 3/8	10	R-3/8	7.9	11/16	17.5	23.9	31.5	26.2	17.2
769LR_10 X 1/2	10	R-1/2	7.9	13/16	20.6	25.9	33.5	33.0	17.2
769LR_12 X 1/8	12	R-1/8	4.8	13/16	20.6	25.9	36.0	23.6	22.8
769LR_12 X 1/4	12	R-1/4	7.1	13/16	20.6	25.9	36.0	28.2	22.8
769LR_12 X 3/8	12	R-3/8	9.5	13/16	20.6	25.9	36.0	28.2	22.8
769LR_12 X 1/2	12	R-1/2	9.5	13/16	20.6	25.9	36.0	33.0	22.8
769LR_12 X 3/4	12	R-3/4	9.5	1 1/16	27.0	29.7	39.8	36.8	22.8
769LR_14 X 1/2	14	R-1/2	11.0	15/16	23.8	27.9	38.0	35.0	24.4
769LR_15 X 1/2	15	R-1/2	11.9	15/16	23.8	27.9	38.0	35.1	24.4
769LR_16 X 3/8	16	R-3/8	9.5	15/16	23.8	27.9	38.0	30.2	24.4
769LR_16 X 1/2	16	R-1/2	11.9	15/16	23.8	27.9	38.0	35.1	24.4
769LR_18 X 1/2	18	R-1/2	11.9	1 1/16	27.0	29.7	39.8	36.8	24.4
769LR_18 X 3/4	18	R-3/4	15.1	1 1/16	27.0	29.7	39.8	36.8	24.4
769LR_20 X 1/2	20	R-1/2	11.9	1 3/8	34.9	34.5	44.6	41.7	26.0
769LR_20 X 3/4	20	R-3/4	15.9	1 3/8	34.9	34.5	44.6	41.7	26.0
769LR_22 X 3/4	22	R-3/4	15.9	1 3/8	34.9	34.5	44.6	41.7	26.0
769LR_22 X 1	22	R - 1	18.3	1 3/8	34.9	34.5	44.6	46.5	26.0
769LR_25 X 3/4	25	R-3/4	15.9	1 3/8	34.9	36.8	49.1	41.7	31.3
769LR_25 X 1	25	R - 1	21.8	1 3/8	34.9	36.8	49.1	46.5	31.3

Reference Specifications:

- DIN - 2999
- BS - 21
- JIS - B0203
- ISO - 7/1-BSP-T


Designation:

Marking LR on Flat

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

Cont'd next page

769 LR
MALE ELBOW
 (CONT'D)

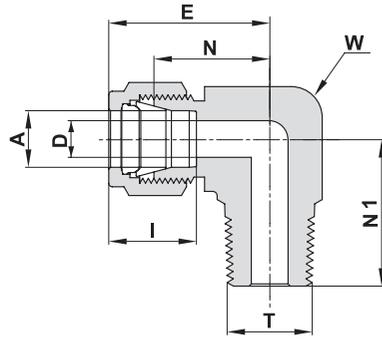

TUBE (INCH) ISO TAPERED THREAD

Ordering Information	A Tube O.D.		T (ISO)	D		W Wrench Flat		N		E		N1		I	
	inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
769LR_ 1/8 X 1/8	1/8	3.17	R-1/8	.09	2.28	7/16	11.1	.67	17.02	.93	23.62	.70	17.78	.50	12.7
769LR_ 1/8 X 1/4	1/8	3.17	R-1/4	.09	2.28	1/2	12.7	.71	18.03	.97	24.64	.92	23.37	.50	12.7
769LR_ 1/4 X 1/8	1/4	6.35	R-1/8	.19	4.82	1/2	12.7	.77	19.56	1.06	26.92	.74	18.80	.60	15.2
769LR_ 1/4 X 1/4	1/4	6.35	R-1/4	.19	4.82	1/2	12.7	.77	19.56	1.06	26.92	.92	23.37	.60	15.2
769LR_ 1/4 X 3/8	1/4	6.35	R-3/8	.19	4.82	11/16	17.5	.88	22.35	1.17	29.71	1.03	26.16	.60	15.2
769LR_ 1/4 X 1/2	1/4	6.35	R-1/2	.19	4.82	13/16	20.6	.96	24.38	1.25	31.75	1.30	33.02	.60	15.2
769LR_ 5/16 X 1/4	5/16	7.93	R-1/4	.25	6.35	9/16	14.3	.84	21.34	1.13	28.70	.96	24.38	.64	16.2
769LR_ 3/8 X 1/8	3/8	9.52	R-1/8	.19	4.82	5/8	15.9	.91	23.11	1.20	30.48	.82	20.83	.66	16.8
769LR_ 3/8 X 1/4	3/8	9.52	R-1/4	.28	7.11	5/8	15.9	.91	23.11	1.20	30.48	1.00	25.40	.66	16.8
769LR_ 3/8 X 3/8	3/8	9.52	R-3/8	.28	7.11	11/16	17.5	.94	23.87	1.23	31.24	1.03	26.16	.66	16.8
769LR_ 1/2 X 1/4	1/2	12.70	R-1/4	.28	7.11	13/16	20.6	1.02	25.90	1.42	36.07	1.11	28.19	.90	22.9
769LR_ 1/2 X 3/8	1/2	12.70	R-3/8	.38	9.50	13/16	20.6	1.02	25.90	1.42	36.07	1.11	28.19	.90	22.9
769LR_ 1/2 X 1/2	1/2	12.70	R-1/2	.41	10.41	13/16	20.6	1.02	25.90	1.42	36.07	1.30	33.02	.90	22.9
769LR_ 3/4 X 1/2	3/4	19.05	R-1/2	.47	11.94	1 1/16	27.0	1.17	29.71	1.57	39.88	1.45	36.83	.96	24.4
769LR_ 1 X 1	1	25.40	R-1	.86	21.84	1 3/8	34.9	1.45	36.83	1.93	49.02	1.83	46.48	1.23	31.2

Reference Specifications:
 DIN - 2999
 BS - 21
 JIS - B0203
 ISO - 7/1-BSP-T


Designation:
 Marking LR on Flat

POSITIONABLES PER SAE

J1926 AND MS 16142

769 LOB

MALE ELBOW POS

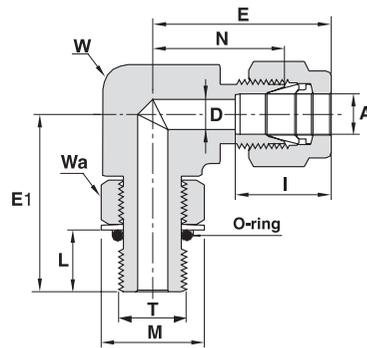


TUBE TO SAE/MS STRAIGHT THREAD BOSS (POSITIONABLE)¹

Ordering Information	A Tube O.D.		T SAE/MS	D		W Wrench Flat		Wa Hex. Flat	N		E		E1		L		M		I		O-ring ²
	inch	mm	inch	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	Dash No.
769LOB SS 1/4 X 7/16-20 POS.	1/4	6.35	7/16-20	.19	4.8	1/2	12.7	9/16	.83	21.10	1.12	28.45	1.12	28.45	.39	9.9	.65	16.5	.60	15.2	-904
769LOB SS 1/4 X 9/16-18 POS.	1/4	6.35	9/16-18	.19	4.8	5/8	15.9	11/16	.91	23.11	1.20	30.48	1.27	32.26	.44	11.2	.79	20.1	.60	15.2	-906
769LOB SS 3/8 X 7/16-20 POS.	3/8	9.52	7/16-20	.20	5.1	5/8	15.9	9/16	.97	24.64	1.26	32.00	1.12	28.45	.39	9.9	.65	16.5	.66	16.8	-904
769LOB SS 3/8 X 9/16-18 POS.	3/8	9.52	9/16-18	.28	7.1	5/8	15.9	11/16	.97	24.64	1.26	32.00	1.27	32.26	.44	11.2	.79	20.1	.66	16.8	-906
769LOB SS 3/8 X 3/4-16 POS.	3/8	9.52	3/4-16	.28	7.1	13/16	20.6	7/8	1.08	27.43	1.37	34.80	1.49	37.85	.50	12.7	1.01	25.7	.66	16.8	-908
769LOB SS 1/2 X 9/16-18 POS.	1/2	12.70	9/16-18	.28	7.1	13/16	20.6	11/16	1.08	27.43	1.48	37.59	1.38	35.05	.44	11.2	.79	20.1	.90	22.9	-906
769LOB SS 1/2 X 3/4-16 POS.	1/2	12.70	3/4-16	.41	10.4	13/16	20.6	7/8	1.08	27.43	1.48	37.59	1.49	37.85	.50	12.7	1.01	25.7	.90	22.9	-908
769LOB SS 3/4 X 1 1/16-12 POS.	3/4	19.05	1 1/16-12	.62	15.8	1 1/16	27.0	1 1/4	1.23	31.24	1.63	41.40	1.92	48.77	.66	16.8	1.44	36.7	.96	24.4	-912
769LOB SS 1 X 1 1/16-12 POS.	1	25.40	1 1/16-12	.62	15.8	1 3/8	34.9	1 1/4	1.51	38.35	1.99	50.55	2.05	52.07	.66	16.8	1.44	36.7	1.23	31.2	-912
769LOB SS 1 X 1 5/16-12 POS.	1	25.40	1 5/16-12	.88	22.3	1 3/8	34.9	1 1/2	1.51	38.35	1.99	50.55	2.11	53.59	.66	16.8	1.73	44.0	1.23	31.2	-916

¹Per SAE J1926 and MS 16142. See page 54 for mounting dimensions.

DIMENSIONS

FOR SAE J1926 & MS 16142 BOSS

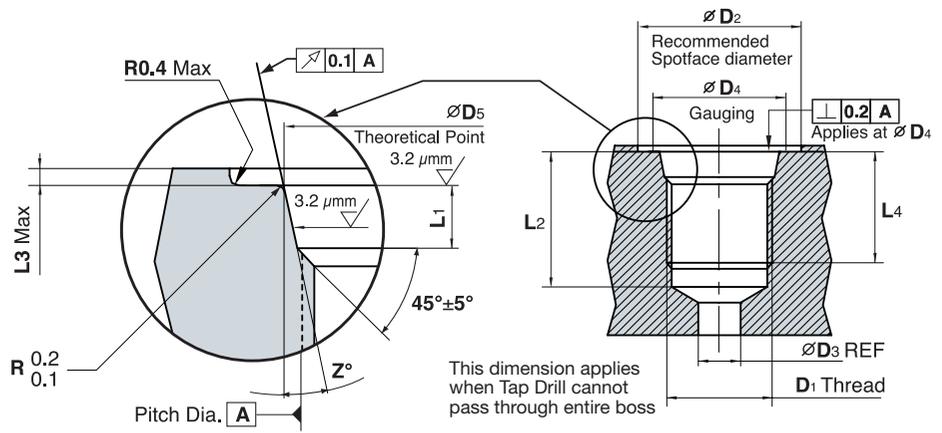

(MOUNTING DIMENSIONS FOR O-SEAL CONNECTORS (SAE/MS)

TUBE O.D.		DI Thread Size	D2 Min Diameter ±0.05	D3 Min Diameter	D4 Min	D5 ±0.05	L1 ±0.20	L2 Min	L3 Max	L4 Min Full Thread	Z° ±1°
inch	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	
1/8	3.17	5/16 - 24 UNF - 2B	17	1.6	11	9.15	2.1	12	1.6	10	12
3/16	4.76	3/8 - 24 UNF - 2B	19	3.5	13	10.75	2.1	12	1.6	10	12
1/4	6.35	7/16 - 20 UNF - 2B	21	4.5	15	12.45	2.6	14	1.6	11.5	12
5/16	7.93	1/2 - 20 UNF - 2B	23	6	16	14.05	2.6	14	1.6	11.5	12
3/8	9.52	9/16 - 18 UNF - 2B	25	7.5	18	15.70	2.7	15.5	1.6	12.7	12
1/2	12.70	3/4 - 16 UNF - 2B	30	10	22	20.65	2.7	17.5	2.4	14.3	15
5/8	15.87	7/8 - 14 UNF - 2B	34	12.5	26	24	2.7	20	2.4	16.7	15
3/4	19.05	1 1/16 - 12 UNF - 2B	41	16	32	29.2	3.5	23	2.4	19	15
7/8	22.22	1 3/16 - 12 UN - 2B	45	18	35	32.4	3.5	23	2.4	19	15
1	25.40	1 5/16 - 12 UN - 2B	49	21	38	35.55	3.5	23	3.2	19	15
1 1/4	31.75	1 5/8 - 12 UN - 2B	58	27	48	43.55	3.5	23	3.2	19	15
1 1/2	38.10	1 7/8 - 12 UN - 2B	65	33	54	49.9	3.5	23	3.2	19	15
2	50.80	2 1/2 - 12 UN - 2B	88	45	70	65.75	3.5	23	3.2	19	15


INSTALLATION INSTRUCTIONS

Figure 1	Figure 2	Figure 3	Figure 4
Locking backed off	Fitting install hand tight	Fittings backed-off for alignment (turn maximum 1)	Fitting locknut tightly to appropriate torque
Lubricate the O-ring by inserting it into the groove adjacent to the face of the metal back-up washer which is assembled at the extreme end of the groove as shown in Figure 1.	Install the fitting into the S.A.E. straight thread boss, Figure 2, until the metal back-up washer contacts the face of the boss as shown in Figure 2.	Position the fitting by turning it counter clockwise up to a maximum of one turn (see Figure 3).	Holding the pad of the fitting with a spanner, tighten the locknut and washer against the face as shown in Figure 4.

Dimensions are for reference only and subject to change without notice.

POSITIONABLES
ISO PARALLEL THREAD

769 LG
MALE ELBOW

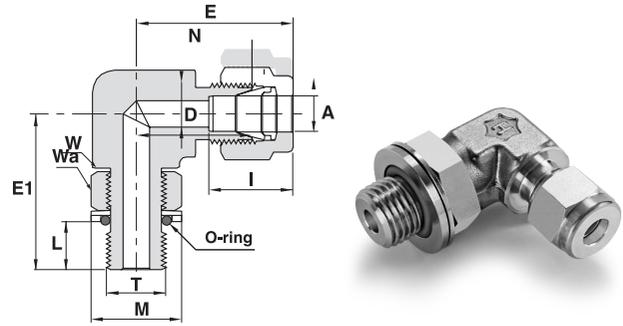

TUBE (METRIC) TO ISO PARALLEL THREAD (POSITIONABLE)¹

Ordering Information	A Tube O.D.		T (ISO)	D		W Wrench Flat		Wa Hex. Flat	N		E	E1	L		M	I	O-ring ²
	mm	inch	inch	mm	inch	mm	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	Dash No.
769LG SS 6 X 1/8 POS.	6		G-1/8-28	4.0	1/2	12.7		9/16	19.6	27.0	26.4	8.1	17.3	15.3			³
769LG SS 6 X 1/4 POS.	6		G-1/4-19	4.8	5/8	15.9		3/4	21.6	29.0	32.2	9.1	22.9	15.3			-111
769LG SS 8 X 1/8 POS.	8		G-1/8-28	4.0	5/8	15.9		9/16	21.3	28.8	27.4	8.1	17.3	16.2			³
769LG SS 8 X 1/4 POS.	8		G-1/4-19	5.9	5/8	15.9		3/4	22.4	29.9	32.2	9.1	22.9	16.2			-111
769LG SS 10 X 1/4 POS.	10		G-1/4-19	5.9	13/16	20.6		3/4	25.9	33.5	35.0	9.1	22.9	17.2			-111
769LG SS 10 X 3/8 POS.	10		G-3/8-19	7.9	13/16	20.6		7/8	25.9	33.5	37.1	9.4	26.4	17.2			-113
769LG SS 12 X 1/4 POS.	12		G-1/4-19	5.9	13/16	20.6		3/4	25.9	36.0	35.0	9.1	22.9	22.8			-111
769LG SS 12 X 3/8 POS.	12		G-3/8-19	7.9	13/16	20.6		7/8	25.9	36.0	37.1	9.4	26.4	22.8			-113
769LG SS 12 X 1/2 POS.	12		G-1/2-14	9.5	15/16	23.8		1 1/16	27.9	38.0	43.4	13.0	32.0	22.8			-593

TUBE (INCH) TO ISO PARALLEL THREAD (POSITIONABLE)¹

Ordering Information	A Tube O.D.		T (ISO)	D		W Wrench Flat		Wa Hex. Flat	N		E	E1	L		M	I	O-ring ²				
	inch	mm	inch	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	Dash No.				
769LG SS 1/4 X 1/8 POS.	1/4	6.35	G-1/8-28	.16	4.0	1/2	12.7	9/16	.77	19.60	1.06	26.9	1.04	26.4	.32	8.1	.68	17.3	.60	15.2	³
769LG SS 1/4 X 1/4 POS.	1/4	6.35	G-1/4-19	.19	4.8	5/8	15.9	3/4	.85	21.60	1.14	28.9	1.27	32.2	.36	9.1	.90	22.9	.60	15.2	-111
769LG SS 1/4 X 1/2 POS.	1/4	6.35	G-1/2-14	.19	4.8	15/16	23.8	1 1/16	.96	24.38	1.25	31.8	1.71	43.4	.51	13.0	1.26	32.0	.60	15.2	-593
769LG SS 3/8 X 1/4 POS.	3/8	9.52	G-1/4-19	.23	5.9	5/8	15.9	3/4	.91	23.11	1.20	30.5	1.27	32.2	.36	9.1	.90	22.9	.66	16.8	-111
769LG SS 3/8 X 3/8 POS.	3/8	9.52	G-3/8-19	.28	7.1	13/16	20.6	7/8	1.02	25.91	1.31	33.3	1.46	37.1	.37	9.4	1.04	26.4	.66	16.8	-113
769LG SS 1/2 X 1/4 POS.	1/2	12.70	G-1/4-19	.23	5.9	13/16	20.6	3/4	1.02	25.91	1.42	36.1	1.27	32.2	.36	9.1	.90	22.9	.90	22.9	-111
769LG SS 1/2 X 3/8 POS.	1/2	12.70	G-3/8-19	.31	7.9	13/16	20.6	7/8	1.02	25.91	1.42	36.1	1.46	37.1	.37	9.4	1.04	26.4	.90	22.9	-113
769LG SS 1/2 X 1/2 POS.	1/2	12.70	G-1/2-14	.41	10.4	15/16	23.8	1 1/16	1.10	27.94	1.50	38.1	1.71	43.4	.51	13.0	1.26	32.0	.90	22.9	-593
769LG SS 5/8 X 1/2 POS.	5/8	15.87	G-1/2-14	.47	11.9	15/16	23.8	1 1/16	1.10	27.94	1.50	38.1	1.71	43.4	.51	13.0	1.26	32.0	.96	24.4	-593


Reference Specifications:
 DIN - ISO 228/1
 BS - 2779
 JIS - B0202
 ISO - 228/1-BSP-P

²O-rings used are Fluorocarbon FKM 90 Durometer. Other O-ring materials are available on request.
³Not standard O-ring size.
¹"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

POSITIONABLES PER SAE

J1926 AND MS 16142

769 LOB 45° MALE ELBOW 45° POS

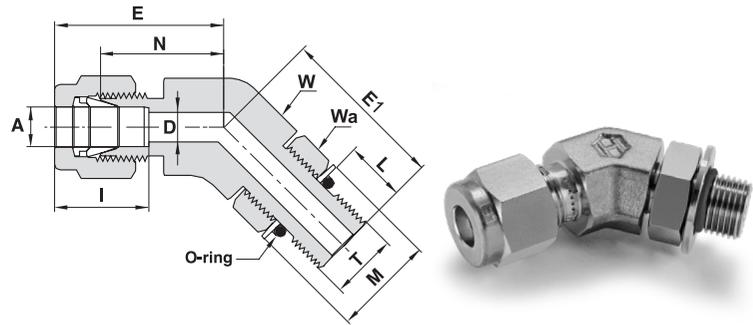

TUBE TO SAE/MS STRAIGHT THREAD BOSS (POSITIONABLE)¹

Ordering Information	A Tube O.D.		T SAE/MS	D		W Wrench Flat		Wa Hex. Flat	N		E		E1		L		M		I	O-ring ²	
	inch	mm	inch	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	Dash No.
769LAOB SS 1/4 X 7/16-20 POS.	1/4	6.35	7/16-20	.19	4.8	9/16	14.3	9/16	.72	18.29	1.01	25.65	1.01	25.65	.39	9.9	.65	16.5	.60	15.2	-904
769LAOB SS 3/8 X 9/16-18 POS.	3/8	9.52	9/16-18	.28	7.1	13/16	20.6	11/16	.81	20.57	1.10	27.94	1.06	27.00	0.40	10.2	.79	20.1	.66	16.8	-906


Reference Specifications:

¹Per SAE J1926 and MS 16142. See page 54 for mounting dimensions.

²Standard O-rings materials are Fluorocarbon FKM 90 Durometer. Other O-ring materials are available upon request.

"D" - Dimension is minimum opening. Dimensions are for reference only, and are subject to change without notice.

769 LG 45° MALE ELBOW 45° POS

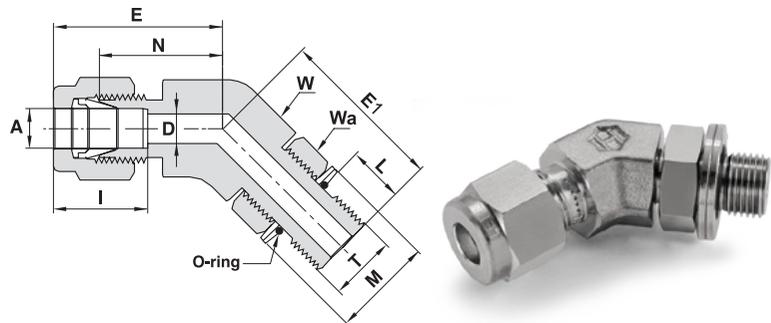

TUBE TO (METRIC) TO ISO PARALEL THREAD (POSITIONABLE)¹

Ordering Information	A Tube O.D.		T (ISO)	D		W Wrench Flat		Wa Hex. Flat	N		E		E1		L		M		I	O-ring ²	
	inch	mm	inch	mm	mm	inch	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Dash No.
769LAG SS 6 X 1/8 POS.		6	G-1/8-28		4.0	9/16	14.3	9/16		17.5		24.9		24.0		8.1		8.1		15.3	³

TUBE TO (INCH) TO ISO PARALEL THREAD (POSITIONABLE)¹

Ordering Information	A Tube O.D.		T (ISO)	D		W Wrench Flat		Wa Hex. Flat	N		E		E1		L		M		I	O-ring ²	
	inch	mm	inch	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	Dash No.
769LAG SS 1/4 X 1/8 POS.	1/4	6.35	G-1/8-28	.16	4.0	9/16	14.3	9/16	.69	17.5	.98	24.0	.94	24.0	.32	8.1	0.68	17.3	.60	15.2	³

Reference Specifications:

DIN - ISO 228/1

BS - 2779

JIS - B0202


ISO - 228/1-BSP-P

²Standard O-rings materials are Fluorocarbon FKM 90 Durometer. Other O-ring materials are available upon request.

³Not standard O-ring size

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

769 LN MALE PIPE WELD ELBOW

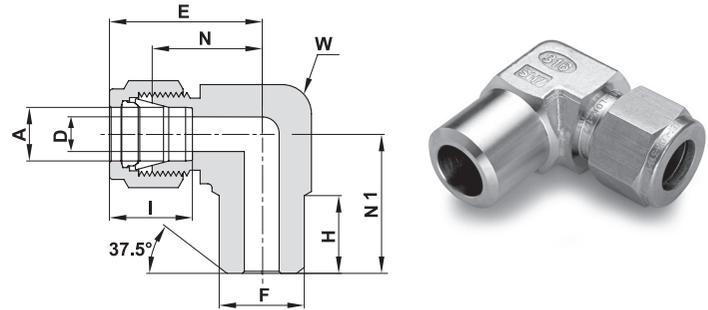


(TUBE (INCH

Ordering Information	A Tube O.D.		F Pipe Size		D		W Wrench Flat		N		H		E		N1		I	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
769LN_ 1/4 X 1/8	1/4	6.35	1/8	10.30	.19	4.82	1/2	12.7	.77	19.56	.38	9.65	1.06	26.92	.74	18.8	.60	15.2
769LN_ 1/4 X 1/4	1/4	6.35	1/4	13.70	.19	4.82	1/2	12.7	.77	19.56	.56	14.22	1.06	26.92	.92	23.37	.60	15.2
769LN_ 3/8 X 1/4	3/8	9.52	1/4	13.70	.28	7.11	5/8	15.9	.91	23.11	.56	14.22	1.20	30.48	1.00	25.40	.66	16.8
769LN_ 1/2 X 1/2	1/2	12.70	1/2	21.34	.41	10.41	13/16	20.6	1.02	25.90	.75	19.05	1.42	36.06	1.30	33.02	.90	22.9
769LN_ 3/4 X 3/4	3/4	19.05	3/4	26.67	.62	15.75	1 1/16	27.0	1.17	29.72	.75	19.05	1.57	39.88	1.45	36.83	.96	24.4

Designation:
Marking LN on Flat

"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

769 LW TUBE SOCKET WELD ELBOW

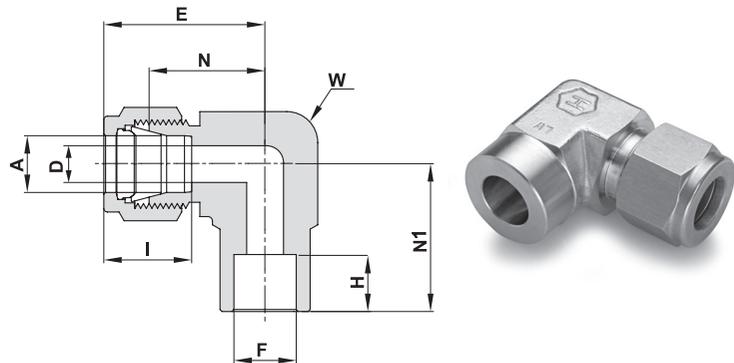


(TUBE (INCH

Ordering Information	A Tube O.D.		F Tube O.D.		D		W Wrench Flat		N		H		E		N1		I	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
769LW_ 1/4 X 1/4	1/4	6.35	1/4	6.35	.19	4.82	1/2	12.7	.77	19.60	.31	7.87	1.06	26.98	.77	19.60	.60	15.2
769LW_ 3/8 X 3/8	3/8	9.52	3/8	9.52	.28	7.11	5/8	15.9	.91	23.11	.38	9.65	1.20	30.98	.91	23.11	.66	16.8
769LW_ 1/2 X 1/2	1/2	12.70	1/2	12.70	.41	10.41	15/16	23.8	1.02	25.90	.50	12.70	1.42	36.06	1.02	25.90	.90	22.9
769LW_ 3/4 X 3/4	3/4	19.05	3/4	19.05	.62	15.74	1 1/16	27.0	1.17	29.71	.56	14.22	1.57	39.87	1.17	29.71	.96	24.4
769LW_ 1 X 1	1	25.40	1	25.40	.88	22.35	1 3/8	34.9	1.45	36.83	.75	19.05	1.93	49.02	1.45	36.83	1.23	31.2

Designation:
Marking LW on flat

769 LT
REDUCING ELBOW

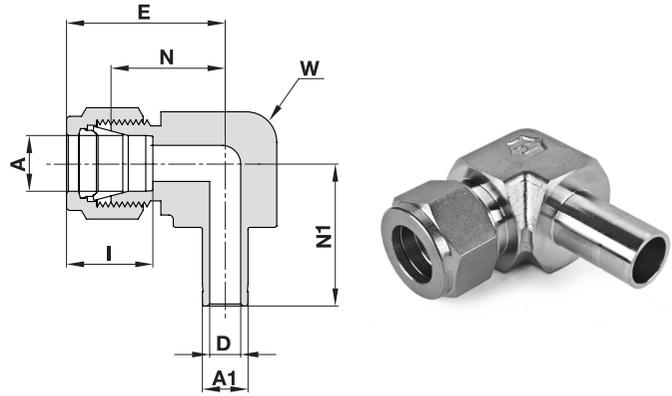


(TUBE (METRIC) TO STUB (METRIC))

Ordering Information	A Tube O.D.		A1 Tube O.D.		D		W Wrench Flat		N		E		N1		I	
	mm	mm	mm	mm	mm	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	
769LT_6 X 6	6	6	6	6	4.0		1/2	12.7	19.6	27.0	23.8	15.3				
769LT_12 X 12	12	12	12	12	8.8		1 1/8	28.6	27.9	38.0	40.4	22.8				
769LT_15 X 15	15	15	15	15	12.0		1 1/8	28.6	27.9	38.0	41.0	24.4				
769LT_22 X 22	22	22	22	22	18.3		1 3/8	34.9	34.5	44.6	50.0	26.0				

(TUBE (INCH) TO STUB (INCH))

Ordering Information	A Tube O.D.		A1 Tube O.D.		D		W Wrench Flat		N		E		N1		I	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
769LT_1/4 X 3/8	1/4	6.35	3/8	9.52	.19	4.82	5/8	15.9	.91	23.1	1.20	30.5	1.24	31.5	.60	15.2
769LT_1/4 X 1/2	1/4	6.35	1/2	12.7	.19	4.82	5/8	15.9	.91	23.1	1.20	30.5	1.28	32.5	.60	15.2

770 L FEMALE ELBOW

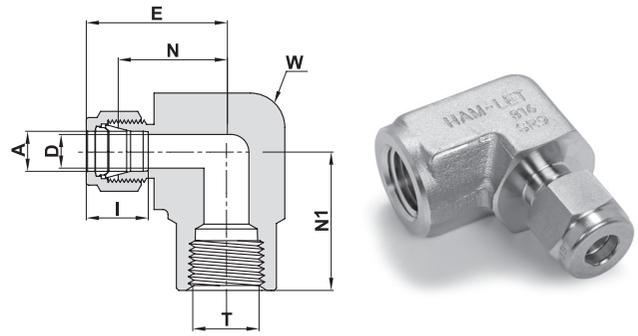

TUBE (METRIC) TO FEMALE NPT THREAD


Ordering Information	A Tube O.D.		T (NPT)	D		W Wrench Flat		N		E		N1		I	
	mm	inch	inch	mm	inch	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm
770L_ 6 X 1/8	6		1/8	4.8		1/2	12.7	19.6		27.0		19.0		15.3	
770L_ 6 X 1/4	6		1/4	4.8		11/16	17.5	22.4		29.8		22.4		15.3	
770L_ 6 X 1/2	6		1/2	4.8		1 1/16	27.0	27.2		34.6		28.4		15.3	
770L_ 8 X 1/4	8		1/4	6.4		11/16	17.5	23.1		30.6		22.4		16.2	
770L_ 10 X 1/8	10		1/8	7.9		11/16	17.5	23.9		31.5		19.0		17.2	
770L_ 10 X 1/4	10		1/4	7.9		13/16	20.6	25.9		33.5		22.4		17.2	
770L_ 12 X 1/4	12		1/4	9.5		13/16	20.6	25.9		36.0		22.4		22.8	
770L_ 12 X 1/2	12		1/2	9.5		1 1/16	27.0	28.7		38.8		28.4		22.8	
770L_ 16 X 1/2	16		1/2	12.7		1 1/16	27.0	29.7		39.8		28.4		24.4	

TUBE (INCH) TO FEMALE NPT THREAD

Ordering Information	A Tube O.D.		T (NPT)	D		W Wrench Flat		N		E		N1		I	
	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
770L_ 1/8 X 1/8	1/8	3.17	1/8	.09	2.28	1/2	12.7	.71	18.03	.97	24.64	.75	19.05	.50	12.7
770L_ 1/8 X 1/4	1/8	3.17	1/4	.09	2.28	11/16	17.5	.82	20.80	1.08	27.43	.88	22.40	.50	12.7
770L_ 3/16 X 1/8	3/16	4.76	1/8	.12	3.04	1/2	12.7	.74	18.80	1.00	25.40	.75	19.05	.54	13.7
770L_ 1/4 X 1/8	1/4	6.35	1/8	.19	4.82	1/2	12.7	.77	19.55	1.06	26.92	.75	19.05	.60	15.2
770L_ 1/4 X 1/4	1/4	6.35	1/4	.19	4.82	11/16	17.5	.88	22.40	1.17	29.72	.88	22.40	.60	15.2
770L_ 1/4 X 3/8	1/4	6.35	3/8	.19	4.82	15/16	23.8	.96	24.38	1.25	31.75	.88	22.40	.60	15.2
770L_ 1/4 X 1/2	1/4	6.35	1/2	.19	4.82	1 1/16	27.0	1.07	27.18	1.36	34.54	1.12	28.45	.60	15.2
770L_ 5/16 X 1/8	5/16	7.93	1/8	.25	6.35	9/16	14.3	.84	21.30	1.13	28.70	.75	19.05	.64	16.2
770L_ 5/16 X 1/4	5/16	7.93	1/4	.25	6.35	11/16	17.5	.91	23.11	1.20	30.48	.88	22.40	.64	16.2
770L_ 3/8 X 1/8	3/8	9.52	1/8	.28	7.11	5/8	15.9	.91	23.11	1.20	30.48	.75	19.05	.66	16.8
770L_ 3/8 X 1/4	3/8	9.52	1/4	.28	7.11	11/16	17.5	0.94	23.87	1.23	31.24	.88	22.40	.66	16.8
770L_ 3/8 X 3/8	3/8	9.52	3/8	.28	7.11	15/16	23.8	1.02	25.90	1.31	33.27	.88	22.40	.66	16.8
770L_ 3/8 X 1/2	3/8	9.52	1/2	.28	7.11	1 1/16	27.0	1.13	28.70	1.42	36.07	1.12	28.45	.66	16.8
770L_ 1/2 X 1/4	1/2	12.70	1/4	.41	10.41	13/16	20.6	1.02	25.90	1.42	36.07	.88	22.40	.90	22.9
770L_ 1/2 X 3/8	1/2	12.70	3/8	.41	10.41	15/16	23.8	1.02	25.90	1.42	36.07	.88	22.40	.90	22.9
770L_ 1/2 X 1/2	1/2	12.70	1/2	.41	10.41	1 1/16	27.0	1.13	28.70	1.53	36.86	1.12	28.45	.90	22.9
770L_ 5/8 X 3/8	5/8	15.87	3/8	.50	12.70	15/16	23.8	1.10	27.90	1.50	38.10	.88	22.40	.96	24.4
770L_ 5/8 X 1/2	5/8	15.87	1/2	.50	12.70	1 1/16	27.0	1.17	29.70	1.57	39.86	1.12	28.45	.96	24.4
770L_ 3/4 X 1/2	3/4	19.05	1/2	.62	15.74	1 1/16	27.0	1.17	29.70	1.57	39.86	1.12	28.45	.96	24.4
770L_ 3/4 X 3/4	3/4	19.05	3/4	.62	15.74	1 3/8	34.9	1.36	34.54	1.76	44.70	1.25	31.75	.96	24.4
770L_ 7/8 X 3/4	7/8	22.22	3/4	.72	18.28	1 3/8	34.9	1.36	34.54	1.76	44.70	1.25	31.75	1.02	25.9
770L_ 1 X 3/4	1	25.40	3/4	.88	22.35	1 3/8	34.9	1.45	36.83	1.93	49.02	1.25	31.75	1.23	31.2
770L_ 1 X 1	1	25.40	1	.88	22.35	1 1/16	42.9	1.63	41.40	2.11	53.59	1.50	38.10	1.23	31.2

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

771L
MALE RUN TEE

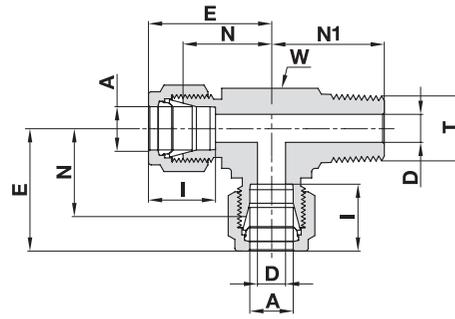

TUBE (METRIC) TO MALE NPT THREAD


Ordering Information	A Tube O.D.		T (NPT)	D		W Wrench Flat		N		E		N1		I	
	mm	inch	inch	mm	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	
771L_ 6 X 1/8	6		1/8	4.8		1/2	12.7	19.6	27.0	18.8	15.3				
771L_ 6 X 1/4	6		1/4	4.8		1/2	12.7	19.6	27.0	23.4	15.3				
771L_ 8 X 1/8	8		1/8	4.8		5/8	15.9	22.4	29.0	20.8	16.2				
771L_ 8 X 1/4	8		1/4	6.4		5/8	15.9	22.4	29.9	25.4	16.2				
771L_ 10 X 1/4	10		1/4	7.1		13/16	20.6	25.9	33.5	28.2	17.2				
771L_ 12 X 1/4	12		1/4	7.1		13/16	20.6	25.9	36.0	28.2	22.8				
771L_ 12 X 3/8	12		3/8	9.5		13/16	20.6	25.9	36.0	28.2	22.8				
771L_ 12 X 1/2	12		1/2	9.5		13/16	20.6	25.9	36.0	33.0	22.8				
771L_ 16 X 1/2	16		1/2	11.9		15/16	23.8	27.9	38.0	35.0	24.4				

TUBE (INCH) TO MALE NPT THREAD

Ordering Information	A Tube O.D.		T (NPT)	D		W Wrench Flat		N		E		N1		I	
	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
771L_ 1/8 X 1/8	1/8	3.17	1/8	.09	2.28	7/16	11.1	.67	17.02	.93	23.62	.70	17.78	.50	12.7
771L_ 1/8 X 1/4	1/8	3.17	1/4	.09	2.28	1/2	12.7	.71	18.03	.97	24.64	.92	23.40	.50	12.7
771L_ 3/16 X 1/8	3/16	4.76	1/8	.12	3.05	7/16	11.1	.70	17.78	.96	24.38	.70	17.78	.54	13.7
771L_ 1/4 X 1/8	1/4	6.35	1/8	.19	4.82	1/2	12.7	.77	19.56	1.06	26.92	.74	18.8	.60	15.2
771L_ 1/4 X 1/4	1/4	6.35	1/4	.19	4.82	1/2	12.7	.77	19.56	1.06	26.92	.92	23.37	.60	15.2
771L_ 5/16 X 1/8	5/16	7.93	1/8	.19	4.82	5/8	15.9	.88	22.35	1.17	29.71	.82	20.83	.64	16.2
771L_ 3/8 X 1/4	3/8	9.52	1/4	.28	7.11	5/8	15.9	.91	23.11	1.20	30.48	1.00	25.40	.66	16.8
771L_ 3/8 X 3/8	3/8	9.52	3/8	.28	7.11	13/16	20.6	1.02	25.91	1.31	33.27	1.11	28.19	.66	16.8
771L_ 1/2 X 3/8	1/2	12.70	3/8	.38	9.5	13/16	20.6	1.02	25.91	1.42	36.07	1.11	28.19	.90	22.9
771L_ 1/2 X 1/2	1/2	12.70	1/2	.41	10.41	13/16	20.6	1.02	25.91	1.42	36.07	1.30	33.00	.90	22.9
771L_ 5/8 X 1/2	5/8	15.87	1/2	.47	11.94	15/16	23.8	1.10	27.94	1.50	38.1	1.38	35.05	.96	24.4
771L_ 3/4 X 3/4	3/4	19.05	3/4	.62	15.75	1 1/16	27.0	1.17	29.72	1.57	39.88	1.45	36.83	.96	24.4

POSITIONABLES
PER SAE J1926 AND MS 16142

771 LOB
MALE RUN TEE POS

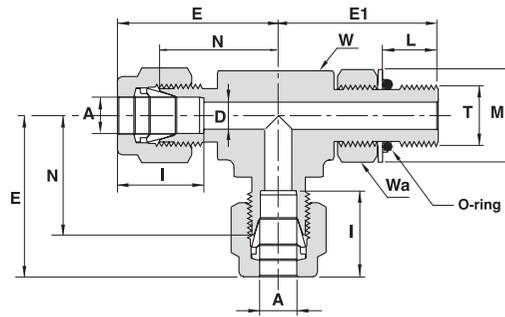


TUBE TO SAE/MS STRAIGHT THREAD BOSS (POSITIONABLE)¹

Ordering Information	A Tube O.D.		T SAE/MS	D		W Wrench Flat		Wa Hex. Flat	N		E		E1		L		M		I	O-ring ²	
	inch	mm	inch	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	Dash No.
771LOB SS 1/4 X 7/16-20 POS.	1/4	6.35	7/16-20	.19	4.8	1/2	12.7	9/16	.83	21.10	1.12	28.45	1.12	28.45	.39	9.9	.65	16.5	.60	15.2	-904
771LOB SS 3/8 X 9/16-18 POS.	3/8	9.52	9/16-18	.28	7.1	5/8	15.9	11/16	.97	24.64	1.26	32.00	1.27	32.26	.44	11.2	.79	20.1	.66	16.8	-906

¹Per SAE J1926 and MS 16142. (See page 54) for mounting dimensions.
²O-rings used are Fluorocarbon FKM 90 Durometer. Other O-ring materials are available on request.

771 LG
MALE RUN TEE POS

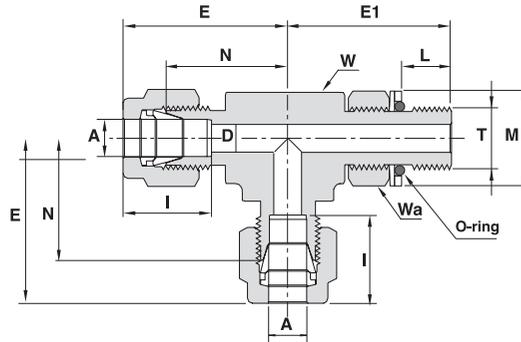

TUBE (METRIC) TO ISO PARALLEL THREAD (POSITIONABLE)¹

Ordering Information	A Tube O.D.		T (ISO)	D		W Wrench Flat		Wa Hex. Flat	N		E		E1		L		M		I	O-ring ²	
	mm	mm	inch	mm	mm	inch	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Dash No.	
771LG SS 6 X 1/8 POS.	6	6	G-1/8-28	4.0	4.0	1/2	12.7	9/16	19.6	19.6	27.0	26.4	26.4	8.1	8.1	17.3	17.3	15.3		³	
771LG SS 6 X 1/4 POS.	6	6	G-1/4-19	4.8	4.8	5/8	15.9	3/4	21.6	21.6	29.0	32.2	32.2	9.1	9.1	22.9	22.9	15.3		-111	
771LG SS 8 X 1/4 POS.	8	8	G-1/4-19	5.9	5.9	5/8	15.9	3/4	22.4	22.4	29.9	32.2	32.2	9.1	9.1	22.9	22.9	16.2		-111	
771LG SS 10 X 1/4 POS.	10	10	G-1/4-19	5.9	5.9	15/16	23.8	3/4	25.9	25.9	33.5	35.0	35.0	9.1	9.1	22.9	22.9	17.2		-111	


TUBE (INCH) TO ISO PARALLEL THREAD (POSITIONABLE)¹

Ordering Information	A Tube O.D.		T (ISO)	D		W Wrench Flat		Wa Hex. Flat	N		E		E1		L		M		I	O-ring ²	
	inch	mm	inch	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	Dash No.
771LG SS 1/4 X 1/8 POS.	1/4	6.35	G-1/8-28	.16	4.0	1/2	12.7	9/16	.77	19.6	1.06	26.9	1.04	26.4	.32	8.1	.68	17.3	.60	15.2	³
771LG SS 1/4 X 1/4 POS.	1/4	6.35	G-1/4-19	.19	4.8	5/8	15.9	3/4	.85	21.6	1.14	28.9	1.27	32.2	.36	9.1	.90	22.9	.60	15.2	-111
771LG SS 3/8 X 1/4 POS.	3/8	9.52	G-1/4-19	.23	5.9	5/8	15.9	3/4	.91	23.1	1.20	30.5	1.27	32.2	.36	9.1	.90	22.9	.66	16.8	-111

Reference Specifications:
DIN - ISO 228/1
BS - 2779
JIS - B0202
ISO - 228/1-BSP-P

²Standard O-rings materials are Fluorocarbon FKM 90 Durometer. Other O-ring materials available upon request.
³Not standard O-ring size.
¹"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

771 LF FEMALE RUN TEE

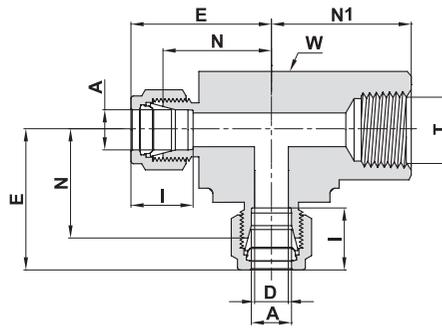

TUBE (METRIC) TO FEMALE NPT THREAD


Ordering Information	A Tube O.D.		T (NPT)	D		W Wrench Flat		N		E		N1		I
	mm	inch	inch	mm	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm
771LF_6 X 1/8	6		1/8	4.8		5/8	15.9	19.6		27.0		19.0		15.3
771LF_6 X 1/4	6		1/4	4.8		13/16	20.6	22.4		29.8		22.4		15.3
771LF_8 X 1/8	8		1/8	6.4		5/8	15.9	22.4		29.9		22.4		16.2
771LF_8 X 1/4	8		1/4	6.4		13/16	20.6	23.1		30.6		22.4		16.2
771LF_10 X 1/4	10		1/4	7.9		13/16	20.6	25.9		33.5		22.4		17.2
771LF_12 X 1/4	12		1/4	9.5		13/16	20.6	25.9		36.0		22.4		22.8
771LF_12 X 3/8	12		3/8	9.5		15/16	23.8	25.9		36.0		22.4		22.8
771LF_12 X 1/2	12		1/2	9.5		1 1/16	27.0	29.7		39.8		28.4		22.8
771LF_16 X 1/2	16		1/2	12.7		1 1/16	27.0	29.7		39.8		28.4		24.4

TUBE (INCH) TO FEMALE NPT THREAD

Ordering Information	A Tube O.D.		T (NPT)	D		W Wrench Flat		N		E		N1		I	
	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
771LF_1/8 X 1/8	1/8	3.17	1/8	.09	2.28	5/8	15.9	.71	18.00	.97	24.63	.75	19.05	.50	12.7
771LF_1/4 X 1/8	1/4	6.35	1/8	.19	4.82	5/8	15.9	.77	19.55	1.06	26.92	.75	19.05	.60	15.2
771LF_1/4 X 1/4	1/4	6.35	1/4	.19	4.82	13/16	20.6	.88	22.35	1.17	29.71	.88	22.35	.60	15.2
771LF_3/8 X 1/4	3/8	9.52	1/4	.28	7.11	13/16	20.6	.94	23.87	1.23	31.24	.88	22.35	.66	16.8
771LF_1/2 X 3/8	1/2	12.70	3/8	.41	10.41	15/16	23.8	1.02	25.9	1.42	36.07	.88	22.35	.90	22.9
771LF_1/2 X 1/2	1/2	12.70	1/2	.41	10.41	1 1/16	27.0	1.17	29.72	1.57	39.88	1.12	28.45	.90	22.9
771LF_3/4 X 3/4	3/4	19.05	3/4	.62	15.75	1 3/8	34.9	1.36	34.54	1.76	44.70	1.25	31.75	.96	24.4
771LF_1 X 3/4	1	25.4	3/4	.88	22.35	1 3/8	34.9	1.45	36.83	1.93	49.02	1.25	31.75	1.23	31.2
771LF_1 X 1	1	25.4	1	.88	22.35	1 11/16	42.9	1.63	41.40	2.11	53.59	1.50	38.10	1.23	31.2

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

772 L
MALE BRANCH TEE

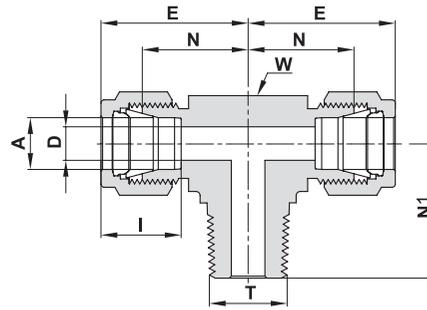

TUBE (METRIC) TO MALE NPT THREAD


Ordering Information	A Tube O.D.		T (NPT)	D		W Wrench Flat		N		E		N1		I
	mm	mm	inch	mm	mm	inch	mm							
772L_6 X 1/8	6	6	1/8	4.8	4.8	1/2	12.7	19.6	19.6	27.0	27.0	18.8	18.8	15.3
772L_6 X 1/4	6	6	1/4	4.8	4.8	1/2	12.7	19.6	19.6	27.0	27.0	23.4	23.4	15.3
772L_8 X 1/8	8	8	1/8	4.8	4.8	5/8	15.9	22.4	22.4	29.9	29.9	20.8	20.8	16.2
772L_8 X 1/4	8	8	1/4	6.4	6.4	5/8	15.9	22.4	22.4	29.9	29.9	25.4	25.4	16.2
772L_10 X 1/4	10	10	1/4	7.1	7.1	13/16	20.6	25.9	25.9	33.5	33.5	28.2	28.2	17.2
772L_12 X 1/4	12	12	1/4	7.1	7.1	13/16	20.6	25.9	25.9	36.0	36.0	28.2	28.2	22.8
772L_12 X 3/8	12	12	3/8	9.5	9.5	13/16	20.6	25.9	25.9	36.0	36.0	28.2	28.2	22.8
772L_12 X 1/2	12	12	1/2	9.5	9.5	13/16	20.6	25.9	25.9	36.0	36.0	33.0	33.0	22.8
772L_16 X 1/2	16	16	1/2	11.9	11.9	15/16	23.8	28.7	28.7	38.8	38.8	35.8	35.8	24.4

TUBE (INCH) TO MALE NPT THREAD

Ordering Information	A Tube O.D.		T (NPT)	D		W Wrench Flat		N		E		N1		I	
	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
772L_1/8 X 1/8	1/8	3.17	1/8	.09	2.28	7/16	11.1	.67	17.02	.93	23.62	.70	17.78	.50	12.7
772L_1/8 X 1/4	1/8	3.17	1/4	.09	2.28	1/2	12.7	.71	18.03	.97	24.64	.92	23.37	.50	12.7
772L_3/16 X 1/8	3/16	4.76	1/8	.12	3.04	7/16	11.1	.70	17.78	.96	24.38	.70	17.78	.54	13.7
772L_1/4 X 1/8	1/4	6.35	1/8	.19	4.82	1/2	12.7	.77	19.56	1.06	26.92	.74	18.80	.60	15.2
772L_1/4 X 1/4	1/4	6.35	1/4	.19	4.82	1/2	12.7	.77	19.56	1.06	26.92	.92	23.37	.60	15.2
772L_5/16 X 1/8	5/16	7.93	1/8	.19	4.82	5/8	15.9	.88	22.35	1.17	29.71	.82	20.83	.64	16.2
772L_3/8 X 1/4	3/8	9.52	1/4	.28	7.11	5/8	15.9	.91	23.11	1.20	30.48	1.00	25.40	.66	16.8
772L_3/8 X 3/8	3/8	9.52	3/8	.28	7.11	13/16	20.6	1.02	25.91	1.31	33.27	1.11	28.19	.66	16.8
772L_1/2 X 3/8	1/2	12.70	3/8	.38	9.65	13/16	20.6	1.02	25.91	1.42	36.07	1.11	28.19	.90	22.9
772L_1/2 X 1/2	1/2	12.70	1/2	.41	10.41	13/16	20.6	1.02	25.91	1.42	36.07	1.30	33.02	.90	22.9
772L_5/8 X 1/2	5/8	15.87	1/2	.47	11.94	15/16	23.8	1.13	28.7	1.53	38.86	1.41	35.81	.96	24.4
772L_3/4 X 3/4	3/4	19.05	3/4	.62	15.75	1 1/16	27.0	1.17	29.72	1.57	39.88	1.45	36.83	.96	24.4

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

772 LOB
MALE BRANCH TEE POS

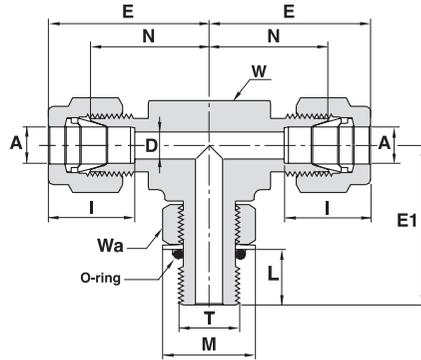

TUBE TO SAE/MS STRAIGHT THREAD BOSS (POSITIONABLE)¹

Ordering Information	A Tube O.D.		T SAE/MS	D		W Wrench Flat		Wa Hex. Flat	N		E		E1		L		M		I	O-ring ²	
	inch	mm	inch	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	Dash No.
772LOB SS 1/4 X 7/16-20 POS.	1/4	6.35	7/16-20	.19	4.8	1/2	12.7	9/16	.83	21.10	1.12	28.45	1.12	28.45	.39	9.9	.65	16.5	.60	15.2	-904
772LOB SS 3/8 X 9/16-18 POS.	3/8	9.52	9/16-18	.28	7.1	5/8	15.9	11/16	.97	24.64	1.26	32.00	1.27	32.26	.44	11.2	.79	20.1	.66	16.8	-906


¹Per SAE J1926 and MS 16142. See page 54 for mounting dimensions.

²Standard O-rings materials are Fluorocarbon FKM 90 Durometer. Other O-ring materials available upon request.

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

POSITIONABLES
ISO PARALLEL THREAD

772 LG
MALE BRANCH
TEE POS

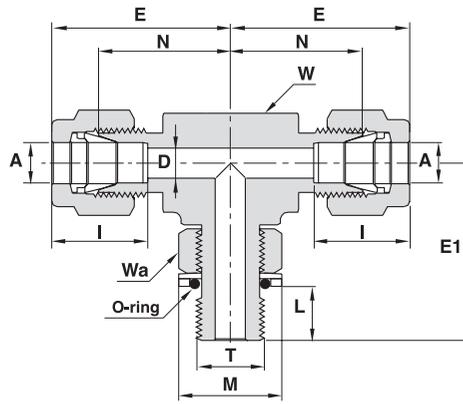

TUBE (METRIC) TO ISO PARALLEL THREAD (POSITIONABLE)¹

Ordering Information	A Tube O.D.		T (ISO)	D		W Wrench Flat		Wa Hex. Flat	N		E		E1		L		M	I	O-ring ²
	mm	inch		mm	inch	mm	inch		mm	inch	mm	inch	mm	inch	mm	inch			mm
772LG SS 6 X 1/8 POS.	6		G-1/8-28	4.0	1/2	12.7	9/16	19.6	27.0	26.4	8.1	17.3	15.3					3	
772LG SS 6 X 1/4 POS.	6		G-1/4-19	4.8	5/8	15.9	3/4	21.6	29.0	32.2	9.1	22.9	15.3					-111	
772LG SS 8 X 1/4 POS.	8		G-1/4-19	5.9	5/8	15.9	3/4	22.4	29.9	32.2	9.1	22.9	16.2					-111	
772LG SS 10 X 1/4 POS.	10		G-1/4-19	5.9	15/16	23.8	3/4	25.9	33.5	35.0	9.1	22.9	17.2					-111	

TUBE (INCH) TO ISO PARALLEL THREAD (POSITIONABLE)¹

Ordering Information	A Tube O.D.		T (ISO)	D		W Wrench Flat		Wa Hex. Flat	N		E		E1		L		M	I	O-ring ²		
	inch	mm		inch	mm	inch	mm		inch	mm	inch	mm	inch	mm	inch	mm			inch	mm	Dash No.
772LG SS 1/4 X 1/8 POS.	1/4	6.35	G-1/8-28	0.16	4.0	1/2	12.7	9/16	0.77	19.6	1.06	26.9	1.04	26.4	0.32	8.1	0.68	17.3	0.60	15.2	3
772LG SS 1/4 X 1/4 POS.	1/4	6.35	G-1/4-19	0.19	4.8	5/8	15.9	3/4	0.85	21.6	1.14	28.9	1.27	32.2	0.36	9.1	0.90	22.9	0.60	15.2	-111
772LG SS 3/8 X 1/4 POS.	3/8	9.52	G-1/4-19	0.23	5.9	5/8	15.9	3/4	0.91	23.1	1.20	30.5	1.27	32.2	0.36	9.1	0.90	22.9	0.66	16.8	-111

Reference Specifications:


DIN - ISO 228/1
BS - 2779
JIS - B0202
ISO - 228/1-BSP-P

²Standard O-rings materials are Fluorocarbon FKM 90 Durometer. Other O-ring materials are available upon request.

³Not standard O-ring size.

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

772 LF
FEMALE BRANCH TEE

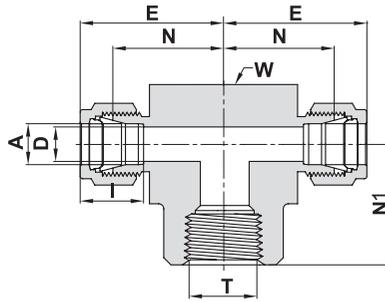

TUBE (METRIC) TO FEMALE NPT THREAD



Ordering Information	A Tube O.D.		T (NPT)	D		W Wrench Flat		N		E		N1		I	
	mm	inch		mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	
772LF _ 6 X 1/8	6		1/8		4.8	5/8	15.9		19.6		27.0		19.0		15.3
772LF _ 6 X 1/4	6		1/4		4.8	13/16	20.6		22.4		29.8		22.4		15.3
772LF _ 8 X 1/8	8		1/8		6.4	5/8	15.9		22.4		29.9		19.0		16.2
772LF _ 8 X 1/4	8		1/4		6.4	13/16	20.6		23.1		30.6		22.4		16.2
772LF _ 10 X 1/4	10		1/4		7.9	13/16	20.6		25.9		33.5		22.4		17.2
772LF _ 10 X 3/8	10		3/8		7.9	15/16	23.8		25.9		33.5		22.4		17.2
772LF _ 12 X 1/4	12		1/4		9.5	13/16	20.6		25.9		36.0		22.4		22.8
772LF _ 12 X 3/8	12		3/8		9.5	15/16	23.8		25.9		36.0		22.4		22.8
772LF _ 12 X 1/2	12		1/2		9.5	1 1/16	27.0		28.7		38.8		28.4		22.8
772LF _ 16 X 1/2	16		1/2		12.7	1 1/16	27.0		28.7		38.8		28.4		24.4

TUBE (INCH) TO FEMALE NPT THREAD

Ordering Information	A Tube O.D.		T (NPT)	D		W Wrench Flat		N		E		N1		I	
	inch	mm		inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
772LF _ 1/8 X 1/8	1/8	3.17	1/8	.09	2.28	5/8	15.9	.70	18.00	.97	24.64	.75	19.05	.50	12.7
772LF _ 1/4 X 1/8	1/4	6.35	1/8	.19	4.82	5/8	15.9	.77	19.56	1.06	26.96	.75	19.05	.60	15.2
772LF _ 1/4 X 1/4	1/4	6.35	1/4	.19	4.82	13/16	20.6	.88	22.35	1.17	29.71	.88	22.35	.60	15.2
772LF _ 3/8 X 1/4	3/8	9.52	1/4	.28	7.11	13/16	20.6	.94	23.88	1.23	31.24	.88	22.35	.66	16.8
772LF _ 3/8 X 3/8	3/8	9.52	3/8	.28	7.11	15/16	23.8	1.02	25.90	1.31	33.27	.88	22.35	.66	16.8
772LF _ 3/8 X 1/2	3/8	9.52	1/2	.28	7.11	1 1/16	27.0	1.13	28.70	1.42	36.07	1.12	28.45	.66	16.8
772LF _ 1/2 X 1/4	1/2	12.70	1/4	.41	10.41	13/16	20.6	1.02	25.90	1.42	36.07	.88	22.35	.90	22.9
772LF _ 1/2 X 3/8	1/2	12.70	3/8	.41	10.41	15/16	23.8	1.02	25.90	1.42	36.07	.88	22.35	.90	22.9
772LF _ 1/2 X 1/2	1/2	12.70	1/2	.41	10.41	1 1/16	27.0	1.13	28.70	1.53	38.86	1.12	28.45	.90	22.9
772LF _ 5/8 X 1/2	5/8	15.87	1/2	.50	12.70	1 1/16	27.0	1.13	28.70	1.53	38.86	1.12	28.44	.96	24.4
772LF _ 3/4 X 3/4	3/4	19.05	3/4	.62	15.74	1 3/8	34.9	1.36	34.50	1.76	44.70	1.25	31.75	.96	24.4
772LF _ 1 X 3/4	1	25.4	3/4	.88	22.35	1 3/8	34.9	1.45	36.83	1.93	49.02	1.25	31.75	1.23	31.2
772LF _ 1 X 1	1	25.4	1	.88	22.35	1 1/16	42.9	1.63	41.40	2.11	53.60	1.50	38.10	1.23	31.2

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

774 L BULKHEAD UNION

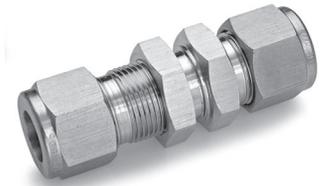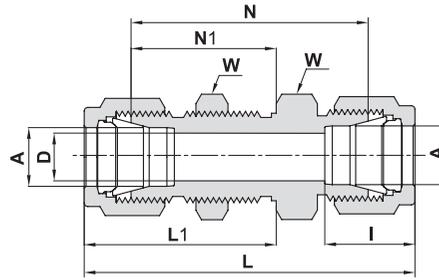

TUBE (METRIC) TO TUBE (METRIC)

Ordering Information	A Tube O.D.		D		W Hex. Flat		N		N1		L		L1		I		Panel Hole Drill Size		Max. Panel Thickness	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
774L_3	3	2.4	14	38.1	24.6	51.3	31.2	12.9	8.30	12.7										
774L_4	4	2.4	14	40.4	25.4	53.6	32.0	13.7	9.90	12.7										
774L_6	6	4.8	16	42.9	26.2	57.7	33.6	15.3	11.50	10.2										
774L_8	8	6.4	18	46.0	28.6	61.0	36.1	16.2	13.10	11.2										
774L_10	10	7.9	22	48.5	29.4	63.7	37.0	17.2	16.25	11.2										
774L_12	12	9.5	24	50.8	31.8	71.0	41.9	22.8	19.50	12.7										
774L_14	14	11.0	27	52.3	32.5	72.5	42.6	24.4	22.80	12.7										
774L_15	15	11.9	27	52.3	32.5	72.5	42.6	24.4	22.80	12.7										
774L_16	16	12.7	27	52.3	32.5	72.5	42.6	24.4	22.80	12.7										
774L_18	18	15.1	30	58.7	37.3	78.9	47.4	24.4	26.00	16.8										
774L_20	20	15.9	35	64.3	42.9	84.5	53.0	26.0	29.00	19.0										
774L_25	25	21.8	41	71.4	45.2	96.0	57.5	31.3	33.70	19.0										
774L_30	30 ¹	26.2	50	80.5	48.6	123.7	70.2	39.6	40.5	19										
774L_32	32 ¹	28.6	50	82.3	49.5	128.3	72.5	42	42.5	19										
774L_38	38 ¹	33.7	60	89.8	51.9	145.0	79.5	49.4	50.50	19.0										


TUBE (INCH) TO TUBE (INCH)

Ordering Information	A Tube O.D.		D		W Hex. Flat		N		N1		L		L1		I		Panel Hole Drill Size		Max. Panel Thickness	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
774L_1/16	1/16	1.58	.05	1.27	5/16	.94	23.88	.53	13.46	1.24	31.5	.68	17.3	.34	8.6	13/64	5.16	.12	3.05	
774L_1/8	1/8	3.17	.09	2.28	1/2	1.50	38.10	.97	24.63	2.02	51.30	1.23	31.24	.50	12.7	21/64	8.33	.50	12.70	
774L_3/16	3/16	4.76	.12	3.04	9/16	1.59	40.38	1.00	25.40	2.11	53.59	1.26	32.00	.54	13.7	25/64	9.92	.50	12.70	
774L_1/4	1/4	6.35	.19	4.82	5/8	1.69	42.92	1.03	26.16	2.27	57.65	1.32	33.52	.60	15.2	29/64	11.50	.40	10.16	
774L_5/16	5/16	7.93	.25	6.35	11/16	1.81	45.97	1.12	28.44	2.39	60.70	1.41	35.81	.64	16.2	33/64	13.09	.44	11.17	
774L_3/8	3/8	9.52	.28	7.11	3/4	1.87	47.5	1.16	29.46	2.45	62.2	1.45	36.83	.66	16.8	37/64	14.68	.44	11.17	
774L_1/2	1/2	12.70	.41	10.41	15/16	2.00	50.80	1.25	31.75	2.80	71.12	1.65	41.91	.90	22.9	49/64	19.44	.50	12.70	
774L_5/8	5/8	15.87	.50	12.70	1 1/16	2.06	52.32	1.28	32.51	2.86	72.64	1.68	42.67	.96	24.4	57/64	22.62	.50	12.70	
774L_3/4	3/4	19.05	.62	15.75	1 3/16	2.31	58.67	1.47	37.33	3.11	78.99	1.87	47.49	.96	24.4	1 1/64	25.79	.66	16.76	
774L_1	1	25.40	.88	22.35	1 5/8	2.81	71.37	1.78	45.21	3.77	95.76	2.26	57.40	1.23	31.2	1 21/64	33.73	.75	19.05	
774L_1 1/4	1 1/4 ¹	31.75	1.09	27.70	1 7/8	3.11	79.00	1.88	47.75	4.85	123.19	2.75	69.85	1.62	41.2	1 41/64	41.67	.75	19.05	
774L_1 1/2	1 1/2 ¹	38.10	1.34	34.00	2 1/4	3.34	84.80	1.94	49.28	5.48	139.19	3.01	76.45	1.97	50.0	1 61/64	49.61	.75	19.05	
774L_2	2 ¹	50.80	1.81	45.97	2 3/4	4.16	105.66	2.22	56.39	7.10	180.34	3.69	93.73	2.66	67.6	2 41/64	67.07	.75	19.05	

¹Including low friction paste (see page 102)

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

774 LF BULKHEAD FEMALE CONNECTOR

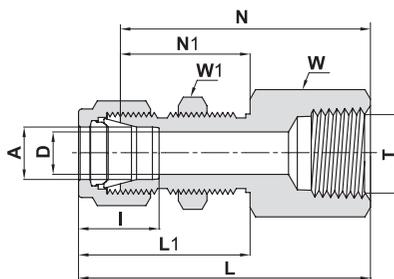


TUBE (METRIC) TO FEMALE NPT THREAD

Ordering Information	A Tube O.D.		T (NPT)	D		W Hex. Flat	W1 Hex. Flat	N		N1		L		L1		I	Panel Hole Drill Size		Max. Panel Thickness	
	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
774LF_6 X 1/4	6	1/4	4.8	19	16	44.4	26.2	51.8	33.6	15.3	11.5	10.2								
774LF_12 X 1/2	12	1/2	9.5	27	24	56.4	31.8	66.5	41.9	22.8	19.5	12.7								

TUBE (INCH) TO FEMALE NPT THREAD

Ordering Information	A Tube O.D.		T (NPT)		D		W Hex. Flat	W1 Hex. Flat	N		N1		L		L1		I	Panel Hole Drill Size		Max. Panel Thickness	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	
774LF_1/8X1/8	1/8	3.17	1/8	.09	2.28	9/16	1/2	1.50	38.10	.97	24.63	1.76	44.70	1.23	31.24	.50	12.7	21/64	8.33	.50	12.70
774LF_1/4X1/8	1/4	6.35	1/8	.19	4.82	5/8	5/8	1.56	39.62	1.03	26.16	1.85	46.99	1.32	33.52	.60	15.2	29/64	11.50	.40	10.16
774LF_1/4X1/4	1/4	6.35	1/4	.19	4.82	3/4	5/8	1.75	44.45	1.03	26.16	2.04	51.81	1.32	33.52	.60	15.2	29/64	11.50	.40	10.16
774LF_3/8X1/4	3/8	9.52	1/4	.28	7.11	3/4	3/4	1.88	47.75	1.16	29.46	2.17	55.11	1.45	36.83	.66	16.8	37/64	14.68	.44	11.17
774LF_1/2X3/8	1/2	12.70	3/8	.41	10.41	15/16	15/16	2.03	51.56	1.25	31.75	2.43	61.72	1.65	41.91	.90	22.9	49/64	19.44	.50	12.70
774LF_1/2X1/2	1/2	12.70	1/2	.41	10.41	1 1/16	15/16	2.22	56.38	1.25	31.75	2.62	66.54	1.65	41.91	.90	22.9	49/64	19.44	.50	12.70

774 LT BULKHEAD REDUCER

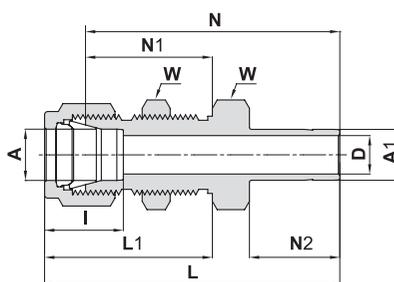


TUBE (INCH) TO TUBE (INCH)

Ordering Information	A Tube O.D.		A1 Tube O.D.	D		W Hex. Flat	N		N1		N2		L		L1		I	Panel Hole Drill Size		Max. Panel Thickness		
	inch	mm	inch	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm		
774LT_1/8X1/8	1/8	3.17	1/8	.08	2.03	1/2	1.69	42.92	.97	24.63	.53	13.46	1.95	49.53	1.23	31.24	.50	12.7	21/64	8.33	.50	12.70
774LT_1/4X1/4	1/4	6.35	1/4	.17	4.20	5/8	1.91	48.50	1.03	26.16	.62	15.74	2.20	55.88	1.32	33.52	.60	15.2	29/64	11.50	.40	10.16
774LT_3/8X3/8	3/8	9.52	3/8	.28	7.11	3/4	2.12	53.85	1.16	29.46	.69	17.52	2.41	61.21	1.45	36.83	.66	16.8	37/64	14.68	.44	11.17
774LT_1/2X1/2	1/2	12.7	1/2	.39	9.90	15/16	2.47	62.73	1.25	31.75	.91	23.11	2.87	72.89	1.65	41.91	.90	22.9	49/64	19.44	.50	12.70
774LT_5/8X5/8	5/8	15.87	5/8	.50	12.70	1 1/16	2.56	65.02	1.28	32.51	.97	24.64	2.96	75.18	1.68	42.67	.96	24.4	57/64	22.62	.50	12.70
774LT_3/4X3/4	3/4	19.05	3/4	.59	15.00	1 3/16	2.81	71.37	1.47	37.33	.97	24.64	3.21	81.53	1.87	47.49	.96	24.4	1 1/64	25.79	.66	16.76
774LT_1X1	1	25.40	1	.80	20.30	1 5/8	3.47	88.14	1.78	45.21	1.30	33.02	3.95	100.33	2.26	57.40	1.23	31.2	1 21/64	33.73	.75	19.05

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

774 LM
BULKHEAD MALE
CONNECTOR

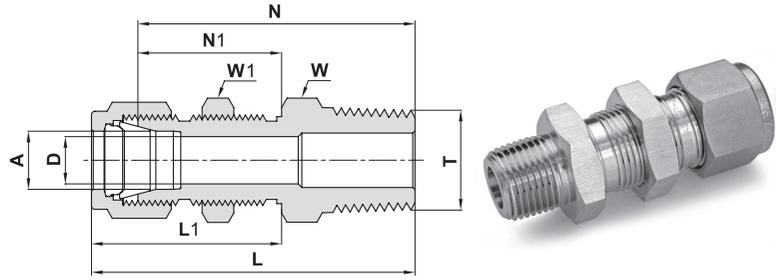


TUBE (METRIC) TO MALE NPT THREAD

Ordering Information	A Tube O.D.		T (NPT)	D		W Hex. Flat	W1 Hex. Flat	N		N1		L		L1	Panel Hole Drill Size		Max. Panel Thickness	
	mm	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
774LM_6 X 1/8	6	6	1/8	4.8	4.8	16	16	42.2	42.2	26.2	26.2	49.6	49.6	33.6	11.5	11.5	10.2	10.2
774LM_6 X 1/4	6	6	1/4	4.8	4.8	16	16	46.2	46.2	26.2	26.2	53.6	53.6	33.6	11.5	11.5	10.2	10.2
774LM_12 X 1/2	12	12	1/2	9.5	9.5	24	24	58.7	58.7	31.8	31.8	68.8	68.8	41.9	19.5	19.5	12.7	12.7

TUBE (INCH) TO MALE NPT THREAD

Ordering Information	A Tube O.D.		T (NPT)	D		W Hex. Flat	W1 Hex. Flat	N		N1		L		L1	Panel Hole Drill Size		Max. Panel Thickness		
	inch	mm	inch	inch	mm	inch	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm		
774LM_1/8 X 1/8	1/8	3.17	1/8	.09	2.28	1/2	1/2	1.57	39.90	.97	24.60	1.83	46.48	1.23	31.24	21/64	8.33	.50	12.70
774LM_1/4 X 1/8	1/4	6.35	1/8	.19	4.82	5/8	5/8	1.66	42.20	1.03	26.20	1.95	49.53	1.32	33.52	29/64	11.50	.40	10.16
774LM_1/4 X 1/4	1/4	6.35	1/4	.19	4.82	5/8	5/8	1.84	46.70	1.03	26.16	2.13	54.10	1.32	33.52	29/64	11.50	.40	10.16
774LM_3/8 X 1/4	3/8	9.52	1/4	.28	7.11	3/4	3/4	1.97	50.00	1.16	29.46	2.26	57.40	1.45	36.83	37/64	14.68	.44	11.17
774LM_3/8 X 3/8	3/8	9.52	3/8	.28	7.11	3/4	3/4	1.97	50.04	1.16	29.46	2.26	57.40	1.45	36.83	37/64	14.68	.44	11.17
774LM_3/8 X 1/2	3/8	9.52	1/2	.28	7.11	7/8	3/4	2.22	56.39	1.16	29.46	2.51	63.75	1.45	36.83	37/64	14.68	.44	11.17
774LM_1/2 X 3/8	1/2	12.70	3/8	.40	10.40	15/16	15/16	2.09	53.10	1.25	31.75	2.49	83.25	1.65	41.91	49/64	19.44	.50	12.70
774LM_1/2 X 1/2	1/2	12.70	1/2	.40	10.40	15/16	15/16	2.31	58.70	1.25	31.70	2.71	68.83	1.65	41.91	49/64	19.44	.50	12.70
774LM_3/4 X 3/4	3/4	19.05	3/4	.62	15.74	1 3/16	1 3/16	2.60	66.04	1.47	37.33	3.00	76.20	1.87	47.49	1 1/64	25.79	.66	16.76
774LM_1 X 1	1	25.4	1	.88	22.35	1 5/8	1 5/8	3.19	81.02	1.78	45.21	3.67	93.21	2.26	57.40	1 21/64	33.73	.75	19.05

775 L
BULKHEAD
REDUCING UNION

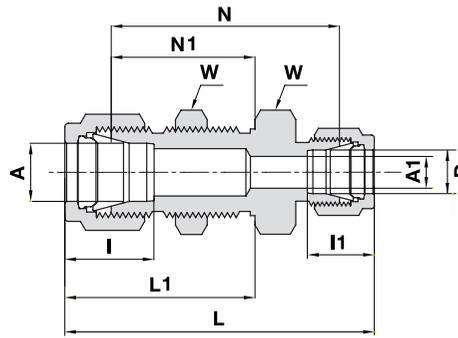


(TUBE (METRIC) TO TUBE (INCH))

Ordering Information	A Tube O.D.		A1 Tube O.D.		D		W Hex. Flat		N		N1		L		L1		I		I1		Panel Hole Drill Size		Max. Panel Thickness	
	mm	inch	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
775L_ 6 X 1/8	6	1/8	2.4	16	41.1	26.2	55.1	33.6	15.3	12.7	11.5	10.2												
775L_ 6 X 1/4	6	1/4	4.8	16	42.9	26.2	57.7	33.6	15.3	15.2	11.5	10.2												
775L_ 12 X 1/2	12	1/2	9.5	24	50.8	31.8	71.1	41.9	22.8	22.9	19.5	12.7												
775L_ 18 X 3/4	18	3/4	15.1	30	58.7	37.3	79.0	47.4	24.4	24.4	26.0	16.8												


(TUBE (INCH) TO TUBE (INCH))

Ordering Information	A Tube O.D.		A1 Tube O.D.		D		W Hex. Flat		N		N1		L		L1		I		I1		Panel Hole Drill Size		Max. Panel Thickness	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
775L_ 1/8 X 1/16	1/8	3.17	1/16	1.58	.05	1.27	1/2	1.44	36.57	.97	24.64	1.85	46.99	1.23	31.24	.50	12.7	.34	8.6	21/64	8.33	.50	12.70	
775L_ 3/16 X 1/4	3/16	4.76	1/4	6.35	.12	3.04	9/16	1.62	41.15	1.00	25.40	2.17	55.12	1.26	32.00	.54	13.7	.60	15.2	25/64	9.92	.50	12.70	
775L_ 1/4 X 1/8	1/4	6.35	1/8	3.17	.09	2.28	5/8	1.62	41.15	1.03	26.16	2.17	55.12	1.32	33.53	.60	15.2	.50	12.7	29/64	11.50	.40	10.16	
775L_ 1/4 X 3/8	1/4	6.35	3/8	9.52	.19	4.82	5/8	1.74	44.20	1.03	26.16	2.61	66.29	1.32	33.53	.60	15.2	.66	16.8	29/64	11.50	.40	10.16	
775L_ 3/8 X 1/4	3/8	9.52	1/4	6.35	.19	4.82	3/4	1.81	45.97	1.16	29.46	2.39	60.71	1.45	36.83	.66	16.8	.60	15.2	37/64	14.68	.44	11.17	
775L_ 1/2 X 1/4	1/2	12.70	1/4	6.35	.19	4.82	15/16	1.94	49.28	1.25	31.75	2.63	66.80	1.65	41.91	.90	22.9	.60	15.2	49/64	19.44	.50	12.70	
775L_ 1/2 X 5/8	1/2	12.70	5/8	15.87	.41	10.41	15/16	2.03	51.56	1.25	31.75	2.83	71.88	1.65	41.91	.90	22.9	.96	24.4	49/64	19.44	.50	12.70	
775L_ 5/8 X 3/8	5/8	15.87	3/8	9.52	.28	7.11	1 1/16	2.06	52.32	1.28	32.51	2.75	69.85	1.68	42.67	.96	24.4	.66	16.8	57/64	22.62	.50	12.70	

774 LSS
BULKHEAD RETAINER

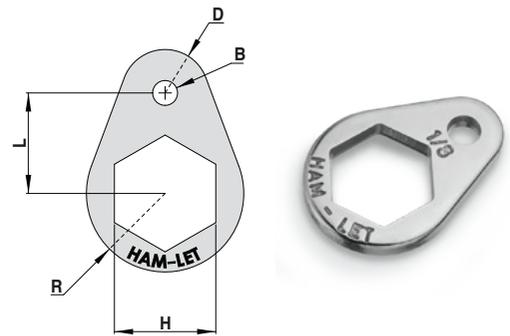


Ordering Information	Fitting Size		H	L	R	D	B	Drill Hole Size	Drill Screw Size
	inch	mm	inch	inch	inch	inch	inch	inch	mm
RETAINER FOR 774L SS 1/8	1/8	-	1/2	1/2	13/32	7/32	5/32	0.12	3.5
RETAINER FOR 774L SS 1/4-6	1/4	6	5/8	5/8	1/2	9/32	5/32	0.12	3.5
RETAINER FOR 774L SS 3/8	3/8	-	3/4	3/4	5/8	11/32	5/32	0.12	3.5

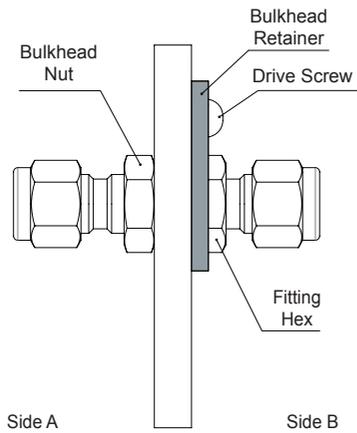

Using Bulkhead Retainer installation can easily be performed by a single installer. The bulkhead retainer holds the fixed body hex stationary, allowing the installer to tighten only the bulkhead lock nut.

7102 L
UNION CROSS

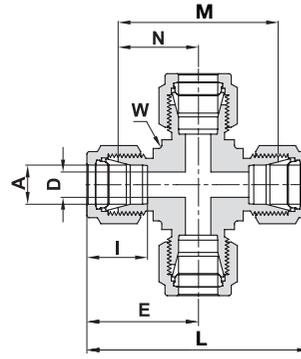

ALL TUBES (METRIC)


Ordering Information	A Tube O.D.		D		W Wrench Flat		N		E		M		L		I	
	mm	mm	mm	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
7102L_3	3	2.4	3/8	9.5	15.7	22.3	31.5	44.7	12.9							
7102L_6	6	4.8	1/2	12.7	19.6	27.0	39.1	53.9	15.3							
7102L_8	8	6.4	5/8	15.9	22.4	29.9	44.7	59.7	16.2							
7102L_10	10	7.9	13/16	20.6	25.9	33.5	51.8	67.0	17.2							
7102L_12	12	9.5	13/16	20.6	25.9	36.0	51.8	72.0	22.8							
7102L_16	16	12.7	15/16	23.8	26.9	37.0	53.8	74.0	24.4							
7102L_18	18	15.1	1 1/16	27.0	28.2	38.3	56.4	76.6	24.4							
7102L_20	20	15.9	1 3/8	34.9	34.5	44.6	69.0	89.3	26.0							
7102L_22	22	18.3	1 3/8	34.9	34.6	44.7	69.1	89.4	26.0							
7102L_25	25	21.8	1 3/8	34.9	36.8	49.1	73.7	98.3	31.3							

ALL TUBES (INCH)

Ordering Information	A Tube O.D.		D		W Wrench Flat		N		E		M		L		I	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
7102L_1/8	1/8	3.17	.09	2.28	3/8	9.5	.62	15.74	.88	22.35	1.24	31.48	1.76	44.70	.50	12.7
7102L_1/4	1/4	6.35	.19	4.82	1/2	12.7	.77	19.56	1.06	26.92	1.54	39.12	2.12	53.84	.60	15.2
7102L_5/16	5/16	7.93	.25	6.35	5/8	15.9	.88	22.35	1.17	29.71	1.76	44.70	2.34	59.42	.64	16.2
7102L_3/8	3/8	9.52	.28	7.11	5/8	15.9	.91	23.11	1.20	30.48	1.82	46.22	2.40	60.96	.66	16.8
7102L_1/2	1/2	12.70	.41	10.41	13/16	20.6	1.02	25.9	1.42	36.07	2.04	51.80	2.84	72.14	.90	22.9
7102L_3/4	3/4	19.05	.62	15.74	1 1/16	27.0	1.17	29.72	1.57	39.88	2.34	59.44	3.14	79.76	.96	24.4
7102L_1	1	25.40	.88	22.35	1 3/8	34.9	1.45	36.8	1.93	49.02	2.90	73.60	3.86	98.04	1.23	31.2

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

**7108 L
CAP**

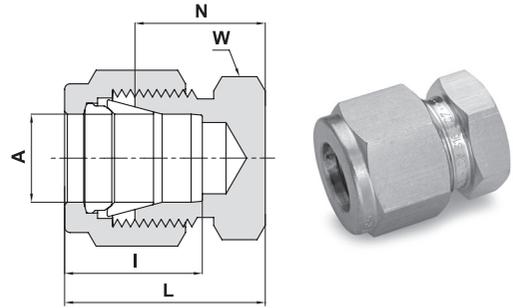

CAPPING END OF TUBE (METRIC)

Ordering Information	A Tube O.D.		W Hex. Flat		N		L		I	
	mm		mm		mm		mm		mm	
7108L_2	2		12		13.5		20.1		12.9	
7108L_3	3		12		13.5		20.1		12.9	
7108L_4	4		12		14.7		21.3		13.7	
7108L_6	6		14		15.7		23.1		15.3	
7108L_8	8		15		17.0		24.5		16.2	
7108L_10	10		18		19.0		26.6		17.2	
7108L_12	12		22		19.0		29.1		22.8	
7108L_14	14		24		19.8		29.9		24.4	
7108L_15	15		24		19.8		29.9		24.4	
7108L_16	16		24		19.8		29.9		24.4	
7108L_18	18		27		21.3		31.4		24.4	
7108L_20	20		30		23.9		34.0		26.0	
7108L_22	22		30		23.9		34.0		26.0	
7108L_25	25		35		26.2		38.5		31.3	
7108L_38	38 ¹		55		37.8		65.4		49.4	


CAPPING END OF TUBE (INCH)

Ordering Information	A Tube O.D.		W Hex. Flat		N		L		I	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
7108L_1/16	1/16	1.58	5/16	12.7	.44	11.17	.59	14.98	.34	8.6
7108L_1/8	1/8	3.17	7/16	17.8	.53	13.46	.79	20.06	.50	12.7
7108L_3/16	3/16	4.76	7/16	17.8	.58	14.73	.84	21.84	.54	13.7
7108L_1/4	1/4	6.35	1/2	12.7	.63	16.00	.92	23.37	.60	15.2
7108L_5/16	5/16	7.93	9/16	14.3	.67	17.01	.96	24.38	.64	16.2
7108L_3/8	3/8	9.52	5/8	15.9	.72	18.28	1.01	26.65	.66	16.8
7108L_1/2	1/2	12.70	13/16	20.6	.75	19.05	1.15	29.21	.90	22.9
7108L_5/8	5/8	15.87	15/16	23.8	.78	19.81	1.18	29.97	.96	24.4
7108L_3/4	3/4	19.05	1 1/16	25.4	.84	21.33	1.24	31.49	.96	24.4
7108L_7/8	7/8	22.22	1 3/16	28.6	.94	23.88	1.34	34.04	1.02	25.9
7108L_1	1	25.40	1 3/8	31.8	1.03	26.16	1.51	38.35	1.23	31.2
7108L_1 1/4	1 1/4 ¹	31.75	1 3/4	38.1	1.23	31.24	2.10	53.34	1.62	41.2
7108L_1 1/2	1 1/2 ¹	38.10	2 1/8	47.6	1.47	37.33	2.54	64.52	1.97	50.0
7108L_2	2 ¹	50.80	2 3/4	63.5	1.94	49.28	3.41	86.61	2.66	67.6

¹Including low friction paste, see page 102

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.


7121 L PLUG

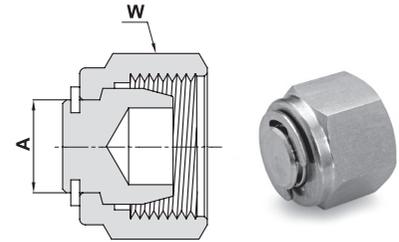

METRIC

Ordering Information	A		W
	mm		Hex. Flat
7121L _ 2	2		14
7121L _ 3	3		12
7121L _ 4	4		12
7121L _ 6	6		14
7121L _ 8	8		16
7121L _ 10	10		19
7121L _ 12	12		22
7121L _ 14	14		25
7121L _ 15	15		25
7121L _ 16	16		25
7121L _ 18	18		30
7121L _ 20	20		32
7121L _ 22	22		32
7121L _ 25	25		38
7121L _ 38	38*		60
7121L _ 50	50*		3 inch

PLUG ASSEMBLY INSTRUCTIONS

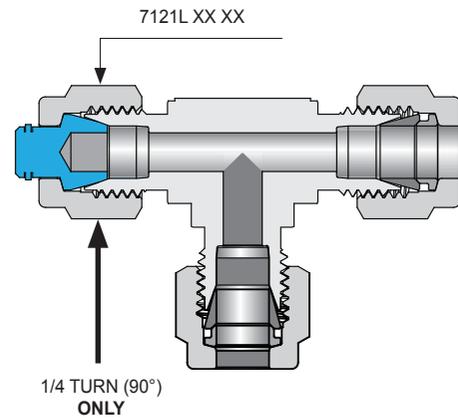

INCH

Ordering Information	A		W
	inch	mm	Hex. Flat
7121L _ 1/16	1/16	1.58	5/16
7121L _ 1/8	1/8	3.17	7/16
7121L _ 3/16	3/16	4.76	1/2
7121L _ 1/4	1/4	6.35	9/16
7121L _ 5/16	5/16	7.93	5/8
7121L _ 3/8	3/8	9.52	11/16
7121L _ 1/2	1/2	12.70	7/8
7121L _ 5/8	5/8	15.87	1
7121L _ 3/4	3/4	19.05	1 1/8
7121L _ 7/8	7/8	22.22	1 1/4
7121L _ 1	1	25.40	1 1/2
7121L _ 1 1/4	1 1/4 ¹	31.75	1 7/8
7121L _ 1 1/2	1 1/2 ¹	38.10	2 1/4
7121L _ 2	2 ¹	50.80	3 inch

¹Including low friction paste, (see page 102)

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

7121 LANYARD

PLUG WITH LANYARD



In order to secure the plug near the relevant fitting, UCT Fluid Solutions provides a plug secured with lanyard/wire, which keeps the plug nearby when not in use.

METRIC


Ordering Information	W Hex Flat
	mm
7121L_3 Secur wire	12
7121L_4 Secur wire	12
7121L_6 Secur wire	14
7121L_8 Secur wire	16
7121L_10 Secur wire	19
7121L_12 Secur wire	22
7121L_14 Secur wire	25
7121L_15 Secur wire	25
7121L_16 Secur wire	25
7121L_18 Secur wire	30
7121L_20 Secur wire	32
7121L_22 Secur wire	32
7121L_25 Secur wire	38

INCH

Ordering Information	W Hex Flat
	inch
7121L_1/8 Secur wire	7/16
7121L_3/16 Secur wire	1/2
7121L_1/4 Secur wire	9/16
7121L_5/16 Secur wire	5/8
7121L_3/8 Secur wire	11/16
7121L_1/2 Secur wire	7/8
7121L_5/8 Secur wire	1
7121L_3/4 Secur wire	1-1/8
7121L_7/8 Secur wire	1-1/4
7121L_1 Secur wire	1-1/2

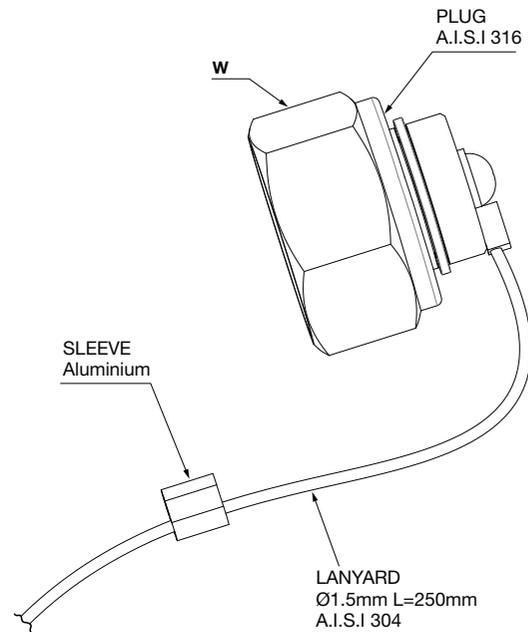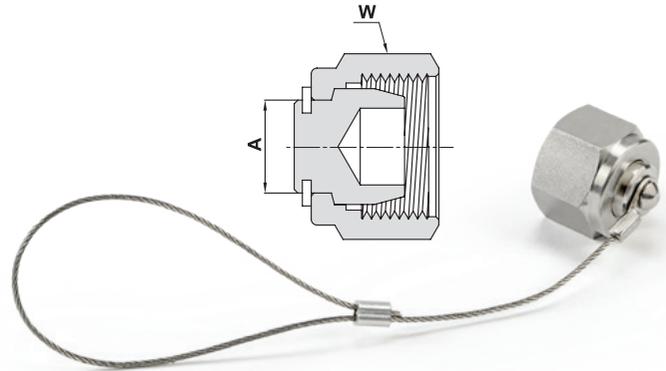

739 LF
FEMALE ADAPTER
TUBE TO PIPE

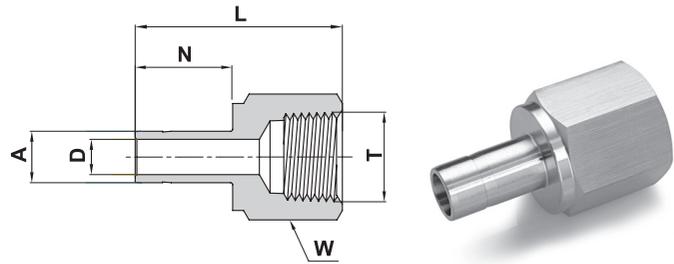


TUBE (METRIC) FEMALE PIPE

Ordering Information	A	T	D	W	N	L
	Tube O.D.	(NPT)		Hex. Flat		
	mm	inch	mm	mm	mm	mm
739LF_3 X 1/8	3	1/8	2.1	14	13.5	31.5
739LF_3 X 1/4	3	1/4	2.1	19	13.5	35.3
739LF_4 X 1/4	4	1/4	2.2	19	14.2	35.0
739LF_6 X 1/8	6	1/8	4.0	14	15.7	32.5
739LF_6 X 1/4	6	1/4	4.0	19	15.7	37.1
739LF_6 X 3/8	6	3/8	4.0	22	15.7	39.6
739LF_6 X 1/2	6	1/2	4.0	27	15.7	45.5
739LF_8 X 1/8	8	1/8	5.6	14	16.8	34.3
739LF_8 X 1/4	8	1/4	5.6	19	16.8	37.6
739LF_8 X 1/2	8	1/2	5.6	27	16.8	46.0
739LF_10 X 1/4	10	1/4	7.1	19	17.5	38.1
739LF_10 X 3/8	10	3/8	7.1	22	17.5	40.1
739LF_10 X 1/2	10	1/2	7.1	27	17.5	46.5
739LF_12 X 1/4	12	1/4	8.8	19	23.1	43.4
739LF_12 X 3/8	12	3/8	8.8	22	23.1	45.5
739LF_12 X 1/2	12	1/2	8.8	27	23.1	52.3
739LF_16 X 3/8	16	3/8	12.7	24	24.7	48.0
739LF_16 X 1/2	16	1/2	12.7	27	24.7	53.1
739LF_20 X 1/2	20	1/2	15.1	27	26.6	56.0
739LF_20 X 3/4	20	3/4	15.1	35	26.6	56.0

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

Cont'd next page

739 LF
FEMALE ADAPTER
TUBE TO PIPE
 (CONT'D)

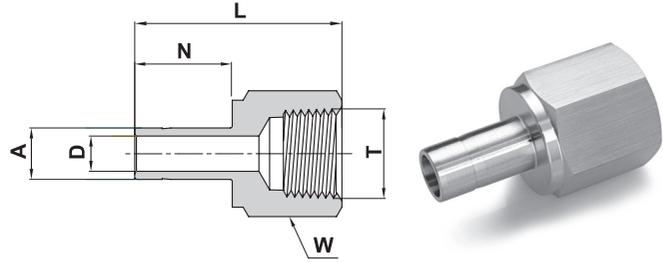


TUBE (INCH) FEMALE PIPE

Ordering Information	A Tube O.D.		T (NPT)	D		W Hex. Flat	N		L	
	inch	mm	inch	inch	mm	inch	inch	mm	inch	mm
739LF_ 1/8 X 1/8	1/8	3.17	1/8	.08	2.0	9/16	.53	13.45	1.24	31.5
739LF_ 1/8 X 1/4	1/8	3.17	1/4	.08	2.0	3/4	.53	13.45	1.39	35.3
739LF_ 3/16 X 1/4	3/16	4.76	1/4	.12	3.0	3/4	.56	14.20	1.41	35.8
739LF_ 1/4 X 1/8	1/4	6.35	1/8	.17	4.2	9/16	.62	15.75	1.30	33.0
739LF_ 1/4 X 1/4	1/4	6.35	1/4	.17	4.2	3/4	.62	15.75	1.46	37.1
739LF_ 1/4 X 3/8	1/4	6.35	3/8	.17	4.2	7/8	.62	15.75	1.55	39.4
739LF_ 1/4 X 1/2	1/4	6.35	1/2	.17	4.2	1 1/16	.62	15.75	1.79	45.5
739LF_ 5/16 X 1/4	5/16	7.93	1/4	.22	5.6	3/4	.66	16.75	1.48	37.6
739LF_ 3/8 X 1/8	3/8	9.52	1/8	.27	6.9	9/16	.69	17.50	1.35	34.3
739LF_ 3/8 X 1/4	3/8	9.52	1/4	.27	6.9	3/4	.69	17.50	1.50	38.1
739LF_ 3/8 X 3/8	3/8	9.52	3/8	.27	6.9	7/8	.69	17.50	1.59	40.4
739LF_ 3/8 X 1/2	3/8	9.52	1/2	.27	6.9	1 1/16	.69	17.50	1.84	46.7
739LF_ 1/2 X 1/4	1/2	12.70	1/4	.37	9.4	3/4	.91	23.10	1.71	43.4
739LF_ 1/2 X 3/8	1/2	12.70	3/8	.37	9.4	7/8	.91	23.10	1.79	45.5
739LF_ 1/2 X 1/2	1/2	12.70	1/2	.37	9.4	1 1/16	.91	23.10	2.05	52.1
739LF_ 5/8 X 1/2	5/8	15.87	1/2	.50	12.7	1 1/16	.97	24.65	2.09	53.1
739LF_ 3/4 X 1/2	3/4	19.05	1/2	.59	15.0	1 1/16	.97	24.65	2.08	52.8
739LF_ 3/4 X 3/4	3/4	19.05	3/4	.59	15.0	1 5/16	.97	24.65	2.16	54.9
739LF_ 3/4 X 1	3/4	19.05	1	.59	15.0	1 5/8	.97	24.65	2.30	58.4
739LF_ 1 X 3/4	1	25.40	3/4	.80	20.3	1 5/16	1.23	31.20	2.39	60.7
739LF_ 1 X 1	1	25.40	1	.80	20.3	1 5/8	1.23	31.20	2.53	64.3
739LF_ 1 1/4 X 1 1/4	1 1/4 ¹	31.75	1 1/4	1.02	25.9	2 1/8	1.73	43.82	3.06	77.7
739LF_ 1 1/2 X 1 1/2	1 1/2 ¹	38.10	1 1/2	1.25	31.8	2 3/8	2.14	54.33	3.50	88.9

¹Supplied assembled with Nut and Ferrules. Including low friction paste (see page 102).

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

739 LM
MALE ADAPTER
TUBE TO PIPE

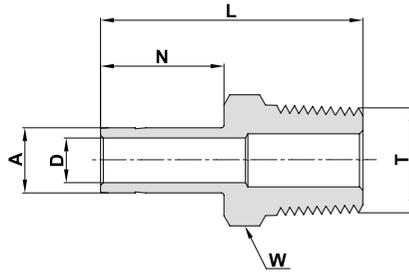


TUBE (METRIC) MALE PIPE

Ordering Information	A Tube O.D.	T (NPT)	D	W Hex. Flat	N	L
	mm	inch	mm	mm	mm	mm
739LM_3 X 1/8	3	1/8	2.1	12	13.5	30.0
739LM_3 X 1/4	3	1/4	2.1	14	13.5	35.3
739LM_6 X 1/8	6	1/8	4.0	12	15.7	32.8
739LM_6 X 1/4	6	1/4	4.0	14	15.7	38.1
739LM_6 X 3/8	6	3/8	4.0	18	15.7	37.0
739LM_6 X 1/2	6	1/2	4.0	22	15.7	43.4
739LM_8 X 1/8	8	1/8	4.8	12	16.8	33.5
739LM_8 X 1/4	8	1/4	5.6	14	16.8	39.1
739LM_8 X 3/8	8	3/8	5.6	11/16 inch	16.8	37.8
739LM_8 X 1/2	8	1/2	5.6	22	16.8	43.0
739LM_10 X 1/4	10	1/4	7.1	9/16 inch	17.5	39.9
739LM_10 X 3/8	10	3/8	7.1	18	17.5	40.6
739LM_10 X 1/2	10	1/2	7.1	22	17.5	46.2
739LM_12 X 1/4	12	1/4	7.1	16	23.1	46.5
739LM_12 X 3/8	12	3/8	8.8	18	23.1	46.5
739LM_12 X 1/2	12	1/2	8.8	22	23.1	52.0
739LM_16 X 1/2	16	1/2	11.9	22	24.7	50.5
739LM_20 X 3/4	20	3/4	15.1	27	26.6	54.3

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

Cont'd next page

739 LM
MALE ADAPTER
TUBE TO PIPE
 (CONT'D)

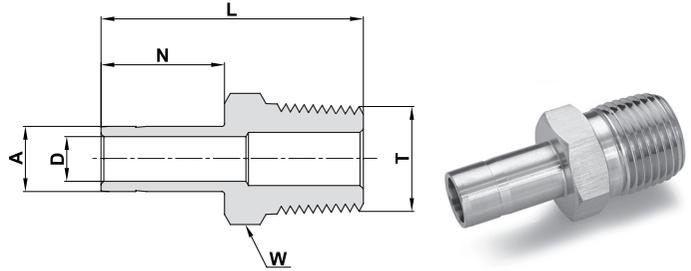


TUBE (INCH) MALE PIPE

Ordering Information	A Tube O.D.		T (NPT)	D		W Hex. Flat	N		L	
	inch	mm	inch	inch	mm	inch	inch	mm	inch	mm
739LM_ 1/8 X 1/8	1/8	3.17	1/8	.08	2.0	7/16	.53	13.45	1.16	29.5
739LM_ 1/8 X 1/4	1/8	3.17	1/4	.08	2.0	9/16	.53	13.45	1.37	34.8
739LM_ 3/16 X 1/8	3/16	4.76	1/8	.12	3.0	7/16	.56	14.20	1.19	30.2
739LM_ 3/16 X 1/4	3/16	4.76	1/4	.12	3.0	9/16	.56	14.20	1.40	35.6
739LM_ 1/4 X 1/8	1/4	6.35	1/8	.17	4.2	7/16	.62	15.75	1.25	31.8
739LM_ 1/4 X 1/4	1/4	6.35	1/4	.17	4.2	9/16	.62	15.75	1.46	37.1
739LM_ 1/4 X 3/8	1/4	6.35	3/8	.17	4.2	11/16	.62	15.75	1.49	37.9
739LM_ 1/4 X 1/2	1/4	6.35	1/2	.17	4.2	7/8	.62	15.75	1.71	43.4
739LM_ 5/16 X 1/8	5/16	7.93	1/8	.22	5.6	7/16	.66	16.75	1.29	32.7
739LM_ 5/16 X 1/4	5/16	7.93	1/4	.22	5.6	9/16	.66	16.75	1.50	38.1
739LM_ 3/8 X 1/8	3/8	9.52	1/8	.27	6.9	7/16	.69	17.50	1.32	33.5
739LM_ 3/8 X 1/4	3/8	9.52	1/4	.27	6.9	9/16	.69	17.50	1.53	38.9
739LM_ 3/8 X 3/8	3/8	9.52	3/8	.27	6.9	11/16	.69	17.50	1.56	39.6
739LM_ 3/8 X 1/2	3/8	9.52	1/2	.27	6.9	7/8	.69	17.50	1.78	45.2
739LM_ 1/2 X 1/4	1/2	12.70	1/4	.28	7.1	9/16	.91	23.10	1.75	44.5
739LM_ 1/2 X 3/8	1/2	12.70	3/8	.37	9.4	11/16	.91	23.10	1.78	45.2
739LM_ 1/2 X 1/2	1/2	12.70	1/2	.37	9.4	7/8	.91	23.10	2.0	50.8
739LM_ 5/8 X 3/8	5/8	15.87	3/8	.37	9.5	11/16	.97	24.65	1.81	47.6
739LM_ 5/8 X 1/2	5/8	15.87	1/2	.47	11.9	7/8	.97	24.65	2.06	52.3
739LM_ 5/8 X 3/4	5/8	15.87	3/4	.50	12.7	1 1/16	.97	24.65	2.06	52.3
739LM_ 3/4 X 1/2	3/4	19.05	1/2	.47	11.9	7/8	.97	24.65	2.06	52.3
739LM_ 3/4 X 3/4	3/4	19.05	3/4	.59	15.0	1 1/16	.97	24.65	2.06	52.3
739LM_ 3/4 X 1	3/4	19.05	1	.59	15.0	1 3/8	.97	24.65	2.28	57.3
739LM_ 7/8 X 3/4	7/8	22.22	3/4	.60	15.9	1 1/16	1.05	26.60	2.09	54.3
739LM_ 1 X 3/4	1	25.40	3/4	.60	15.8	1 1/16	1.30	33.00	2.31	58.7
739LM_ 1 X 1	1	25.40	1	.80	20.3	1 3/8	1.30	33.00	2.60	66.0
739LM_ 1 1/4 X 1 1/4	1 1/4 ¹	31.75	1 1/4	1.02	25.9	1 3/4	1.73	43.82	3.16	80.3
739LM_ 1 1/2 X 1 1/2	1 1/2 ¹	38.10	1 1/2	1.25	31.6	2 1/8	2.14	54.33	3.72	94.5

¹Supplied assembled with Nut and Ferrules. Including low friction paste (see page 102)

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

739 LMR MALE ADAPTER TUBE TO PIPE

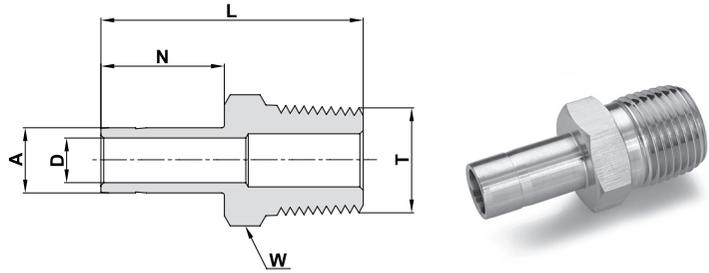

TUBE (METRIC) MALE PIPE

Ordering Information	A Tube O.D.		T (ISO)	D		W Hex. Flat	N		L	
	mm	inch	inch	mm	mm	mm	mm	mm	mm	
739LMR_ 6 X 1/8	6	R-1/8	4.0	12	15.7	32.8				
739LMR_ 6 X 1/4	6	R-1/4	4.0	14	15.7	38.1				
739LMR_ 6 X 1/2	6	R-1/2	4.0	22	15.7	43.4				
739LMR_ 8 X 1/8	8	R-1/8	4.8	12	16.8	33.5				
739LMR_ 8 X 1/4	8	R-1/4	5.6	14	16.8	39.1				
739LMR_ 8 X 3/8	8	R-3/8	5.6	11/16 inch	16.8	37.8				
739LMR_ 10 X 1/4	10	R-1/4	7.1	14	17.5	39.9				
739LMR_ 10 X 3/8	10	R-3/8	7.1	18	17.5	40.6				
739LMR_ 10 X 1/2	10	R-1/2	7.1	22	17.5	46.2				
739LMR_ 12 X 1/4	12	R-1/4	7.1	16	23.1	46.5				
739LMR_ 12 X 3/8	12	R-3/8	8.8	18	23.1	46.2				
739LMR_ 12 X 1/2	12	R-1/2	8.8	22	23.1	52.0				
739LMR_ 20 X 3/4	20	R-3/4	15.1	27	26.6	54.3				

TUBE (INCH) MALE PIPE

Ordering Information	A Tube O.D.		T (ISO)	D		W Hex. Flat	N		L	
	inch	mm	inch	inch	mm	inch	inch	mm	inch	mm
739LMR_ 1/8 X 1/8	1/8	3.17	R-1/8	.08	2.0	7/16	.53	13.45	1.16	29.5
739LMR_ 1/8 X 1/4	1/8	3.17	R-1/4	.08	2.0	9/16	.53	13.45	1.37	34.8
739LMR_ 1/4 X 1/8	1/4	6.35	R-1/8	.17	4.2	7/16	.62	15.75	1.25	31.8
739LMR_ 1/4 X 1/4	1/4	6.35	R-1/4	.17	4.2	9/16	.62	15.75	1.46	37.1
739LMR_ 1/4 X 3/8	1/4	6.35	R-3/8	.17	4.2	11/16	.62	15.75	1.49	37.9
739LMR_ 1/4 X 1/2	1/4	6.35	R-1/2	.17	4.2	7/8	.62	15.75	1.71	43.4
739LMR_ 3/8 X 1/4	3/8	9.52	R-1/4	.27	6.9	9/16	.69	17.50	1.53	38.9
739LMR_ 3/8 X 3/8	3/8	9.52	R-3/8	.27	6.9	11/16	.69	17.50	1.56	39.6
739LMR_ 3/8 X 1/2	3/8	9.52	R-1/2	.27	6.9	7/8	.69	17.50	1.78	45.2
739LMR_ 1/2 X 1/4	1/2	12.70	R-1/4	.28	7.1	9/16	.91	23.10	1.75	44.5
739LMR_ 1/2 X 3/8	1/2	12.70	R-3/8	.37	9.4	11/16	.91	23.10	1.78	45.2
739LMR_ 1/2 X 1/2	1/2	12.70	R-1/2	.37	9.4	7/8	.91	23.10	2.00	50.8
739LMR_ 5/8 X 1/2	5/8	15.87	R-1/2	.47	11.9	7/8	.97	24.65	2.06	52.3
739LMR_ 3/4 X 1/2	3/4	19.05	R-1/2	.47	11.9	7/8	.97	24.65	2.06	52.3
739LMR_ 3/4 X 3/4	3/4	19.05	R-3/4	.59	15.0	1 1/16	.97	24.65	2.06	52.3
739LMR_ 1 X 1	1	25.40	R-1	.80	20.3	1 3/8	1.30	33.00	2.60	66.0

Reference Specifications:


DIN -ISO 2999

BS - 21JIS - B0203ISO - 7/1-BSP-T

55° Thread angle
Truncation of root and crest is round
Taper angle 1°47'


Designation:

Marking LR on Hex

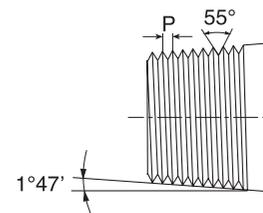

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

739 LMG
MALE ADAPTER
TUBE TO PIPE

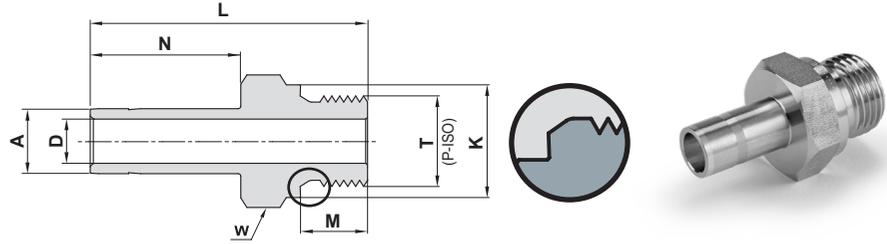


TUBE (METRIC) TO ISO PARALLEL THREAD

Ordering Information	A Tube O.D.		T (ISO)	D	K	W Hex. Flat	N	M	L
	mm	inch	inch	mm	mm	mm	mm	mm	mm
739LMG_ 6 X 1/8	6		G-1/8	4.0	13.8	9/16	15.7	7.1	30.4
739LMG_ 6 X 1/4	6		G-1/4	4.0	18.0	19	15.7	11.2	38.9
739LMG_ 8 X 1/4	8		G-1/4	5.6	18.0	19	16.8	11.2	40.1
739LMG_ 10 X 1/4	10		G-1/4	5.9	18.0	19	17.5	11.2	40.9
739LMG_ 10 X 3/8	10		G-3/8	7.1	21.8	22	17.5	11.2	41.7
739LMG_ 10 X 1/2	10		G-1/2	7.1	26.0	27	17.5	14.2	44.7
739LMG_ 12 X 1/4	12		G-1/4	6.4	18.0	19	23.1	11.2	47.0
739LMG_ 12 X 3/8	12		G-3/8	7.9	21.8	22	23.1	11.2	47.2
739LMG_ 12 X 1/2	12		G-1/2	8.8	26.0	27	23.1	14.2	50.5
739LMG_ 18 X 1/2	18		G-1/2	11.9	26.0	27	24.6	14.2	51.3
739LMG_ 18 X 3/4	18		G-3/4	13.9	32.0	35	24.6	15.7	55.9
739LMG_ 38 X 1 1/2	38		G-1 1/2	31.6	54.7	55	52.8	22.1	91.9

TUBE (INCH) TO ISO PARALLEL THREAD

Ordering Information	A Tube O.D.		T (ISO)	D		K		W Hex. Flat	N		M		L	
	inch	mm	inch	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm
739LMG_ 1/8 X 1/8	1/8	3.17	G-1/8	.08	2.0	.54	13.8	9/16	.53	13.45	.28	7.1	1.22	31.0
739LMG_ 1/8 X 1/4	1/8	6.35	G-1/4	.08	2.0	.71	18.0	3/4	.53	13.45	.44	11.2	1.41	35.8
739LMG_ 1/4 X 1/8	1/4	3.17	G-1/8	.16	4.0	.54	13.8	9/16	.62	15.75	.28	7.1	1.20	30.5
739LMG_ 1/4 X 1/4	1/4	6.35	G-1/4	.17	4.2	.71	18.0	3/4	.62	15.75	.44	11.2	1.42	36.0
739LMG_ 3/8 X 1/4	3/8	6.35	G-1/4	.23	5.8	.71	18.0	3/4	.69	17.50	.44	11.2	1.57	39.9
739LMG_ 3/8 X 3/8	3/8	9.52	G-3/8	.27	6.9	.86	21.8	7/8	.69	17.50	.44	11.2	1.60	40.6
739LMG_ 1/2 X 1/4	1/2	6.35	G-1/4	.23	5.8	.71	18.0	3/4	.91	23.10	.44	11.2	1.85	47.0
739LMG_ 1/2 X 3/8	1/2	9.52	G-3/8	.31	7.9	.86	21.8	7/8	.91	23.10	.44	11.2	1.88	47.7
739LMG_ 1/2 X 1/2	1/2	12.70	G-1/2	.37	9.4	1.02	26.0	1 1/16	.91	23.10	.56	14.2	1.96	49.8
739LMG_ 3/4 X 3/4	3/4	19.05	G-3/4	.59	15.0	1.26	32.0	1 5/16	.97	24.65	.62	15.7	2.16	54.9
739LMG_ 1 X 1	1	25.40	G-1	.78	19.8	1.54	39.0	1 5/8	1.23	31.20	.72	18.3	2.59	65.8

Reference Specifications:

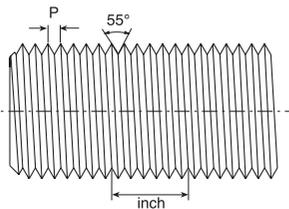


Designation:

Marking LG on Hex.

*Including low friction paste (See page 102).
 "D" - Dimension is minimum opening.
 Dimensions are for reference only and subject to change without notice.

For Parallel Threads Sealing (see page 86).


739 LN
WELD ADAPTER
TUBE TO PIPE

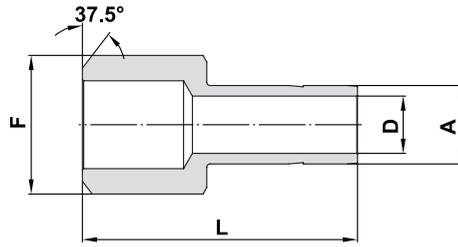

TUBE (INCH)

Ordering Information	A Tube O.D.		F Pipe Size		D		L	
	inch	mm	inch	mm	inch	mm	inch	mm
739LN_ 1/4 X 1/4	1/4	6.35	1/4	13.70	.17	4.20	1.14	28.96
739LN_ 3/8 X 1/2	3/8	9.52	1/2	21.34	.27	6.85	1.46	37.08
739LN_ 1/2 X 1/2	1/2	12.7	1/2	21.34	.37	9.40	1.66	42.15
739LN_ 1/2 X 3/4	1/2	12.7	3/4	26.67	.37	9.40	1.68	42.67
739LN_ 3/4 X 3/4	3/4	19.05	3/4	26.67	.59	15.00	1.87	47.50

739 LW
SOCKET WELD
ADAPTER

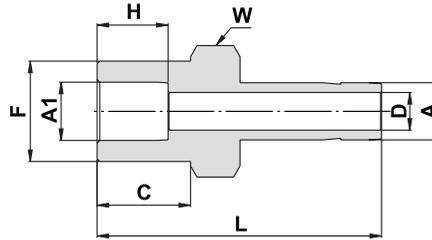

TUBE (METRIC) TO TUBE (INCH)


Ordering Information	A Tube O.D.	A1 Pipe Size	C	D	W	F	H	L
	mm	inch	mm	mm	inch	mm	mm	mm
739LW_ 6 X 1/4	6	1/4	10.4	4.0	1/2	11.2	7.9	31.7
739LW_ 10 X 1/4	10	1/4	10.4	4.8	9/16	11.2	7.9	34.0
739LW_ 10 X 3/8	10	3/8	11.9	7.1	5/8	15.8	9.7	36.0

TUBE (INCH) TO TUBE (INCH)

Ordering Information	A Tube O.D.		A1 Pipe Size		C		D		W		F		H		L	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
739LW_ 1/4 X 1/4	1/4	6.35	1/4	6.35	.41	10.41	.17	4.20	1/2	12.7	.44	11.18	.31	7.90	1.25	31.70
739LW_ 3/8 X 3/8	3/8	9.52	3/8	9.52	.47	11.94	.28	7.11	5/8	15.9	.62	15.75	.38	9.65	1.42	36.70
739LW_ 1/2 X 1/2	1/2	12.7	1/2	12.7	.47	11.94	.39	9.91	13/16	20.6	.75	19.05	.50	12.7	1.67	42.42

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

**739 LMOB
MALE ADAPTER**

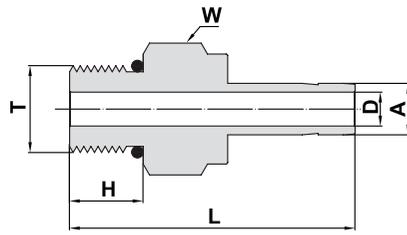

TUBE (INCH) TO SAE/MS STRAIGHT THREAD BOSS³

Ordering Information	A Tube O.D.		T Straight Thread UN	D		W		H		L		O-Ring ²
	inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	
739LMOB_ 1/8 X 5/16-24	1/8	3.18	5/16-24	.08	2.03	7/16	11.1	.30	7.62	1.20	30.48	-902
739LMOB_ 1/4 X 7/16-20	1/4	6.35	7/16-20	.17	4.20	9/16	14.3	.36	9.14	1.39	35.3	-904
739LMOB_ 1/4 X 9/16-18	1/4	6.35	9/16-18	.17	4.20	11/16	17.5	.39	9.90	1.42	36.07	-906
739LMOB_ 3/8 X 7/16-20	3/8	9.52	7/16-20	.20	5.10	9/16	14.3	.36	9.14	1.46	37.08	-904
739LMOB_ 3/8 X 9/16-18	3/8	9.52	9/16-18	.27	6.85	11/16	17.5	.39	9.90	1.52	38.61	-906
739LMOB_ 3/8 X 3/4-16	3/8	9.52	3/4-16	.27	6.85	7/8	22.2	.44	11.17	1.60	40.64	-908
739LMOB_ 1/2 X 9/16-18	1/2	12.7	9/16-18	.28	7.11	11/16	17.5	.39	9.90	1.74	44.20	-906
739LMOB_ 1/2 X 3/4-16	1/2	12.7	3/4-16	.37	9.40	7/8	22.2	.44	11.17	1.82	46.23	-908
739LMOB_ 5/8 X 7/8-14	5/8	15.87	7/8-14	.47	11.94	1	25.4	.50	12.70	1.94	49.28	-910
739LMOB_ 3/4 X 1 1/16-12	3/4	19.05	1 1/16-12	.59	15.00	1 1/4	31.8	.59	14.98	2.10	53.34	-912
739LMOB_ 1 X 1 5/16-12	1	25.40	1 5/16-12	.80	20.32	1 1/2	38.1	.59	14.98	2.41	61.21	-916
739LMOB_ 1 1/4 X 1 5/8-12	1 1/4 ¹	31.75	1 5/8-12	1.02	26.00	1 7/8	47.6	.59	15.10	2.81	71.37	-920
739LMOB_ 1 1/2 X 1 7/8-12	1 1/2 ¹	38.10	1 7/8-12	1.25	31.60	2 1/8	54.0	.59	15.10	3.28	83.31	-924

Designation: Marking LOB on Hex.


¹Supplied assembled with Nut + Front and Back Ferrule. Including low friction paste, see page 102.

²Standard O-rings materials are Fluorocarbon FKM 90 Durometer. Other O-ring materials are available upon request.

³Per SAE J1926 and MS 16142. See page 54 for mounting dimensions.


"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

761 LFL
LET-LOK® TO AN ADAPTER

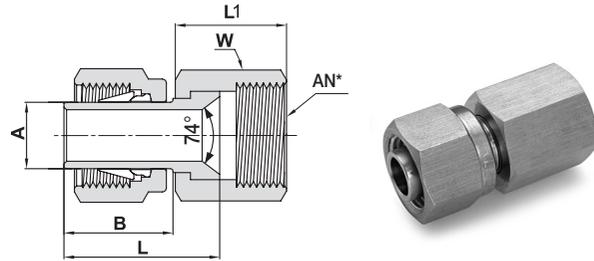

Ordering Information	A Tube O.D.		AN ¹ Tube Flare Size		W Hex. Flat	L		L1		B	
	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm
761LFL_ 1/8 X 1/8	1/8	3.17	1/8	3.17	3/8	.75	19.05	.54	13.71	.53	13.46
761LFL_ 1/8 X 1/4	1/8	3.17	1/4	6.35	9/16	.75	19.05	.61	15.50	.53	13.46
761LFL_ 1/4 X 1/4	1/4	6.35	1/4	6.35	9/16	.84	21.33	.61	15.50	.62	15.75
761LFL_ 3/8 X 3/8	3/8	9.52	3/8	9.52	11/16	.98	24.89	.72	18.30	.69	17.53
761LFL_ 1/2 X 1/2	1/2	12.70	1/2	12.70	7/8	1.25	31.75	.84	21.30	.91	23.11


762 LFL
LET-LOK® TO AN UNION

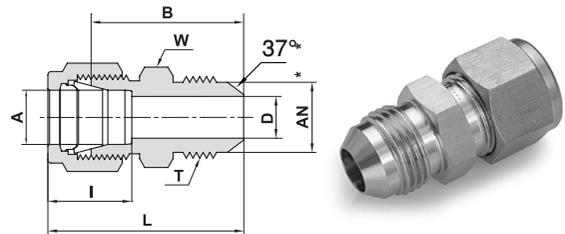

TUBE (INCH) TO TUBE (INCH)

Ordering Information	A Tube O.D.		AN ¹ Tube Flare size		D		W Hex. Flat	B		L		I	T Straight Thread	
	inch	mm	inch	mm	inch	mm	inch	inch	mm	inch	mm	inch	mm	
762LFL_ 1/16 X 1/8	1/16	1.58	1/8	3.17	.05	1.27	7/16	.92	23.36	1.07	27.18	.34	8.6	5/16-24
762LFL_ 1/8 X 1/8	1/8	3.17	1/8	3.17	.06	1.52	7/16	1.01	25.65	1.27	32.26	.50	12.7	5/16-24
762LFL_ 1/8 X 1/4	1/8	3.17	1/4	6.35	.09	2.28	1/2	1.12	28.44	1.38	35.05	.50	12.7	7/16-20
762LFL_ 1/4 X 1/4	1/4	6.35	1/4	6.35	.17	4.31	1/2	1.19	30.22	1.48	37.59	.60	15.2	7/16-20
762LFL_ 3/8 X 1/4	3/8	9.52	1/4	6.35	.17	4.31	5/8	1.27	32.25	1.56	39.62	.66	16.8	7/16-20
762LFL_ 3/8 X 3/8	3/8	9.52	3/8	9.52	.28	7.11	5/8	1.27	32.25	1.56	39.62	.66	16.8	9/16-18
762LFL_ 1/2 X 1/2	1/2	12.70	1/2	12.70	.39	9.90	13/16	1.41	35.8	1.81	45.96	.90	22.9	3/4-16
762LFL_ 3/4 X 3/4	3/4	19.05	3/4	19.05	.61	15.49	1 1/8	1.70	43.18	2.10	53.34	.96	24.4	1 1/16-12
762LFL_ 1 X 1	1	25.40	1	25.40	.84	21.34	1 3/8	1.94	49.28	2.42	61.47	1.23	31.2	1 5/16-12

774 LFL
LET-LOK® TO AN BULKHEAD UNION

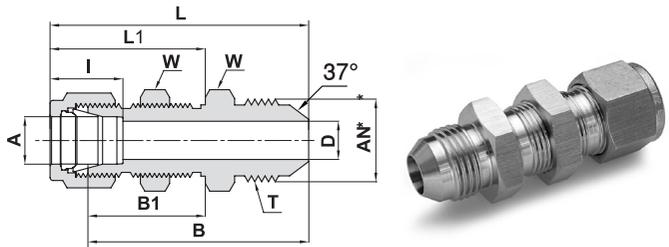


TUBE (INCH) TO TUBE (INCH)

Ordering Information	A Tube O.D.		AN ¹ Tube Flare size		D		W Hex. Flat		B		B1	L		L1	T Straight Thread	Panel Hole Drill Size	Max. Panel Thickness		I				
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	mm	inch	mm	inch	mm	inch	mm				
774LFL_ 1/4 X 1/4	1/4	6.35	1/4	6.35	.17	4.30	5/8	15.9	1.83	46.48	1.03	26.16	2.12	53.84	1.32	33.52	7/16-20	29/64	11.50	.40	10.16	.60	15.2
774LFL_ 3/8 X 3/8	3/8	9.52	3/8	9.52	.28	7.11	3/4	19.1	1.96	49.78	1.16	29.46	2.25	57.15	1.45	36.83	9/16-18	37/64	14.68	.44	11.17	.66	16.8
774LFL_ 1/2 X 1/2	1/2	12.70	1/2	12.70	.39	9.90	15/16	23.8	2.19	55.63	1.25	31.75	2.59	65.79	1.65	41.91	3/4-16	49/64	19.45	.50	12.70	.90	22.9
774LFL_ 3/4 X 3/4	3/4	19.05	3/4	19.05	.61	15.49	1 3/16	30.2	2.71	68.83	1.47	37.34	3.11	78.99	1.87	47.50	1 1/16-12	1 1/64	25.80	.66	16.76	.96	24.4
774LFL_ 1 X 1	1	25.40	1	25.40	.84	21.33	1 5/8	41.3	3.16	80.26	1.78	45.21	3.64	92.46	2.26	57.40	1 5/16-12	1 21/64	33.73	.75	19.05	.23	31.2

¹Flare 37° per SAE J514.

D - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

739 LTFL
MALE ADAPTER
TUBE TO AN

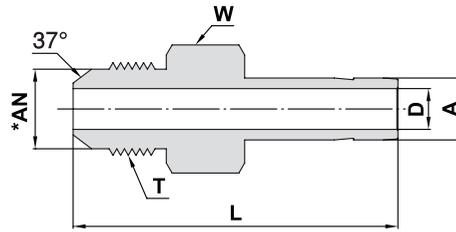

TUBE (INCH) TO TUBE (INCH)

Ordering Information	A Tube O.D.		AN ¹ Thread Flare Size		D		W		L		T Straight Thread
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	
739LTFL_ 1/4 X 1/4	1/4	6.35	1/4	6.35	.17	4.20	1/2	12.7	1.46	37.08	7/16-20
739LTFL_ 3/8 X 1/4	3/8	9.52	1/4	6.35	.17	4.20	1/2	12.7	1.53	38.86	7/16-20
739LTFL_ 3/8 X 3/8	3/8	9.52	3/8	9.52	.28	7.11	5/8	15.9	1.56	39.62	9/16-18
739LTFL_ 1/2 X 1/2	1/2	12.7	1/2	12.7	.39	9.90	13/16	20.6	1.91	48.51	3/4-16
739LTFL_ 5/8 X 5/8	5/8	15.87	5/8	15.87	.484	12.30	15/16	23.8	2.10	53.20	7/8-14
739LTFL_ 3/4 X 3/4	3/4	19.05	3/4	19.05	.59	15.00	1 1/8	28.6	2.21	56.13	1 1/16-12
739LTFL_ 1 X 1	1	25.40	1	25.40	.80	20.32	1 3/8	34.9	2.58	65.53	1 5/16-12

¹Flare 37° per SAE J514

"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

PARALLEL THREADS SEALING


Sealing the parallel thread as 228/1 is done on the shoulder, metal on metal or with the gasket (see tables below).

REFERENCE SPECIFICATIONS:

DIN - ISO 228/1
 BS - 2779
 JIS - B0202
 ISO - 228/1-BSP-P

SEALING WASHER FOR LG END

Bonded Stainless Steel / Carbon Steel Washer

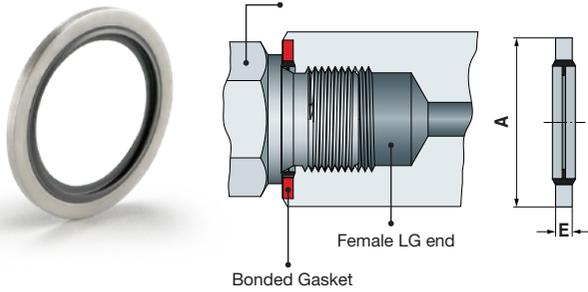

Ordering information		ISO Thread Size	A	E
Stainless Steel 316	Carbon Steel			
SS-GA-LG-1/8	S-GA-LG-1/8	1/8	15.88	2.03
SS-GA-LG-1/4	S-GA-LG-1/4	1/4	20.57	2.03
SS-GA-LG-3/8	S-GA-LG-3/8	3/8	23.80	2.03
SS-GA-LG-1/2	S-GA-LG-1/2	1/2	28.58	2.49
SS-GA-LG-3/4	S-GA-LG-3/4	3/4	34.93	2.49
SS-GA-LG-1	S-GA-LG-1	1	42.80	2.49

ORDERING INFORMATION:


Example:

SS		-	GA-LG-1/4	-	BUNA
Material Description					Inner Ring
SS	Stainless Steel 316				Fluorocarbon FKM
S	Carbon Steel				Buna

All orders should include material description and ordering information (see product table).

Bonded Stainless Steel Washer Recommended in ISO 1179-1973


Compatible with end connections compliant with DIN 3852 Part 2.

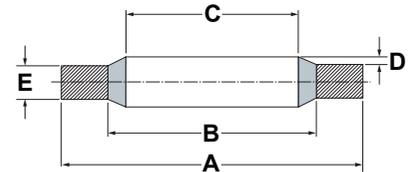

Ordering information	ISO Thread Size	A	B	C	D	E
SS-GA-LG-1/8-ISO-FKM	1/8	14.70	12.00	10.40	0.25	1.25
SS-GA-LG-1/4-ISO-FKM	1/4	18.70	15.75	13.85		
SS-GA-LG-3/8-ISO-FKM	3/8	22.70	19.25	17.35		
SS-GA-LG-1/2-ISO-FKM	1/2	26.70	23.55	21.65		
SS-GA-LG-3/4-ISO-FKM	3/4	32.50	29.20	27.30		
SS-GA-LG-1-ISO-FKM	1	39.50	36.10	34.20		2.00

NOTE: There is a permitted moulding flashline on the inner diameter C in accordance with AGS 1186. All dimensions in mm.


COPPER SEAL GASKET LOK¹ MALE END

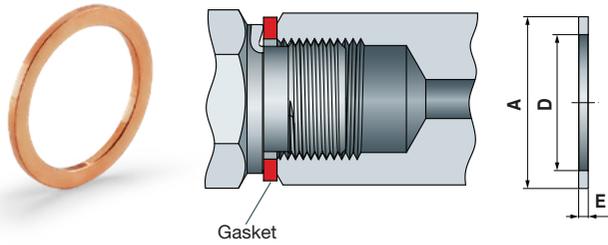

Ordering Information	ISO Thread Size	A		D		E	
		mm	inch	mm	inch	mm	inch
COPPER SEAL GASKET LOK 1/8	1/8	15.0	0.59	9.9	0.39	1.0	0.04
COPPER SEAL GASKET LOK 1/4	1/4	18.8	0.75	13.5	0.52	1.5	0.06
COPPER SEAL GASKET LOK 3/8	3/8	22.9	0.91	17.0	0.66	1.5	0.06
COPPER SEAL GASKET LOK 1/2	1/2	27	1.06	21.3	0.83	1.5	0.06
COPPER SEAL GASKET LOK 3/4	3/4	33.0	1.30	26.7	1.05	2.0	0.08
COPPER SEAL GASKET LOK 1	1	40.6	1.58	33.5	1.31	2.0	0.08

¹Can be used on LG ends


COPPER SEAL GASKET LG FEMALE END

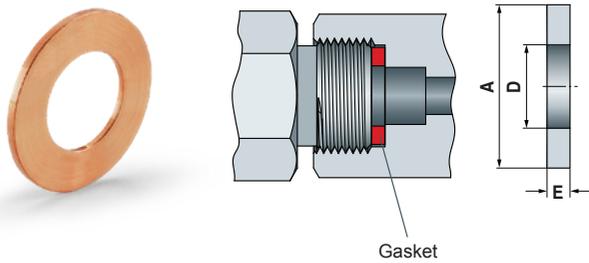

Ordering Information	ISO Thread Size	A		D		E	
		mm	inch	mm	inch	mm	inch
COPPER SEAL GASKET LG 1/4	1/4	10.7	0.42	7.6	0.30	1.8	0.07
COPPER SEAL GASKET LG 3/8	3/8	14.2	0.56	8.6	0.34	2.3	0.09
COPPER SEAL GASKET LG 1/2	1/2	17.8	0.70	9.1	0.36	2.5	0.10


CHROMATOGRAPH FITTINGS

961 L MALE NUT

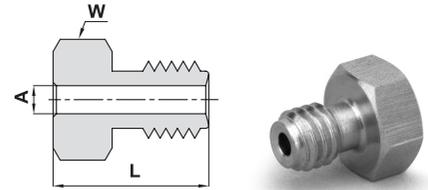


Ordering Information	A Tube O.D.		W Hex. Flat		L	
	inch	mm	inch	mm	inch	mm
961L_ 1/16	1/16	1.58	1/4		.38	9.50

962 L UNION (INCH)

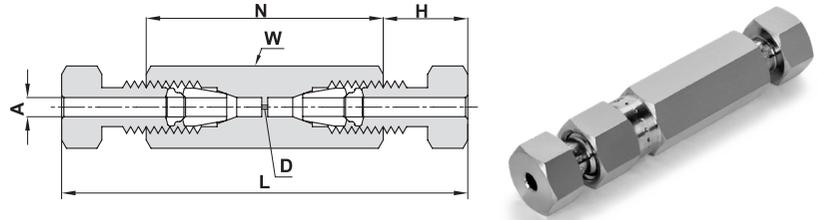


Ordering Information	A Tube O.D.		D		W Hex. Flat		N		H		L		Dead Space
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	
962L_ 1/16	1/16	1.58	.013	.33	1/4		.84	21.34	.20	5.08	1.25	31.75	6.6 X 10 ⁻⁵ CC

963 L REDUCING UNION (INCH)

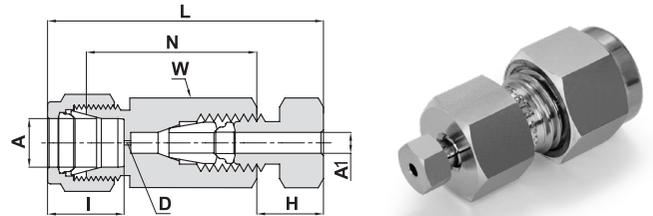

Ordering Information	A Tube O.D.		A1 Tube O.D.		D		W Hex. Flat		N		L		H		I		Dead Space
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	
963L_ 1/4 X 1/16	1/4	6.35	1/16	1.58	.013	.33	1/2		.75	19.05	1.24	31.50	.20	5.08	.60	15.2	6.8 X 10 ⁻⁵ CC
963L_ 3/8 X 1/16	3/8	9.52	1/16	1.58	.013	.33	5/8		.81	20.57	1.30	33.02	.20	5.08	.66	16.8	6.8 X 10 ⁻⁵ CC

964 L UNION TEE

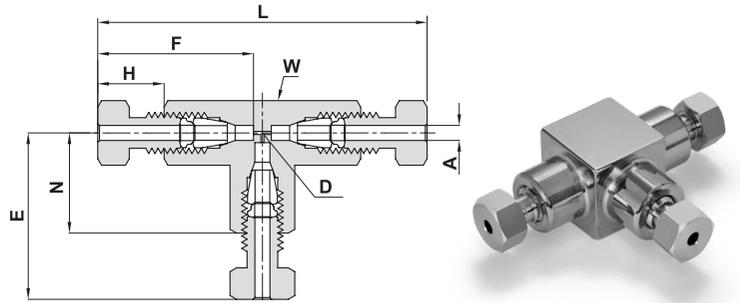


Ordering Information	A Tube O.D.		D		W Wrench Flat		N		H		F		E		L		Dead Space
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	
964L_ 1/16	1/16	1.58	.013	.33	3/8	9.52	.45	11.43	.20	5.08	.61	15.49	.65	16.51	1.30	33.02	2.8 X 10 ⁻⁴ CC


"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

HAM-LET CALIBRATION FITTINGS

768LC
MALE CONNECTOR

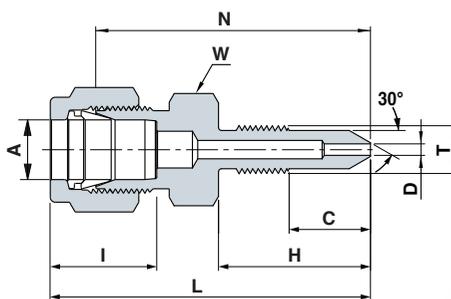

Ordering Information	A Tube O.D.		T Thread UN	D		W Wrench Flat	N		L		H		C		I	
	inch	mm	inch	inch	mm	inch	inch	mm								
768LC SS 1/4 X 1/4-28	1/4	6.35	1/4-28	0.07	1.80	1/2	1.41	35.80	1.70	43.17	0.78	19.80	0.42	10.60	0.60	15.20

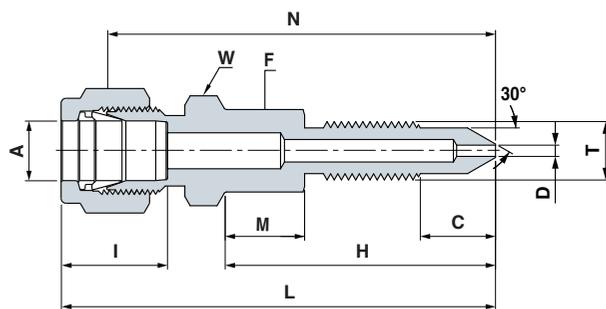

Ordering Information	A Tube O.D.		T Thread UN	D		W Wrench Flat	N		L		H		M		C		F	I		
	inch	mm	inch	inch	mm	inch	inch	mm												
768LC SS 1/4 X 5/16-24	1/4	6.35	5/16-24	0.07	1.80	1/2	2.03	51.60	2.43	61.76	1.41	35.80	0.41	10.40	.039	10.00	0.43	11.00	0.60	15.20

ALLOY 400 NICKEL-COPPER
ALLOY 400/R-405 CONNECTORS

Alloy 400, made of nickel-copper, is a solid-solution alloy that can be hardened only by cold working. It has high strength and toughness over a wide temperature range and excellent resistance to many corrosive environments. Alloy 400 is widely used in many fields, especially marine and chemical processing.

BACK FERRULE 760 LB		
	Ordering Information	Tube O.D.
		inch
	760LB M 1/4	1/4
	760LB M 3/8	3/8
	760LB M 1/2	1/2

FRONT FERRULE 760 LF		
	Ordering Information	Tube O.D.
		inch
	760LF M 1/4	1/4
	760LF M 3/8	3/8
	760LF M 1/2	1/2

NUT 761 L		
	Ordering Information	Tube O.D.
		inch
	761L M 1/4	1/4
	761L M 3/8	3/8
	761L M 1/2	1/2

UNION 762 L		
	Ordering Information	Tube O.D.
		inch
	762L M 1/4	1/4
	762L M 3/8	3/8
	762L M 1/2	1/2

UNION TEE 764 L		
	Ordering Information	Tube O.D.
		inch
	764L M 1/4	1/4
	764L M 3/8	3/8
	764L M 1/2	1/2

UNION ELBOW 765 L		
	Ordering Information	Tube O.D.
		inch
	765L M 1/4	1/4
	765L M 3/8	3/8
	765L M 1/2	1/2

PORT CONNECTOR 767 LP		
	Ordering Information	Tube O.D.
		inch
	767LP M 1/4	1/4
	767LP M 3/8	3/8
	767LP M 1/2	1/2

CAP 7108 L		
	Ordering Information	Tube O.D.
		inch
	7108L M 1/4	1/4
	7108L M 3/8	3/8
	7108L M 1/2	1/2

BULKHEAD UNION 774 L		
	Ordering Information	Tube O.D.
		inch
	774L M 1/4	1/4
	774L M 3/8	3/8
	774L M 1/2	1/2

PLUG 7121 L		
	Ordering Information	Tube O.D.
		inch
	7121L M 1/4	1/4
	7121L M 3/8	3/8
	7121L M 1/2	1/2

ALLOY 400 NICKEL-COPPER	
Barstock	Forging
ASTM B164	ASTM B564

REDUCER 767 LT

	Ordering Information	Tube O.D.	Tube O.D.
	767LT M 1/4 x 1/4		1/4
767LT M 1/4 x 3/8		1/4	3/8
767LT M 1/4 x 1/2		1/4	1/2
767LT M 3/8 x 1/4		3/8	1/4
767LT M 3/8 x 3/8		3/8	3/8
767LT M 3/8 x 1/2		3/8	1/2
767LT M 1/2 x 1/4		1/2	1/4
767LT M 1/2 x 3/8		1/2	3/8
767LT M 1/2 x 1/2		1/2	1/2

MALE ELBOW 769 L

	Ordering Information	Tube O.D.	Male Pipe Size
	769L M 1/4 x 1/4		1/4
769L M 3/8 x 1/4		3/8	1/4
769L M 1/2 x 1/2		1/2	1/2

FEMALE CONNECTOR 766 L

	Ordering Information	Tube O.D.	Male Pipe Size
	766L M 1/4 x 1/4		1/4
766L M 3/8 x 1/4		3/8	1/4

FEMALE ADAPTER 739 LF

	Ordering Information	Tube O.D.	Male Pipe Size
	739LF M 1/4 x 1/8		1/4
739LF M 1/4 x 1/4		1/4	1/4
739LF M 1/4 x 1/2		1/4	1/2
739LF M 3/8 x 1/4		3/8	1/4
739LF M 3/8 x 1/2		3/8	1/2
739LF M 1/2 x 1/4		1/2	1/4
739LF M 1/2 x 1/2		1/2	1/2

MALE CONNECTOR 768 L

	Ordering Information	Tube O.D.	Male Pipe Size
	768L M 1/4 x 1/8		1/4
768L M 1/4 x 1/4		1/4	1/4
768L M 1/4 x 3/8		1/4	3/8
768L M 1/4 x 1/2		1/4	1/2
768L M 3/8 x 1/4		3/8	1/4
768L M 3/8 x 3/8		3/8	3/8
768L M 3/8 x 1/2		3/8	1/2
768L M 1/2 x 1/4		1/2	1/4
768L M 1/2 x 3/8		1/2	3/8
768L M 1/2 x 1/2		1/2	1/2
768L M 1/2 x 3/4		1/2	3/4

MALE ADAPTER 739 LM

	Ordering Information	Tube O.D.	Male Pipe Size
	739LM M 1/4 x 1/8		1/4
739LM M 1/4 x 1/4		1/4	1/4
739LM M 1/4 x 3/8		1/4	3/8
739LM M 1/4 x 1/2		1/4	1/2
739LM M 3/8 x 1/4		3/8	1/4
739LM M 3/8 x 3/8		3/8	3/8
739LM M 3/8 x 1/2		3/8	1/2

LET-LOK TUBING DATA FOR ALLOY 400

Alloy 400 UNS designatin N04400 tubes should be ordered according to ASTM B-165.

Hydraulic tubing is suitable for flaring and bending.

Tubing should be seamless and annealed.

Hardness: 75 HRB maximum

Tube O.D. inch	0.028	0.035	0.049	0.065
1/4	3700	4800	7000	9500
3/8		3100	4400	6100
1/2		2300	3200	4400

Allowable working pressure in psig at -20° to 100°F (-28° to 37°C)

GAS APPLICATION TUBING	
Tube O.D.	Min. Nominal wall thickness
1/2"	.035"

Dimensions are for reference only and subject to change without notice.

ALLOY C-276 CONNECTORS

In aggressive/corrosive service, when nothing else works, many industries traditionally turn to **Alloy C-276**. Many years of outstanding performance in a variety of industrial applications confirmed the advantages of using this alloy.

Excellent Resistance to Corrosion

Alloy C-276 is a nickel-molybdenum-chromium wrought alloy that is generally considered a versatile corrosion-resistant alloy.

C-276 alloy has excellent resistance to localized corrosion and to oxidizing and reducing media. C-276 alloy can be used in severe and corrosive environments because of its versatility.

Alloy C-276 has excellent resistance to a wide variety of chemical process environments including strong oxidizers such as ferric and cupric chlorides, hot contaminated media (organic and inorganic), chlorine, formic and acetic acids, acetic anhydride, seawater and brine solutions. It is used in flue gas desulfurization systems because of its excellent resistance to sulfur compounds and chloride ions encountered in most scrubbers. **C-276** alloy has excellent resistance to pitting and to stress-corrosion cracking. Also, it is one of the few materials that withstands the corrosive effects of wet chlorine gas, hypochlorite and chlorine dioxide.

BACK FERRULE 760 LB		
	Ordering Information	Tube O.D. inch
	760LB HC 1/4	1/4
	760LB HC 3/8	3/8
	760LB HC 1/2	1/2

FRONT FERRULE 760 LF		
	Ordering Information	Tube O.D. inch
	760LF HC 1/4	1/4
	760LF HC 3/8	3/8
	760LF HC 1/2	1/2

NUT 761 L		
	Ordering Information	Tube O.D. inch
	761L HC 1/4	1/4
	761L HC 3/8	3/8
	761L HC 1/2	1/2

UNION 762 L		
	Ordering Information	Tube O.D. inch
	762L HC 1/4	1/4
	762L HC 3/8	3/8
	762L HC 1/2	1/2

UNION TEE 764 L		
	Ordering Information	Tube O.D. inch
	764L HC 1/4	1/4
	764L HC 3/8	3/8
	764L HC 1/2	1/2

UNION ELBOW 765 L		
	Ordering Information	Tube O.D. inch
	765L HC 1/4	1/4
	765L HC 3/8	3/8
	765L HC 1/2	1/2

PORT CONNETTOR 767 LP		
	Ordering Information	Tube O.D. inch
	767LP HC 1/4	1/4
	767LP HC 3/8	3/8
	767LP HC 1/2	1/2

CAP 7108 L		
	Ordering Information	Tube O.D. inch
	7108L HC 1/4	1/4
	7108L HC 3/8	3/8
	7108L HC 1/2	1/2

BULKHEAD UNION 774 L		
	Ordering Information	Tube O.D. inch
	774L HC 1/4	1/4
	774L HC 3/8	3/8
	774L HC 1/2	1/2

PLUG 7121 L		
	Ordering Information	Tube O.D. inch
	7121L HC 1/4	1/4
	7121L HC 3/8	3/8
	7121L HC 1/2	1/2

ALLOY C-276 MATERIAL STD	
Barstock	Forging
ASTM B574	ASTM B564

REDUCER 767 LT

	Ordering Information	Tube O.D.	Tube O.D.
	767LT HC 1/4 x 1/4	1/4	1/4
	767LT HC 1/4 x 3/8	1/4	3/8
	767LT HC 1/4 x 1/2	1/4	1/2
	767LT HC 3/8 x 1/4	3/8	1/4
	767LT HC 3/8 x 3/8	3/8	3/8
	767LT HC 3/8 x 1/2	3/8	1/2
	767LT HC 1/2 x 1/4	1/2	1/4
	767LT HC 1/2 x 3/8	1/2	3/8
	767LT HC 1/2 x 1/2	1/2	1/2

MALE ELBOW 769 L

	Ordering Information	Tube O.D.	Male Pipe Size
	769L HC 1/4 x 1/4	1/4	1/4
	769L HC 3/8 x 1/4	3/8	1/4
	769L HC 1/2 x 1/2	1/2	1/2

FEMALE CONNECTOR 766 L

	Ordering Information	Tube O.D.	Male Pipe Size
	766L HC 1/4 x 1/4	1/4	1/4
	766L HC 3/8 x 1/4	3/8	1/4

FEMALE ADAPTER 739 LF

	Ordering Information	Tube O.D.	Male Pipe Size
	739LF HC 1/4 x 1/8	1/4	1/8
	739LF HC 1/4 x 1/4	1/4	1/4
	739LF HC 1/4 x 1/2	1/4	1/2
	739LF HC 3/8 x 1/4	3/8	1/4
	739LF HC 3/8 x 1/2	3/8	1/2
	739LF HC 1/2 x 1/4	1/2	1/4
	739LF HC 1/2 x 1/2	1/2	1/2

MALE CONNECTOR 768 L

	Ordering Information	Tube O.D.	Male Pipe Size
	768L HC 1/4 x 1/8	1/4	1/8
	768L HC 1/4 x 1/4	1/4	1/4
	768L HC 1/4 x 3/8	1/4	3/8
	768L HC 1/4 x 1/2	1/4	1/2
	768L HC 3/8 x 1/4	3/8	1/4
	768L HC 3/8 x 3/8	3/8	3/8
	768L HC 3/8 x 1/2	3/8	1/2
	768L HC 1/2 x 1/4	1/2	1/4
	768L HC 1/2 x 3/8	1/2	3/8
	768L HC 1/2 x 1/2	1/2	1/2
	768L HC 1/2 x 3/4	1/2	3/4

MALE ADAPTER 739 LM

	Ordering Information	Tube O.D.	Male Pipe Size
	739LM HC 1/4 x 1/8	1/4	1/8
	739LM HC 1/4 x 1/4	1/4	1/4
	739LM HC 1/4 x 1/2	1/4	1/2
	739LM HC 3/8 x 1/4	3/8	1/4
	739LM HC 3/8 x 1/2	3/8	1/2
	739LM HC 1/2 x 1/4	1/2	1/4
	739LM HC 1/2 x 1/2	1/2	1/2

LET-LOK TUBING DATA FOR ALLOY C-276

Alloy C-276 UNS designation N10276 tubes should be ordered according to ASTM B-622.

Hydraulic tubing is suitable for flaring and bending.

Tubing should be seamless and annealed.

Hardness: 100 HRB maximum

Tube O.D.	0.035	0.049	0.065
	Working Pressure (psig)		
1/4"	5100	7500	10200
3/8"	3300	4800	6500
1/2"	2600	3700	5100
GAS APPLICATION TUBING			
Tube O.D.	Min. Nominal wall thickness		
1/2"	.035"		

Dimensions are for reference only and subject to change without notice.

SUPER DUPLEX 2507 CONNECTORS

Duplex stainless-steels are becoming more common for a number of reasons:

- Higher strength levels
- Greater corrosion resistance-particularly Stress Corrosion Cracking (S.C.C.) in chloride-bearing environments.
- Much better resistance for localized corrosion such as pitting and crevice.

The “Pitting Resistances Equivalent Number” (P.R.E.N.) of “SD 2507” (1.4410/S32750) is roughly twice that of Austenitic Stainless Steels such as 304 (1.4301/S30400) or 316 (1.4401/S31600).

- High resistance to erosion-corrosion and corrosion-fatigue mechanism
- Common designation/names/trade names include:
 - SAF 2507
 - UNS S32750
 - EN#1.4410
 - SD 2507

The nominal chemical composition of this alloy is 25% Chromium, 7% Nickel, 4% Molybdenum.

Test approvals: Norsok 650, Norsok 630

BACK FERRULE 760 LB		
	Ordering Information	Tube O.D. inch
		760LB SD 1/4
	760LB SD 3/8	3/8
	760LB SD 1/2	1/2

FRONT FERRULE 760 LF		
	Ordering Information	Tube O.D. inch
		760LF SD 1/4
	760LF SD 3/8	3/8
	760LF SD 1/2	1/2

NUT 761 L		
	Ordering Information	Tube O.D. inch
		761L SD 1/4
	761L SD 3/8	3/8
	761L SD 1/2	1/2

UNION 762 L		
	Ordering Information	Tube O.D. inch
		762L SD 1/4
	762L SD 3/8	3/8
	762L SD 1/2	1/2

UNION TEE 764 L		
	Ordering Information	Tube O.D. inch
		764L SD 1/4
	764L SD 3/8	3/8
	764L SD 1/2	1/2

UNION ELBOW 765 L		
	Ordering Information	Male Pipe Size
		765L SD 1/4
	765L SD 3/8	3/8
	765L SD 1/2	1/2

PORT CONNETOR 767 LP		
	Ordering Information	Tube O.D. inch
		767LP SD 1/4
	767LP SD 3/8	3/8
	767LP SD 1/2	1/2

CAP 7108 L		
	Ordering Information	Tube O.D. inch
		7108L SD 1/4
	7108L SD 3/8	3/8
	7108L SD 1/2	1/2

BULKHEAD UNION 774 L		
	Ordering Information	Tube O.D. inch
		774L SD 1/4
	774L SD 3/8	3/8
	774L SD 1/2	1/2

PLUG 7121 L		
	Ordering Information	Tube O.D. inch
		7121L SD 1/4
	7121L SD 3/8	3/8
	7121L SD 1/2	1/2

SUPER DUPLEX 2507 MATERIAL STD	
Barstock	Forging
ASTMA 479	ASTMA 182

REDUCER 767 LT			
	Ordering Information	Tube O.D.	Tube O.D.
	767LT SD 1/4 X 3/8	1/4	3/8
	767LT SD 1/4 X 1/2	1/4	1/2
	767LT SD 3/8 X 1/4	3/8	1/4
	767LT SD 3/8 X 1/2	3/8	1/2
	767LT SD 1/2 X 1/4	1/2	1/4
	767LT SD 1/2 X 3/8	1/2	3/8

MALE ELBOW 769 L			
	Ordering Information	Tube O.D.	Male Pipe Size
	769L SD 1/4 X 1/4	1/4	1/4
	769L SD 3/8 X 3/8	3/8	1/4
	769L SD 1/2 X 1/2	1/2	1/2

MALE ADAPTER 739 LMOB			
	Ordering Information	Tube O.D.	Male Pipe Size
	739LMOB SD 1/4 X 7/16-20	1/4	7/16-20
	739LMOB SD 3/8 X 7/16-20	3/8	7/16-20
	739LMOB SD 3/8 X 9/16-18	3/8	9/16-18
	739LMOB SD 1/2 X 9/16-18	1/2	9/16-18
	739LMOB SD 1/2 X 3/4-16	1/2	3/4-16

MALE CONNECTOR 768 LOB			
	Ordering Information	Tube O.D.	Male Pipe Size
	768LOB SD 1/4 X 7/16-20	1/4	7/16-20
	768LOB SD 1/4 X 9/16-18	1/4	9/16-18
	768LOB SD 3/8 X 9/16-18	3/8	9/16-18
	768LOB SD 1/2 X 9/16-18	1/2	9/16-18
	768LOB SD 1/2 X 3/4-16	1/2	3/4-16

FEMALE ADAPTOR 739 LF			
	Ordering Information	Tube O.D.	Female Pipe Size
	739LF SD 1/4 X 1/8	1/4	1/8
	739LF SD 1/4 X 1/4	1/4	1/4
	739LF SD 1/4 X 1/2	1/4	1/2
	739LF SD 3/8 X 1/4	3/8	1/4
	739LF SD 3/8 X 1/2	3/8	1/2
	739LF SD 1/2 X 1/4	1/2	1/4
	739LF SD 1/2 X 1/2	1/2	1/2

MALE CONNECTOR 768 L			
	Ordering Information	Tube O.D.	Female Pipe Size
	768L SD 1/4 X 1/4	1/4	1/4
	768L SD 1/4 X 1/2	1/4	1/2
	768L SD 3/8 X 1/4	3/8	1/4
	768L SD 3/8 X 3/8	3/8	3/8
	768L SD 3/8 X 1/2	3/8	1/2
	768L SD 1/2 X 1/4	1/2	1/4
	768L SD 1/2 X 3/8	1/2	3/8
	768L SD 1/2 X 1/2	1/2	1/2

MALE ADAPTER 739 LM			
	Ordering Information	Tube O.D.	Male Pipe Size
	739LM SD 1/4 X 1/4	1/4	1/4
	739LM SD 3/8 X 1/4	3/8	1/4
	739LM SD 3/8 X 3/8	3/8	3/8
	739LM SD 3/8 X 1/2	3/8	1/2
	739LM SD 1/2 X 1/4	1/2	1/4
	739LM SD 1/2 X 1/2	1/2	1/2

UNION CROSS 7102 L			
	Ordering Information	Tube O.D.	Male Pipe Size
	7102L SD 1/4	1/4	1/4
	7102L SD 3/8	3/8	1/4
	7102L SD 1/2	3/8	3/8

LET-LOK TUBING DATA FOR SAE SUPER DUPLEX 2507

Alloy 2507 UNS Designation S32750 tubes should be ordered according to ASTM A789 or equivalent.
Hydraulic tubing is suitable for bending, flaring and should be free of scratches. Tubing should be seamless and fully annealed.
Hardness: 32 HRC maximum

Tube O.D. inch	0.035	0.049	0.065
	Working Pressure (psig)		
1/4	10,000	15,000	-
3/8	6,500	10,000	12,700
1/2	5,000	7,200	10,000

Dimensions are for reference only and subject to change without notice.

ALLOY 825 CONNECTORS



Alloy 825 (UNS Designation N08825) is a Nickel-Iron-Chromium Alloy with Molybdenum and Copper additives.

This alloy is designed to provide exceptional resistance in many corrosive environments along with an improved resistance to aqueous corrosive media.

It has excellent resistance to reducing and oxidizing acids, stress corrosion cracking and to localized attacks such as pitting and crevice corrosion.

Alloy 825 is especially resistant to sulfuric and phosphoric acid.

This alloy is used for chemical processing, pollution-control equipment, oil and gas systems as well as in the nuclear fuel reprocessing, acid production and pickling equipment such as heating coils and chains.

BACK FERRULE 760 LB		
	Ordering Information	Tube O.D. inch
	760LB 825 1/4	1/4
	760LB 825 3/8	3/8
	760LB 825 1/2	1/2
	760LB 825 3/4	3/4

FRONT FERRULE 760 LF		
	Ordering Information	Tube O.D. inch
	760LF 825 1/4	1/4
	760LF 825 3/8	3/8
	760LF 825 1/2	1/2
	760LF 825 3/4	3/4

NUT 761 L		
	Ordering Information	Tube O.D. inch
	761L 825 1/4	1/4
	761L 825 3/8	3/8
	761L 825 1/2	1/2
	761L 825 3/4	3/4

UNION 762 L		
	Ordering Information	Tube O.D. inch
	762L 825 1/4	1/4
	762L 825 3/8	3/8
	762L 825 1/2	1/2
	762L 825 3/4	3/4

UNION TEE 764 L		
	Ordering Information	Tube O.D. inch
	764L 825 1/4	1/4
	764L 825 3/8	3/8
	764L 825 1/2	1/2
	764L 825 3/4	3/4

UNION ELBOW 765 L		
	Ordering Information	Tube O.D. inch
	765L 825 1/4	1/4
	765L 825 3/8	3/8
	765L 825 1/2	1/2
	765L 825 3/4	3/4

PORT CONNETTOR 767 LP		
	Ordering Information	Tube O.D. inch
	767LP 825 1/4	1/4
	767LP 825 3/8	3/8
	767LP 825 1/2	1/2
	767LP 825 3/4	3/4

CAP 7108 L		
	Ordering Information	Tube O.D. inch
	7108L 825 1/4	1/4
	7108L 825 3/8	3/8
	7108L 825 1/2	1/2
	7108L 825 3/4	3/4

BULKHEAD UNION 774 L		
	Ordering Information	Tube O.D. inch
	774L 825 1/4	1/4
	774L 825 3/8	3/8
	774L 825 1/2	1/2
	774L 825 3/4	3/4

PLUG 7121 L		
	Ordering Information	Tube O.D. inch
	7121L 825 1/4	1/4
	7121L 825 3/8	3/8
	7121L 825 1/2	1/2
	7121L 825 3/4	3/4

MALE ELBOW 769 L			
	Ordering Information	Tube O.D.	Male pipe size
	769L 825 1/4 X 1/4	1/4	1/4
	769L 825 3/8 X 3/8	3/8	3/8
	769L 825 1/2 X 1/2	1/2	1/2
	769L 825 3/4 X 3/4	3/4	3/4

ALLOY 825	
Barstock	Forging
ASTM B 425	ASTM B 564

REDUCER 767 LT

	Ordering Information	Tube O.D.	Tube O.D.
	767LT 825 1/4 X 3/8	1/4	3/8
767LT 825 1/4 X 1/2	1/4	1/2	
767LT 825 3/8 X 1/4	3/8	1/4	
767LT 825 3/8 X 1/2	3/8	1/2	
767LT 825 1/2 X 1/4	1/2	1/4	
767LT 825 1/2 X 3/8	1/2	3/8	
767LT 825 3/4 X 1/2	3/4	1/2	
767LT 825 3/4 X 3/4	3/4	3/4	

MALE ADAPTER 739 LMOB

	Ordering Information	Tube O.D.	Tube O.D.
	739LMOB 825 1/4 X 7/16-20	1/4	7/16-20
739LMOB 825 3/8 X 7/16-20	3/8	7/16-20	
739LMOB 825 3/8 X 9/16-18	3/8	9/16-18	
739LMOB 825 1/2 X 9/16-18	1/2	9/16-18	
739LMOB 825 1/2 X 3/4-16	1/2	3/4-16	
739LMOB 825 3/4 X 3/4-16	3/4	3/4-16	
739LMOB 825 3/4 X 1-1/16-12	3/4	1-1/16-12	

MALE CONNECTOR 768 LOB

	Ordering Information	Tube O.D.	Tube O.D.
	768LOB 825 1/4 X 7/16-20	1/4	7/16-20
768LOB 825 1/4 X 9/16-18	1/4	9/16-18	
768LOB 825 3/8 X 9/16-18	3/8	9/16-18	
768LOB 825 1/2 X 9/16-18	1/2	9/16-18	
768LOB 825 1/2 X 3/4-16	1/2	3/4-16	
768LOB 825 3/4 X 3/4-16	3/4	3/4-16	
768LOB 825 3/4 X 1-1/16-12	3/4	1-1/16-12	

MALE CONNECTOR 739 LF

	Ordering Information	Tube O.D.	Female Pipe Size
	739LF 825 1/4 X 1/8	1/4	1/8
739LF 825 1/4 X 1/4	1/4	1/4	
739LF 825 1/4 X 1/2	1/4	1/2	
739LF 825 3/8 X 1/4	3/8	1/4	
739LF 825 3/8 X 1/2	3/8	1/2	
739LF 825 1/2 X 1/4	1/2	1/4	
739LF 825 1/2 X 1/2	1/2	1/2	
739LF 825 3/4 X 1/2	3/4	1/2	
739LF 825 3/4 X 3/4	3/4	3/4	

MALE CONNECTOR 768 L

	Ordering Information	Tube O.D.	Tube O.D.
	768L 825 1/4 X 1/4	1/4	1/4
768L 825 1/4 X 1/2	1/4	1/2	
768L 825 3/8 X 1/4	3/8	1/4	
768L 825 3/8 X 3/8	3/8	3/8	
768L 825 3/8 X 1/2	3/8	1/2	
768L 825 1/2 X 1/4	1/2	1/4	
768L 825 1/2 X 3/8	1/2	3/8	
768L 825 1/2 X 1/2	1/2	1/2	
768L 825 3/4 X 1/4	3/4	1/4	
768L 825 3/4 X 3/8	3/4	3/8	
768L 825 3/4 X 1/2	3/4	1/2	
768L 825 3/4 X 3/4	3/4	3/4	

MALE ADAPTER 739 LM

	Ordering Information	Tube O.D.	Male size
	739LM 825 1/4 X 1/4	1/4	1/4
739LM 825 3/8 X 1/4	3/8	1/4	
739LM 825 3/8 X 3/8	3/8	3/8	
739LM 825 3/8 X 1/2	3/8	1/2	
739LM 825 1/2 X 1/4	1/2	1/4	
739LM 825 1/2 X 1/2	1/2	1/2	
739LM 825 3/4 X 1/2	3/4	1/2	
739LM 825 3/4 X 3/4	3/4	3/4	

UNION CROSS 7102 L

	Ordering Information	Tube O.D.
	7102L 825 1/4	1/4
7102L 825 3/8	3/8	
7102L 825 1/2	1/2	
7102L 825 3/4	3/4	

LET-LOK TUBING DATA FOR ALLOY 825

Alloy 825 UNS Designation N08825 tubes should be ordered according to ASTM B163, ASTM B423 or equivalent.

Suitable for bending, flaring and should be free of scratches.

Tubing should be seamless, high quality and bright fully annealed.

For fully annealed welded and cold drawn tube per ASTM B704 CLASS 1.

Multiply working pressure by 0.85

Hardness: 90 HR15T max or 201Hv max

Tube O.D.	0.035	0.049	0.065	0.083	0.095
	Working Pressure (psig)				
1/4	6,400	9,300	11,600		
3/8	4,100	5,900	8,200		
1/2	3,000	4,300	5,900		
3/4			3,800	4,900	5,800

ALLOY 254 CONNECTORS



Alloy 254/254 SMO/6 Mo (UNS designation S31254) is an austenitic stainless steel with high molybdenum content, super austenitic which gives the alloy a very good resistance to pitting and crevice corrosion. It is especially useful in environments containing halide ions (chloride, bromide and fluoride solutions) such as brackish water, seawater, pulp mill bleach plants and other related high chloride processes.

SMO 254 covers a wide range of applications in several industries, such as chemical and food processing, oil and gas, pulp and paper mill, power generation and desalination plants.

Test approvals: Norsok 650, Norsok 630

SMO 254 characteristics include higher strength, higher resistance to abrasion, erosion and cavitation erosion when compared to austenitic stainless steels such as 316 and 316L and also 317 or 317L. In addition to the above - SMO 254 offers excellent ductility and impact strength at both ambient and sub-zero temperatures.

BACK FERRULE* 760 LB		
	Ordering Information	Tube O.D. inch
	760LB 254 1/4	1/4
	760LB 254 3/8	3/8
	760LB 254 1/2	1/2

FRONT FERRULE* 760 LF		
	Ordering Information	Tube O.D. inch
	760LF 254 1/4	1/4
	760LF 254 3/8	3/8
	760LF 254 1/2	1/2

NUT 761 L		
	Ordering Information	Tube O.D. inch
	761L 254 1/4	1/4
	761L 254 3/8	3/8
	761L 254 1/2	1/2

UNION 762 L		
	Ordering Information	Tube O.D. inch
	762L 254 1/4	1/4
	762L 254 3/8	3/8
	762L 254 1/2	1/2

UNION TEE 764 L		
	Ordering Information	Tube O.D. inch
	764L 254 1/4	1/4
	764L 254 3/8	3/8
	764L 254 1/2	1/2

UNION ELBOW 765 L		
	Ordering Information	Tube O.D. inch
	765L 254 1/4	1/4
	765L 254 3/8	3/8
	765L 254 1/2	1/2

PORT CONNETOR 767 LP		
	Ordering Information	Tube O.D. inch
	767LP 254 1/4	1/4
	767LP 254 3/8	3/8
	767LP 254 1/2	1/2

CAP 7108 L		
	Ordering Information	Tube O.D. inch
	7108L 254 1/4	1/4
	7108L 254 3/8	3/8
	7108L 254 1/2	1/2

BULKHEAD UNION 774 L		
	Ordering Information	Tube O.D. inch
	774L 254 1/4	1/4
	774L 254 3/8	3/8
	774L 254 1/2	1/2

PLUG 7121 L		
	Ordering Information	Tube O.D. inch
	7121L 254 1/4	1/4
	7121L 254 3/8	3/8
	7121L 254 1/2	1/2

ALLOY 254 MATERIAL STD	
Barstock	Forging
ASTM A 479	ASTM A 182

REDUCER 767 LT

	Ordering Information	Tube O.D.	Tube O.D.
	767LT 254 1/4 X 3/8	1/4	3/8
	767LT 254 1/4 X 1/2	1/4	1/2
	767LT 254 3/8 X 1/4	3/8	1/4
	767LT 254 3/8 X 1/2	3/8	1/2
	767LT 254 1/2 X 1/4	1/2	1/4
	767LT 254 1/2 X 3/8	1/2	3/8
	767LT 254 1/2 X 1/2	1/2	1/2

MALE CONNECTOR 768 L

	Ordering Information	Tube O.D.	Tube O.D.
	768L 254 1/4 X 1/4	1/4	1/4
	768L 254 1/4 X 1/2	1/4	1/2
	768L 254 3/8 X 1/4	3/8	1/4
	768L 254 3/8 X 3/8	3/8	3/8
	768L 254 3/8 X 1/2	3/8	1/2
	768L 254 1/2 X 1/4	1/2	1/4
	768L 254 1/2 X 3/8	1/2	3/8
768L 254 1/2 X 1/2	1/2	1/2	

MALE ELBOW 769 L

	Ordering Information	Tube O.D.	Male Pipe Size
	769L 254 1/4 X 1/4	1/4	3/8
	769L 254 3/8 X 3/8	1/4	1/2
769L 254 1/2 X 1/2	3/8	1/4	

MALE ADAPTER 739 LM

	Ordering Information	Tube O.D.	Male size
	739LM 254 1/4 X 1/4	1/4	1/4
	739LM 254 3/8 X 1/4	3/8	1/4
	739LM 254 3/8 X 3/8	3/8	3/8
	739LM 254 3/8 X 1/2	3/8	1/2
	739LM 254 1/2 X 1/4	1/2	1/4
	739LM 254 1/2 X 1/2	1/2	1/2

MALE ADAPTER 739 LMOB

	Ordering Information	Tube O.D.	Male size
	739LMOB 254 1/4 X 7/16-20	1/4	7/16-20
	739LMOB 254 3/8 X 7/16-20	3/8	7/16-20
	739LMOB 254 3/8 X 9/16-18	3/8	9/16-18
	739LMOB 254 1/2 X 9/16-18	1/2	9/16-18
	739LMOB 254 1/2 X 3/4-16	1/2	3/4-16

UNION CROSS 7102 L

	Ordering Information	Tube O.D.
	7102L 254 1/4	1/4
	7102L 254 3/8	3/8
	7102L 254 1/2	1/2

MALE CONNECTOR 768 LOB

	Ordering Information	Tube O.D.	Tube O.D.
	768LOB 254 1/4 X 7/16-20	1/4	7/16-20
	768LOB 254 1/4 X 9/16-18	1/4	9/16-18
	768LOB 254 3/8 X 9/16-18	3/8	9/16-18
	768LOB 254 1/2 X 9/16-18	1/2	9/16-18
	768LOB 254 1/2 X 3/4-16	1/2	3/4-16

LET-LOK TUBING DATA FOR ALLOY 254

Alloy 254 UNS Designation UNS S31254 tubes should be ordered according to ASTM A269 or ASTM A213 or equivalent.
 Suitable for bending, flaring and should be free of scratches.
 Tubing should be seamless, high quality and bright annealed.
 Hardness: 95HRB max.

MALE CONNECTOR 739 LF

	Ordering Information	Tube O.D.	Female Pipe Size
	739LF 254 1/4 X 1/8	1/4	1/8
	739LF 254 1/4 X 1/4	1/4	1/4
	739LF 254 1/4 X 1/2	1/4	1/2
	739LF 254 3/8 X 1/4	3/8	1/4
	739LF 254 3/8 X 1/2	3/8	1/2
	739LF 254 1/2 X 1/4	1/2	1/4
	739LF 254 1/2 X 1/2	1/2	1/2

Tube O.D.	0.035	0.049	0.065	0.083
	Working Pressure (psig)			
1/4	6,900	10,100	13,900	
3/8	4,500	6,500	8,900	
1/2	3,500	5,000	6,900	9,000

DIELECTRIC FITTINGS



Dielectric fittings are designed to insulate subsystems from electrical currents, voltages and static charges.

MATERIALS OF CONSTRUCTION

1. Body: A.I.S.I. 316
2. Insulators: Polyamide-Imide
3. O-Ring: Fluorocarbon FKM 70 Durometer
4. Ring: PTFE

WORKING CONDITIONS:

1. Pressure rating: 5000 psi
2. Temperature rating: -40°C to 93°C (-40°F to 200°F)
3. Electrical resistance at 20°C-25°C (68°F-77°F): 10X106Ω at 30V DC

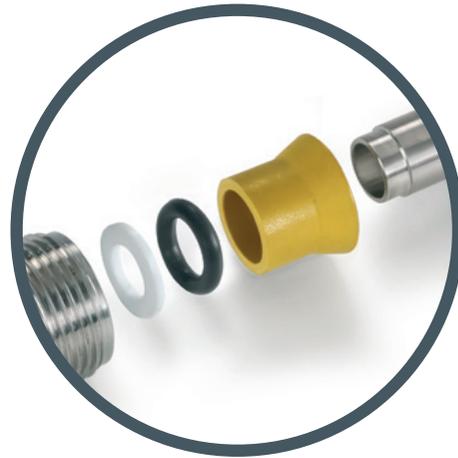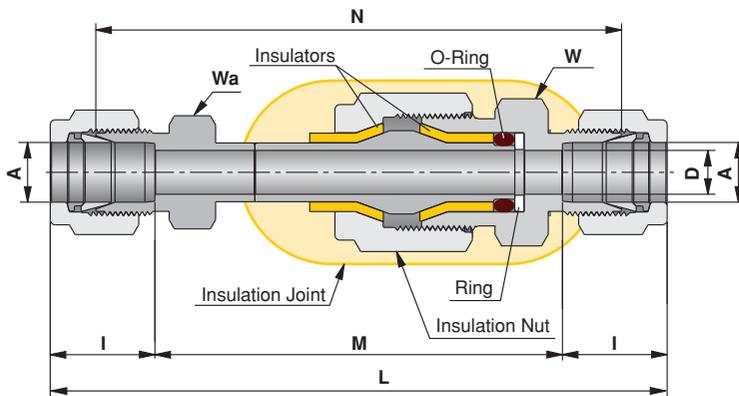

TUBE (METRIC) TO TUBE (METRIC)

Ordering Information	A Tube O.D.		D		W Hex. Flat	Wa Hex. Flat	M		I		N		L	
	inch	mm	inch	mm	inch	inch	inch	mm	inch	mm	inch	mm	inch	mm
762L _ 10 mm Dielectric		10		7.1	22	18	65.85		17.2		84.85		100.3	
762L _ 12 mm Dielectric		12		7.1	22	22	61.70		22.8		87.10		107.3	


TUBE (INCH) TO TUBE (INCH)

Ordering Information	A Tube O.D.		D		W Hex. Flat	Wa Hex. Flat	M		I		N		L	
	inch	mm	inch	mm	inch	inch	inch	mm	inch	mm	inch	mm	inch	mm
762L _ 1/8 Dielectric	1/8	3.17	.09	2.28	13/16	1/2	2.56	65.10	.50	12.7	3.07	77.94	3.59	9.11
762L _ 1/4 Dielectric	1/4	6.35	.19	4.80	13/16	1/2	2.57	65.30	.60	15.2	3.19	81.02	3.77	95.8
762L _ 3/8 Dielectric	3/8	9.52	.28	7.11	13/16	5/8	2.59	65.80	.66	16.8	3.34	84.87	3.92	99.6
762L _ 1/2 Dielectric	1/2	12.70	.28	7.11	13/16	13/16	2.37	60.20	.90	22.9	3.37	85.68	4.17	106.0

"D" - Dimension is minimum opening. Dimensions are for reference only and are subject to change without notice.

TUBE (INCH) TO MALE NPT THREAD

Ordering Information	A Tube O.D.		T (NPT)	D		W Hex. Flat	Wa Hex. Flat	I		N		L	
	inch	mm	inch	inch	mm	inch	inch	inch	mm	inch	mm	inch	mm
768L_ 3/8 X 1/4 Dielectric	3/8	9.52	1/4	.28	7.11	7/8	5/8	.66	16.8	3.44	87.4	3.73	94.7

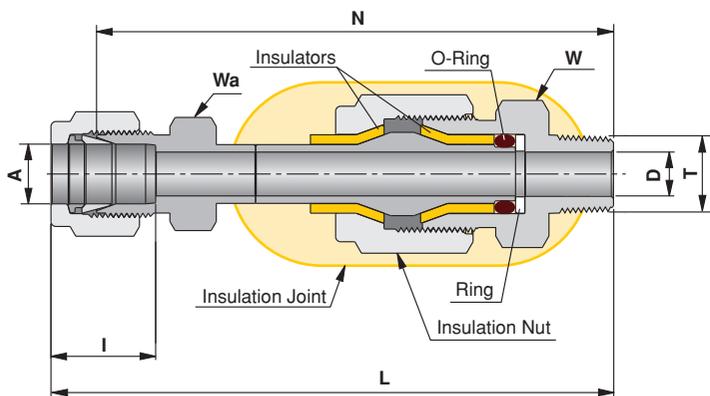


ASSEMBLY INSTRUCTIONS FOR DIELECTRIC FITTINGS

1. Hold Hex A (Back-Up) and tighten nut A according to the LET-LOK assembly instructions (see the LET-LOK catalog for more information).
2. Hold Hex B (Back-Up) and tighten nut B according to the LET-LOK assembly instructions.
CAUTION: DO NOT LOOSEN the INSULATION NUT and DO NOT USE IT as a BACK UP HEX.

NOTES:

1. If the end connection is a Taper Pipe Thread, apply pipe sealant on thread and use Hex A or B as wrenching or as the Backup Hex.
2. For additional types of end connections, please contact your authorized UCT Fluid Solutions representative.

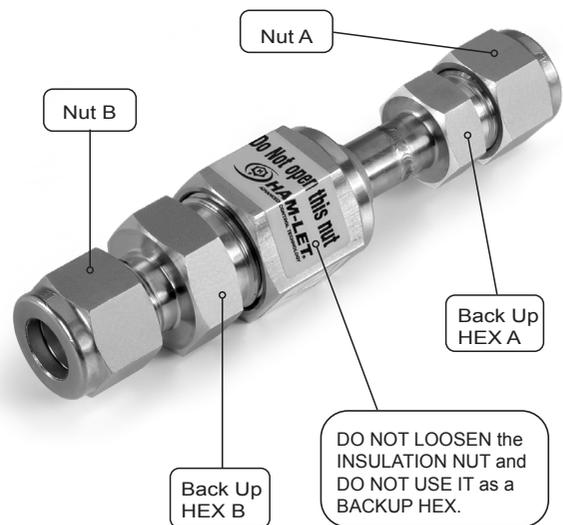

Warning!

The system designer and user have the sole responsibility to select products suitable for their special application requirements and to ensure the proper installation, operation and maintenance of the product. Please consider application details, material compatibility and product ratings when making your selection. Improper selection or use of products can cause property damage or personal injury.


"D" - Dimension is minimum opening. Dimensions are for reference only and subject to change without notice.

G-RAPID PLUS LOW FRICTION PASTE

**INSTALLATION INSTRUCTIONS FOR
LET-LOK FITTINGS
1 1/4"-2"
30mm-50mm**



1. Close the nut and ferrules on the tube with a hydraulic tool
2. Open and release from the tool
3. Apply the G-Rapid paste on areas A and B
4. Tighten the nut on body 1/2 a turn with a wrench

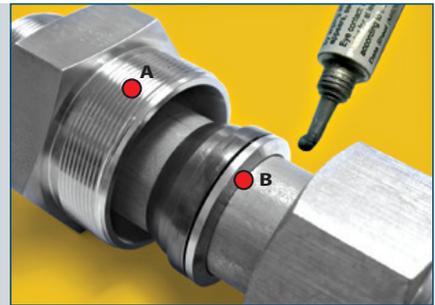


To order:
use part No. 3900753



HIGH SAFETY

In applications where severe conditions and high pressure exist, we recommend the following installation procedures:

1. Check that the nut is finger tight
2. Insert the tube (up to the shoulder)
3. Rotate the nut with a wrench until the tube does not rotate freely
4. Mark position of the nut
5. Rotate the nut 1-1/4 turns

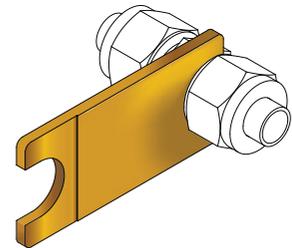

This method ensures that even if the tube O.D. is at the minimum tolerance, the ferrules will be in contact with the tube for the full 1-1/4 rotation.

LET-LOK GAUGE

SIZE:

GAUGE	
PART NO.	Available only in
3900098	"1/4 (6 mm), 3/8", 1/2" (12 mm)

ADDITIONAL SIZES:

LET-LOK GAUGE	
PART NO.	LET-LOK SIZE
3901508	No-GO Gauge 1/16
3901509	No-GO Gauge 1/8"-2-3 mm
3901510	No-GO Gauge 3/16"- 4 mm
3901513	No-GO Gauge 5/16"- 8 mm
3902398	No-GO Gauge 8 mm
3901511	No-GO Gauge 10 mm
3901247	No-GO Gauge 5/8"-14-15-16 mm
3901246	No-GO Gauge 3/4"-18 mm
3901512	No-GO Gauge 7/8"-20-22 mm
3901245	No-GO Gauge 1"-25 mm

"D" - Dimension is minimum opening. Dimensions for reference only and subject to change without notice.

ACCESSORIES



STAINLESS STEEL TUBE CUTTER

Ordering Information	Capacity	
	inch	mm
Tube Cutter	3/16-1	5-25
Replacement Wheel	3/16-1	5-25



REAMERS, DEBURRING TOOLS

Ordering Information	Capacity
In.Out.Reamer 1/4"-1 1/4"	1/4" (5 mm) through 1 1/4" (36 mm)
In.Out.Reamer 1/2"-2"	1/2" (12 mm) through 2" (54 mm)



LEVER TUBE BENDERS

Ordering Information	Capacity	
	Tube Size	Bend Radius
Lever Bender 3/16	3/16"	5/ 8"
Lever Bender 1/4	1/4"	5/8"
Lever Bender 5/16	5/16"	15/16"
Lever Bender 3/8	3/8"	15/16"
Lever Bender 1/2	1/2"	1 1/2"
Lever Bender 6	6 mm	16 mm
Lever Bender 8	8 mm	24 mm
Lever Bender 10	10 mm	24 mm
Lever Bender 12	12 mm	38 mm

PREASSEMBLY TOOL

In constrained installation areas, LET-LOK® fittings can be assembled with the preassembly tool and another second step on the system.

PART NO.	LET-LOK SIZE
3902419	PREASSEMBLY TOOL 1/8
3901658	PREASSEMBLY TOOL 1/4
3901659	PREASSEMBLY TOOL 3/8
3901660	PREASSEMBLY TOOL 1/2
3902719	PREASSEMBLY TOOL 5/8
3902402	PREASSEMBLY TOOL 6MM
3902420	PREASSEMBLY TOOL 8MM
3902421	PREASSEMBLY TOOL 10MM
3902422	PREASSEMBLY TOOL 12MM
3902720	PREASSEMBLY TOOL 14MM
3902721	PREASSEMBLY TOOL 15MM
3902538	PREASSEMBLY TOOL 16MM

INSTRUCTIONS FOR USING PREASSEMBLY TOOL 6MM-25MM, 1/4"-1"

1. Assemble HAM-LET ferrules and nut on the Preassembly Tool. Tighten the nut to finger tight position.
2. Insert the tube through the nut and ferrules until the tube touches the bottom (shoulder).
3. From the finger tight position, rotate the nut 1-1/4 turns (450°).
4. Release the nut from the Preassembly Tool; pull out the tube with the ferrules swaged into the tube.
5. Insert tube with swaged ferrules into the fitting body.
6. Tighten the nut to the finger tight position.
7. To assemble on the fitting, use a wrench to tighten the nut to the original position. An increase of torque will be felt from this point turn the wrench slightly.
Tightening to the original position depends on the tube size. A large tube size will need more tightening than a small size, and the wall thickness has some effect on the tightening.

NOTE:

1. When using the Preassembly Tool, make sure the tool is free of damage and is clean prior to use.
2. Usage of the Preassembly Tool is limited, After permanent use please send tool to UCT Fluid Solutions for evaluation.
3. Soft tubing and tubing at the maximum diameter tolerance can cause the tube to stick to the Preassembly Tool.
In order to remove the stuck tube, please rock the tube back and forth until the tube is released from the tool.



INSTRUCTIONS FOR USING PREASSEMBLY TOOL 2MM-4MM, 1/8"-3/16"


1. Assemble HAM-LET ferrules and nut on the Preassembly Tool, tighten the nut to the finger tight position.
2. Insert the tube through the nut and ferrules until the tube touches the bottom (shoulder).
3. From the finger tight position, rotate the nut 3/4 of a turn (270°).
4. Release the nut from the Preassembly Tool; pull out the tube with the ferrules swaged into the tube.
5. Insert tube with swaged ferrules into the fitting body.
6. Tighten the nut to the finger tight position.
7. To assemble on the fitting, use a wrench to tighten the nut to the original position. An increase of torque will be felt, from this point turn the wrench slightly.

STOP COLLAR

LET-LOK®		D	
inch	inch	mm	
1/4	.69	17.5	
3/8	.84	20.6	
1/2	1.10	27.0	
3/4	1.31	33.3	
1	1.68	42.7	

ASSEMBLY INSTRUCTIONS - STOP COLLAR

1. Remove the nut and ferrules from the fitting.
2. Insert the stop collar.
3. Assemble the nut and ferrules until finger tight.
4. Make up the fitting until the stop collar no longer rotates (feel with finger). At this stage it is guaranteed that the fitting is assembled correctly.



ORDERING INFORMATION FOR ASSEMBLED STOP COLLAR (WITH FITTING)

768L		SS		1/4		1/4		SC	
Fitting Type		SS Stainless Steel 316		Tube O.D.		1/4 NPT		Stop Collar	
Male LET-LOK® Connector Male End Connection		B Brass		The O.D. size is always the first to be described.		X			
		M Alloy 400							
		HC Alloy C-276							
Fitting Material									

ORDERING INFORMATION STOP COLLAR ONLY

STOP COLLAR		1/4	
Stop Collar		Tube O.D.	
		The O.D. size is always the first to be described.	

